

---

**KivyMD**

***Release 1.1.1***

**Andrés Rodríguez, Ivanov Yuri, Artem Bulgakov and KivyMD cont**

**Oct 13, 2022**



# CONTENTS

<b>1</b>	<b>KivyMD</b>	<b>1</b>
<b>2</b>	<b>Contents</b>	<b>3</b>
2.1	Getting Started . . . . .	3
2.2	Themes . . . . .	7
2.3	Components . . . . .	36
2.4	Controllers . . . . .	472
2.5	Behaviors . . . . .	473
2.6	Effects . . . . .	518
2.7	Templates . . . . .	523
2.8	Changelog . . . . .	524
2.9	About . . . . .	536
2.10	KivyMD . . . . .	537
<b>3</b>	<b>Indices and tables</b>	<b>571</b>
	Python Module Index	573
	Index	575




---

# CHAPTER ONE

---

## KIVYMD

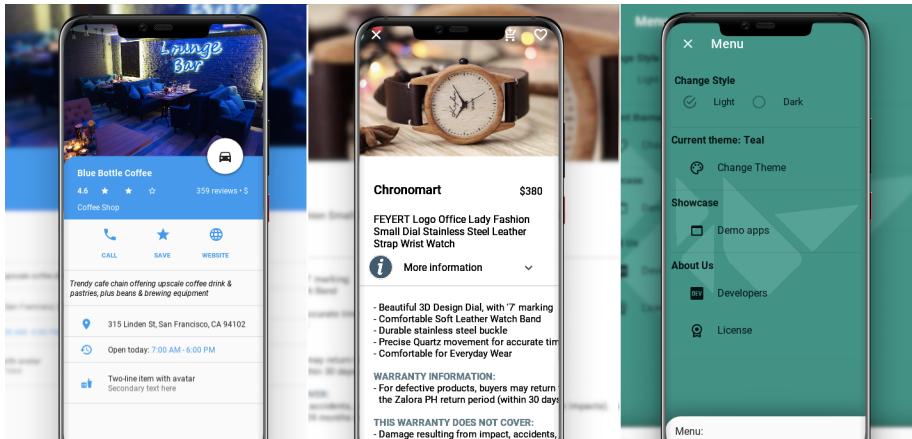

Is a collection of Material Design compliant widgets for use with, Kivy cross-platform graphical framework a framework for cross-platform, touch-enabled graphical applications. The project's goal is to approximate Google's Material Design spec as close as possible without sacrificing ease of use.

This library is a fork of the [KivyMD project](#). We found the strength and brought this project to a new level.

If you wish to become a project developer (permission to create branches on the project without forking for easier collaboration), have at least one PR approved and ask for it. If you contribute regularly to the project the role may be offered to you without asking too.



**CONTENTS**

## 2.1 Getting Started

In order to start using *KivyMD*, you must first install the *Kivy* framework on your computer. Once you have installed *Kivy*, you can install *KivyMD*.

**Warning:** *KivyMD* depends on *Kivy*! Therefore, before using *KivyMD*, first learn how to work with *Kivy*.

### 2.1.1 Installation

```
pip install kivymd
```

Command above will install latest release version of *KivyMD* from [PyPI](#). If you want to install development version from [master](#) branch, you should specify link to zip archive:

```
pip install https://github.com/kivymd/KivyMD/archive/master.zip
```

---

**Note:** Replace *master.zip* with *<commit hash>.zip* (eg *51b8ef0.zip*) to download *KivyMD* from specific commit.

---

Also you can install manually from sources. Just clone the project and run pip:

```
git clone https://github.com/kivymd/KivyMD.git --depth 1
cd KivyMD
pip install .
```

---

**Note:** If you don't need full commit history (about 320 MiB), you can use a shallow clone (*git clone https://github.com/kivymd/KivyMD.git -depth 1*) to save time. If you need full commit history, then remove *-depth 1*.

---

## 2.1.2 First KivyMD application

```
from kivymd.app import MDApp
from kivymd.uix.label import MDLabel

class MainApp(MDApp):
    def build(self):
        return MDLabel(text="Hello, World", halign="center")

MainApp().run()
```

And the equivalent with *Kivy*:

```
from kivy.app import App
from kivy.uix.label import Label

class MainApp(App):
    def build(self):
        return Label(text="Hello, World")

MainApp().run()
```

To left - *Kivy*, to right - *KivyMD*:



At first glance, the *KivyMD* example contains more code... However, the following example already demonstrates how difficult it is to create a custom button in *Kivy*:

```
from kivy.app import App
from kivy.metrics import dp
from kivy.uix.behaviors import TouchRippleBehavior
from kivy.uix.button import Button
from kivy.lang import Builder
from kivy.utils import get_color_from_hex
```

(continues on next page)

(continued from previous page)

```

KV = """
#:import get_color_from_hex kivy.utils.get_color_from_hex

<RectangleFlatButton>:
    ripple_color: 0, 0, 0, .2
    background_color: 0, 0, 0, 0
    color: root.primary_color

    canvas.before:
        Color:
            rgba: root.primary_color
        Line:
            width: 1
            rectangle: (self.x, self.y, self.width, self.height)

Screen:
    canvas:
        Color:
            rgba: get_color_from_hex("#0F0F0F")
        Rectangle:
            pos: self.pos
            size: self.size
"""

class RectangleFlatButton(TouchRippleBehavior, Button):
    primary_color = get_color_from_hex("#EB8933")

    def on_touch_down(self, touch):
        collide_point = self.collide_point(touch.x, touch.y)
        if collide_point:
            touch.grab(self)
            self.ripple_show(touch)
            return True
        return False

    def on_touch_up(self, touch):
        if touch.grab_current is self:
            touch.ungrab(self)
            self.ripple_fade()
            return True
        return False

class MainApp(App):
    def build(self):
        screen = Builder.load_string(KV)
        screen.add_widget(
            RectangleFlatButton(
                text="Hello, World",

```

(continues on next page)

(continued from previous page)

```
        pos_hint={"center_x": 0.5, "center_y": 0.5},
        size_hint=(None, None),
        size=(dp(110), dp(35)),
        ripple_color=(0.8, 0.8, 0.8, 0.5),
    )
)
return screen

MainApp().run()
```

And the equivalent with *KivyMD*:

```
from kivymd.app import MDApp
from kivymd.uix.screen import MDScreen
from kivymd.uix.button import MDRectangleFlatButton

class MainApp(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"

        return (
            MDScreen(
                MDRectangleFlatButton(
                    text="Hello, World",
                    pos_hint={"center_x": 0.5, "center_y": 0.5},
                )
            )
        )

MainApp().run()
```

*KivyMD*:

*Kivy*:

## 2.2 Themes

### 2.2.1 Theming

**See also:**

Material Design spec, Material theming

#### Material App

The main class of your application, which in *Kivy* inherits from the `App` class, in *KivyMD* must inherit from the `MDApp` class. The `MDApp` class has properties that allow you to control application properties such as color/style/font of interface elements and much more.

#### Control material properties

The main application class inherited from the `MDApp` class has the `theme_cls` attribute, with which you control the material properties of your application.

#### Changing the theme colors

The standard `theme_cls` is designed to provide the standard themes and colors as defined by Material Design.

We do not recommend that you change this.

However, if you do need to change the standard colors, for instance to meet branding guidelines, you can do this by overloading the `color_definitions.py` object.

Create a custom color defintion object. This should have the same format as the `colors` object in `color_definitions.py` and contain definitions for at least the primary color, the accent color and the Light and Dark backgrounds.

---

**Note:** Your custom colors *must* use the names of the existing colors as defined in the palette e.g. You can have *Blue* but you cannot have *NavyBlue*.

---

Add the custom theme to the `MDApp` as shown in the following snippet.

Imperative python style with KV

```
from kivy.lang import Builder
from kivy.properties import ObjectProperty

from kivymd.app import MDApp
from kivymd.uix.floatlayout import MDFloatLayout
from kivymd.uix.tab import MDTabsBase
from kivymd.icon_definitions import md_icons

colors = {
    "Teal": {
        "200": "#212121",
```

(continues on next page)

(continued from previous page)

```

        "500": "#212121",
        "700": "#212121",
    },
    "Red": {
        "200": "#C25554",
        "500": "#C25554",
        "700": "#C25554",
    },
    "Light": {
        "StatusBar": "E0E0E0",
        "AppBar": "#202020",
        "Background": "#2E3032",
        "CardsDialogs": "#FFFFFF",
        "FlatButtonDown": "#CCCCCC",
    },
}
}

KV = '''
MDBoxLayout:
    orientation: "vertical"

    MDTopAppBar:
        title: "Custom theme"

    MDTabs:
        id: tabs

<Tab>

    MDIconButton:
        id: icon
        icon: root.icon
        icon_size: "48sp"
        theme_icon_color: "Custom"
        icon_color: "white"
        pos_hint: {"center_x": .5, "center_y": .5}
    ...
}

class Tab(MDFloatLayout, MDTabsBase):
    '''Class implementing content for a tab.'''

    icon = ObjectProperty()

class Example(MDApp):
    icons = list(md_icons.keys())[15:30]

    def build(self):
        self.theme_cls.colors = colors

```

(continues on next page)

(continued from previous page)

```

    self.theme_cls.primary_palette = "Teal"
    self.theme_cls.accent_palette = "Red"
    return Builder.load_string(KV)

def on_start(self):
    for name_tab in self.icons:
        tab = Tab(title="This is " + name_tab, icon=name_tab)
        self.root.ids.tabs.add_widget(tab)

```

```
Example().run()
```

Declarative python style

```

from kivy.properties import ObjectProperty

from kivymd.app import MDApp
from kivymd.uix.boxlayout import MDBoxLayout
from kivymd.uix.button import MDIconButton
from kivymd.uix.floatlayout import MDFloatLayout
from kivymd.uix.tab import MDTabsBase, MDTabs
from kivymd.icon_definitions import md_icons
from kivymd.uix.toolbar import MDTopAppBar

colors = {
    "Teal": {
        "200": "#212121",
        "500": "#212121",
        "700": "#212121",
    },
    "Red": {
        "200": "#C25554",
        "500": "#C25554",
        "700": "#C25554",
    },
    "Light": {
        "StatusBar": "E0E0E0",
        "AppBar": "#202020",
        "Background": "#2E3032",
        "CardsDialogs": "#FFFFFF",
        "FlatButtonDown": "#CCCCCC",
    },
}

class Tab(MDFloatLayout, MDTabsBase):
    '''Class implementing content for a tab.'''

    icon = ObjectProperty()

class Example(MDApp):

```

(continues on next page)

(continued from previous page)

```

icons = list(md_icons.keys())[15:30]


def build(self):
    self.theme_cls.colors = colors
    self.theme_cls.primary_palette = "Teal"
    self.theme_cls.accent_palette = "Red"

    return (
        MDBBoxLayout(
            MDTopAppBar(title="Custom theme"),
            MDTabs(id="tabs"),
            orientation="vertical",
        )
    )

def on_start(self):
    for name_tab in self.icons:
        self.root.ids.tabs.add_widget(
            Tab(
                MDIconButton(
                    icon=name_tab,
                    icon_size="48sp",
                    theme_icon_color="Custom",
                    icon_color="white",
                    pos_hint={"center_x": .5, "center_y": .5},
                ),
                title="This is " + name_tab,
                icon=name_tab,
            )
        )
    )

```

Example().run()

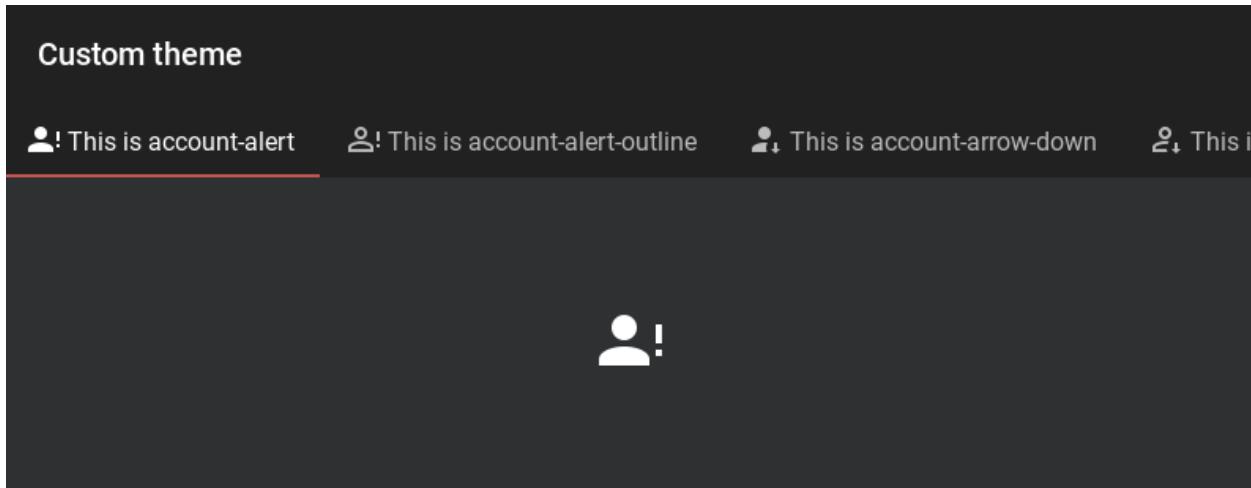

This will change the theme colors to your custom definition. In all other respects, the theming stays as documented.

**Warning:** Please note that the key 'Red' is a required key for the dictionary `kivymd.color_definition.colors`.

## API - `kivymd.theming`

```
class kivymd.theming.ThemeManager(**kwargs)
```

### primary\_palette

The name of the color scheme that the application will use. All major *material* components will have the color of the specified color theme.

Available options are: 'Red', 'Pink', 'Purple', 'DeepPurple', 'Indigo', 'Blue', 'LightBlue', 'Cyan', 'Teal', 'Green', 'LightGreen', 'Lime', 'Yellow', 'Amber', 'Orange', 'DeepOrange', 'Brown', 'Gray', 'BlueGray'.

To change the color scheme of an application:

Imperative python style with KV

```
from kivy.lang import Builder

from kivymd.app import MDApp

KV = '''
MDScreen:

    MDRectangleFlatButton:
        text: "Hello, World"
        pos_hint: {"center_x": .5, "center_y": .5}
'''


class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Red" # "Purple", "Red"

    return Builder.load_string(KV)

Example().run()
```

Declarative python style

```
from kivymd.app import MDApp
from kivymd.uix.button import MDRectangleFlatButton
from kivymd.uix.screen import MDScreen


class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange" # "Purple", "Red"
```

(continues on next page)


(continued from previous page)

```

        return (
            MDScreen(
                MDRectangleFlatButton(
                    text="Hello, World",
                    pos_hint={"center_x": 0.5, "center_y": 0.5},
                )
            )
        )

Example().run()

```

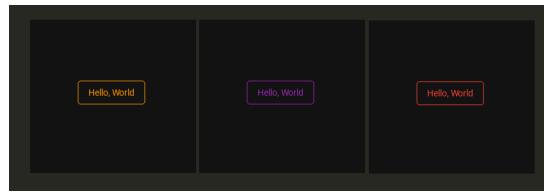

`primary_palette` is an `OptionProperty` and defaults to '*Blue*'.

#### `primary_hue`

The color hue of the application.

Available options are: '50', '100', '200', '300', '400', '500', '600', '700', '800', '900', 'A100', 'A200', 'A400', 'A700'.

To change the hue color scheme of an application:

Imperative python style with KV

```

from kivymd.app import MDApp
from kivymd.uix.screen import MDScreen
from kivymd.uix.button import MDRectangleFlatButton

class MainApp(MDApp):
    def build(self):
        self.theme_cls.primary_palette = "Orange"
        self.theme_cls.primary_hue = "200" # "500"
        screen = MDScreen()
        screen.add_widget(
            MDRectangleFlatButton(
                text="Hello, World",
                pos_hint={"center_x": 0.5, "center_y": 0.5},
            )
        )
    return screen

```

```
MainApp().run()
```

Declarative python style

```

from kivymd.app import MDApp
from kivymd.uix.button import MDRectangleFlatButton
from kivymd.uix.screen import MDScreen


class Example(MDApp):
    def build(self):
        self.theme_cls.primary_palette = "Orange"
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_hue = "200" # "500"

    return (
        MDScreen(
            MDRectangleFlatButton(
                text="Hello, World",
                pos_hint={"center_x": 0.5, "center_y": 0.5},
            )
        )
    )

Example().run()

```

With a value of `self.theme_cls.primary_hue = "200"` and `self.theme_cls.primary_hue = "500"`:

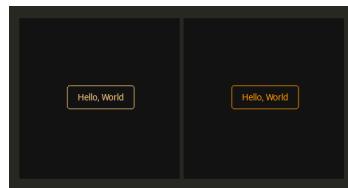

`primary_hue` is an `OptionProperty` and defaults to '500'.

#### **primary\_light\_hue**

Hue value for `primary_light`.

`primary_light_hue` is an `OptionProperty` and defaults to '200'.

#### **primary\_dark\_hue**

Hue value for `primary_dark`.

`primary_light_hue` is an `OptionProperty` and defaults to '700'.

#### **primary\_color**

The color of the current application theme.

`primary_color` is an `AliasProperty` that returns the value of the current application theme, property is readonly.

#### **primary\_light**

Colors of the current application color theme (in lighter color).

Declarative style with KV

```
from kivy.lang import Builder

from kivymd.app import MDApp

KV = '''
MDScreen:

    MDRaisedButton:
        text: "primary_light"
        pos_hint: {"center_x": 0.5, "center_y": 0.7}
        md_bg_color: app.theme_cls.primary_light

    MDRaisedButton:
        text: "primary_color"
        pos_hint: {"center_x": 0.5, "center_y": 0.5}

    MDRaisedButton:
        text: "primary_dark"
        pos_hint: {"center_x": 0.5, "center_y": 0.3}
        md_bg_color: app.theme_cls.primary_dark
'''


class MainApp(MDApp):
    def build(self):
        self.theme_cls.primary_palette = "Orange"
        self.theme_cls.theme_style = "Dark"
        return Builder.load_string(KV)

MainApp().run()
```

Declarative python style

```
from kivymd.app import MDApp
from kivymd.uix.button import MDRaisedButton
from kivymd.uix.screen import MDScreen


class Example(MDApp):
    def build(self):
        self.theme_cls.primary_palette = "Orange"
        self.theme_cls.theme_style = "Dark"

        return (
            MDScreen(
                MDRaisedButton(
                    text="Primary light",
                    pos_hint={"center_x": 0.5, "center_y": 0.7},
                    md_bg_color=self.theme_cls.primary_light,
                ),
                MDRaisedButton(
```

(continues on next page)

(continued from previous page)

```
        text="Primary color",
        pos_hint={"center_x": 0.5, "center_y": 0.5},
),
MDRaisedButton(
    text="Primary dark",
    pos_hint={"center_x": 0.5, "center_y": 0.3},
    md_bg_color=self.theme_cls.primary_dark,
),
)
```

`Example().run()`



`primary_light` is an `AliasProperty` that returns the value of the current application theme (in lighter color), property is readonly.

**primary\_dark**

Colors of the current application color theme (in darker color).

`primary_dark` is an [AliasProperty](#) that returns the value of the current application theme (in darker color), property is readonly.

## accent\_palette

The application color palette used for items such as the tab indicator in the `MDTabsBar` class and so on. See `kivymd.uix.tab.MDTabsBar.indicator_color` attribute.

`accent_palette` is an `OptionProperty` and defaults to 'Amber'.

### accent\_hue

Similar to `primary_hue`, but returns a value for `accent_palette`.

`accent_hue` is an [OptionProperty](#) and defaults to ‘500’.

## accent\_light\_hue

Hue value for *accent\_light*.

`accent_light_hue` is an [OptionProperty](#) and defaults to '200'.

accent dark hue

Hue value for *accent\_dark*.

`accent_dark_hue` is an [OptionProperty](#) and defaults to '700'.

## accent color

Similar to `primary_color`, but returns a value for `accent_color`.

`accent_color` is an `AliasProperty` that returns the value in `rgba` format for `accent_color`, property is readonly.

**accent\_light**

Similar to [primary\\_light](#), but returns a value for [accent\\_light](#).

[accent\\_light](#) is an [AliasProperty](#) that returns the value in `rgba` format for [accent\\_light](#), property is readonly.

**accent\_dark**

Similar to [primary\\_dark](#), but returns a value for [accent\\_dark](#).

[accent\\_dark](#) is an [AliasProperty](#) that returns the value in `rgba` format for [accent\\_dark](#), property is readonly.

**material\_style**

Material design style. Available options are: ‘M2’, ‘M3’.

New in version 1.0.0.

**See also:**

[Material Design 2](#) and [Material Design 3](#)

[material\\_style](#) is an [OptionProperty](#) and defaults to ‘M2’.

**theme\_style\_switch\_animation**

Animate app colors when switching app color scheme (‘Dark/light’).

New in version 1.1.0.

Declarative KV style

```
from kivy.lang import Builder

from kivymd.app import MDApp

KV = '''
MDScreen:

    MDCard:
        orientation: "vertical"
        padding: 0, 0, 0 , "36dp"
        size_hint: .5, .5
        pos_hint: {"center_x": .5, "center_y": .5}
        elevation: 4
        shadow_radius: 6
        shadow_offset: 0, 2

        MDLabel:
            text: "Theme style - {}".format(app.theme_cls.theme_style)
            halign: "center"
            valign: "center"
            bold: True
            font_style: "H5"

        MDRaisedButton:
            text: "Set theme"
            on_release: app.switch_theme_style()
            pos_hint: {"center_x": .5}

    ...
'''
```

(continues on next page)

(continued from previous page)

```

class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style_switch_animation = True
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return Builder.load_string(KV)

    def switch_theme_style(self):
        self.theme_cls.primary_palette = (
            "Orange" if self.theme_cls.primary_palette == "Red" else "Red"
        )
        self.theme_cls.theme_style = (
            "Dark" if self.theme_cls.theme_style == "Light" else "Light"
        )

Example().run()

```

Declarative python style

```

from kivymd.app import MDApp
from kivymd.uix.button import MDRaisedButton
from kivymd.uix.card import MDCard
from kivymd.uix.label import MDLabel
from kivymd.uix.screen import MDScreen

class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style_switch_animation = True
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return (
            MDScreen(
                MDCard(
                    MDLabel(
                        id="label",
                        text="Theme style - {}".format(self.theme_cls.theme_
←style),
                        halign="center",
                        valign="center",
                        bold=True,
                        font_style="H5",
                    ),
                    MDRaisedButton(
                        text="Set theme",
                        on_release=self.switch_theme_style,
                        pos_hint={"center_x": 0.5},
                    ),
                ),
                id="card",
            )

```

(continues on next page)

(continued from previous page)

```

        orientation="vertical",
        padding=(0, 0, 0, "36dp"),
        size_hint=(0.5, 0.5),
        pos_hint={"center_x": 0.5, "center_y": 0.5},
        elevation=4,
        shadow_radius=6,
        shadow_offset=(0, 2),
    )
)
)

def switch_theme_style(self, *args):
    self.theme_cls.primary_palette = (
        "Orange" if self.theme_cls.primary_palette == "Red" else "Red"
    )
    self.theme_cls.theme_style = (
        "Dark" if self.theme_cls.theme_style == "Light" else "Light"
    )
    self.root.ids.card.ids.label.text = (
        "Theme style - {}".format(self.theme_cls.theme_style)
)

```

Example().run()

*theme\_style\_switch\_animation* is an BooleanProperty and defaults to *False*.**theme\_style\_switch\_animation\_duration**

Duration of the animation of switching the color scheme of the application (“Dark/light”).

New in version 1.1.0.

```

class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style_switch_animation = True
        self.theme_cls.theme_style_switch_animation_duration = 0.8

```

*theme\_style\_switch\_animation\_duration* is an NumericProperty and defaults to *0.2*.**theme\_style**

App theme style.

Imperative python style

```

from kivymd.app import MDApp
from kivymd.uix.screen import MDScreen
from kivymd.uix.button import MDRectangleFlatButton

class MainApp(MDApp):
    def build(self):

```

(continues on next page)

(continued from previous page)

```

self.theme_cls.primary_palette = "Orange"
self.theme_cls.theme_style = "Dark" # "Light"
screen = MDScreen()
screen.add_widget(
    MDRectangleFlatButton(
        text="Hello, World",
        pos_hint={"center_x": 0.5, "center_y": 0.5},
    )
)
return screen

MainApp().run()

```

Declarative python style

```


from kivymd.app import MDApp
from kivymd.uix.button import MDRectangleFlatButton
from kivymd.uix.screen import MDScreen

class Example(MDApp):
    def build(self):
        self.theme_cls.primary_palette = "Orange"
        self.theme_cls.theme_style = "Dark" # "Light"

        return (
            MDScreen(
                MDRectangleFlatButton(
                    text="Hello, World",
                    pos_hint={"center_x": 0.5, "center_y": 0.5},
                ),
            ),
        )

Example().run()

```

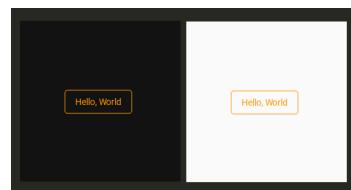*theme\_style* is an `OptionProperty` and defaults to ‘Light’.**bg\_darkest**Similar to `bg_dark`, but the color values are a tone lower (darker) than `bg_dark`.

Declarative style with KV

```
from kivy.lang import Builder
```

(continues on next page)

(continued from previous page)

```

from kivymd.app import MDApp

KV = '''
MDBBoxLayout:

    MDWidget:
        md_bg_color: app.theme_cls.bg_light

    MDBBoxLayout:
        md_bg_color: app.theme_cls.bg_normal

    MDBBoxLayout:
        md_bg_color: app.theme_cls.bg_dark

    MDBBoxLayout:
        md_bg_color: app.theme_cls.bg_darkest
    ...

class MainApp(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark" # "Light"
        return Builder.load_string(KV)

MainApp().run()

```

Declarative python style

```

from kivymd.app import MDApp
from kivymd.uix.boxlayout import MDBBoxLayout
from kivymd.uix.widget import MDWidget

class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark" # "Light"

        return (
            MDBBoxLayout(
                MDWidget(
                    md_bg_color=self.theme_cls.bg_light,
                ),
                MDWidget(
                    md_bg_color=self.theme_cls.bg_normal,
                ),
                MDWidget(
                    md_bg_color=self.theme_cls.bg_dark,
                ),
                MDWidget(
                    md_bg_color=self.theme_cls.bg_darkest,
                ),
            ),


```

(continues on next page)

(continued from previous page)

```
    )
}

Example().run()
```

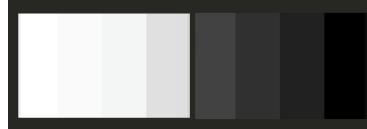

`bg_darkest` is an [AliasProperty](#) that returns the value in `rgba` format for `bg_darkest`, property is readonly.

#### **opposite\_bg\_darkest**

The opposite value of color in the `bg_darkest`.

`opposite_bg_darkest` is an [AliasProperty](#) that returns the value in `rgba` format for `opposite_bg_darkest`, property is readonly.

#### **bg\_dark**

Similar to `bg_normal`, but the color values are one tone lower (darker) than `bg_normal`.

`bg_dark` is an [AliasProperty](#) that returns the value in `rgba` format for `bg_dark`, property is readonly.

#### **opposite\_bg\_dark**

The opposite value of color in the `bg_dark`.

`opposite_bg_dark` is an [AliasProperty](#) that returns the value in `rgba` format for `opposite_bg_dark`, property is readonly.

#### **bg\_normal**

Similar to `bg_light`, but the color values are one tone lower (darker) than `bg_light`.

`bg_normal` is an [AliasProperty](#) that returns the value in `rgba` format for `bg_normal`, property is readonly.

#### **opposite\_bg\_normal**

The opposite value of color in the `bg_normal`.

`opposite_bg_normal` is an [AliasProperty](#) that returns the value in `rgba` format for `opposite_bg_normal`, property is readonly.

#### **bg\_light**

” Depending on the style of the theme (‘Dark’ or ‘Light’) that the application uses, `bg_light` contains the color value in `rgba` format for the widgets background.

`bg_light` is an [AliasProperty](#) that returns the value in `rgba` format for `bg_light`, property is readonly.

#### **opposite\_bg\_light**

The opposite value of color in the `bg_light`.

`opposite_bg_light` is an [AliasProperty](#) that returns the value in `rgba` format for `opposite_bg_light`, property is readonly.

#### **divider\_color**

Color for dividing lines such as `MDSeparator`.

`divider_color` is an [AliasProperty](#) that returns the value in `rgba` format for `divider_color`, property is readonly.

### **opposite\_divider\_color**

The opposite value of color in the *divider\_color*.

*opposite\_divider\_color* is an `AliasProperty` that returns the value in `rgba` format for *opposite\_divider\_color*, property is readonly.

### **disabled\_primary\_color**

The greyscale disabled version of the current application theme color in `rgba` format.

New in version 1.0.0.

*disabled\_primary\_color* is an `AliasProperty` that returns the value in `rgba` format for *disabled\_primary\_color*, property is readonly.

### **opposite\_disabled\_primary\_color**

The opposite value of color in the *disabled\_primary\_color*.

New in version 1.0.0.

*opposite\_disabled\_primary\_color* is an `AliasProperty` that returns the value in `rgba` format for *opposite\_disabled\_primary\_color*, property is readonly.

### **text\_color**

Color of the text used in the `MDLabel`.

*text\_color* is an `AliasProperty` that returns the value in `rgba` format for *text\_color*, property is readonly.

### **opposite\_text\_color**

The opposite value of color in the *text\_color*.

*opposite\_text\_color* is an `AliasProperty` that returns the value in `rgba` format for *opposite\_text\_color*, property is readonly.

### **secondary\_text\_color**

The color for the secondary text that is used in classes from the module `TwoLineListItem`.

*secondary\_text\_color* is an `AliasProperty` that returns the value in `rgba` format for *secondary\_text\_color*, property is readonly.

### **opposite\_secondary\_text\_color**

The opposite value of color in the *secondary\_text\_color*.

*opposite\_secondary\_text\_color* is an `AliasProperty` that returns the value in `rgba` format for *opposite\_secondary\_text\_color*, property is readonly.

### **icon\_color**

Color of the icon used in the `MDIconButton`.

*icon\_color* is an `AliasProperty` that returns the value in `rgba` format for *icon\_color*, property is readonly.

### **opposite\_icon\_color**

The opposite value of color in the *icon\_color*.

*opposite\_icon\_color* is an `AliasProperty` that returns the value in `rgba` format for *opposite\_icon\_color*, property is readonly.

**disabled\_hint\_text\_color**

Color of the disabled text used in the MDTextField.

*disabled\_hint\_text\_color* is an [AliasProperty](#) that returns the value in `rgba` format for *disabled\_hint\_text\_color*, property is readonly.

**opposite\_disabled\_hint\_text\_color**

The opposite value of color in the *disabled\_hint\_text\_color*.

*opposite\_disabled\_hint\_text\_color* is an [AliasProperty](#) that returns the value in `rgba` format for *opposite\_disabled\_hint\_text\_color*, property is readonly.

**error\_color**

Color of the error text used in the MDTextField.

*error\_color* is an [AliasProperty](#) that returns the value in `rgba` format for *error\_color*, property is readonly.

**ripple\_color**

Color of ripple effects.

*ripple\_color* is an [AliasProperty](#) that returns the value in `rgba` format for *ripple\_color*, property is readonly.

**device\_orientation**

Device orientation.

*device\_orientation* is an [StringProperty](#).

**standard\_increment**

Value of standard increment.

*standard\_increment* is an [AliasProperty](#) that returns the value in `rgba` format for *standard\_increment*, property is readonly.

**horizontal\_margins**

Value of horizontal margins.

*horizontal\_margins* is an [AliasProperty](#) that returns the value in `rgba` format for *horizontal\_margins*, property is readonly.

**font\_styles**

Data of default font styles.

Declarative style with KV

```
from kivy.core.text import LabelBase
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.font_definitions import theme_font_styles

KV = '''
MDScreen:

    MDLabel:
        text: "JetBrainsMono"
        halign: "center"
        font_style: "JetBrainsMono"
```

(continues on next page)

(continued from previous page)

```

'''


class MainApp(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"

        LabelBase.register(
            name="JetBrainsMono",
            fn_regular="JetBrainsMono-Regular.ttf")

        theme_font_styles.append('JetBrainsMono')
        self.theme_cls.font_styles["JetBrainsMono"] = [
            "JetBrainsMono",
            16,
            False,
            0.15,
        ]
        return Builder.load_string(KV)
    MainApp().run()

```

Declarative python style

```

from kivy.core.text import LabelBase

from kivymd.app import MDApp
from kivymd.uix.screen import MDScreen
from kivymd.uix.label import MDLabel
from kivymd.font_definitions import theme_font_styles


class MainApp(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"

        LabelBase.register(
            name="JetBrainsMono",
            fn_regular="JetBrainsMono-Regular.ttf")

        theme_font_styles.append('JetBrainsMono')
        self.theme_cls.font_styles["JetBrainsMono"] = [
            "JetBrainsMono",
            16,
            False,
            0.15,
        ]
        return (
            MDScreen(
                MDLabel(
                    text="JetBrainsMono",

```

(continues on next page)

(continued from previous page)

```

        halign="center",
        font_style="JetBrainsMono",
    )
)
)

MainApp().run()

```



`font_styles` is an `DictProperty`.

`on_theme_style(self, interval: int, theme_style: str)`

`set_clearcolor_by_theme_style(self, theme_style)`

`set_colors(self, primary_palette: str, primary_hue: str, primary_light_hue: str, primary_dark_hue: str, accent_palette: str, accent_hue: str, accent_light_hue: str, accent_dark_hue: str)`

Courtesy method to allow all of the theme color attributes to be set in one call.

`set_colors` allows all of the following to be set in one method call:

- primary palette color,
- primary hue,
- primary light hue,
- primary dark hue,
- accent palette color,
- accent hue,
- accent light hue, and
- accent dark hue.

Note that all values *must* be provided. If you only want to set one or two values use the appropriate method call for that.

Imperative python style

```

from kivymd.app import MDApp
from kivymd.uix.screen import MDScreen
from kivymd.uix.button import MDRectangleFlatButton

class MainApp(MDApp):
    def build(self):
        self.theme_cls.set_colors(
            "Blue", "600", "50", "800", "Teal", "600", "100", "800"
        )
        screen = MDScreen()

```

(continues on next page)

(continued from previous page)

```
        screen.add_widget(
            MDRectangleFlatButton(
                text="Hello, World",
                pos_hint={"center_x": 0.5, "center_y": 0.5},
            )
        )
    return screen

MainApp().run()
```

Declarative python style

```
from kivymd.app import MDApp
from kivymd.uix.screen import MDScreen
from kivymd.uix.button import MDRectangleFlatButton

class MainApp(MDApp):
    def build(self):
        self.theme_cls.set_colors(
            "Blue", "600", "50", "800", "Teal", "600", "100", "800"
        )
        return (
            MDScreen(
                MDRectangleFlatButton(
                    text="Hello, World",
                    pos_hint={"center_x": 0.5, "center_y": 0.5},
                )
            )
        )

MainApp().run()
```

```
sync_theme_styles(self, *args)

class kivymd.theming.ThemableBehavior(**kwargs)

theme_cls
    Instance of ThemeManager class.
    theme_cls is an ObjectProperty.


device_ios
    True if device is iOS.
    device_ios is an BooleanProperty.

widget_style
    Allows to set one of the three style properties for the widget: 'android', 'ios', 'desktop'.
    For example, for the class MDSwitch has two styles - 'android' and 'ios':
```

```
MDSwitch:
    widget_style: "ios"
```

```
MDSwitch:
```

```
    widget_style: "android"
```

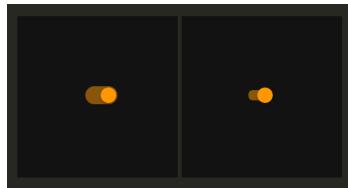

`widget_style` is an [OptionProperty](#) and defaults to '*android*'.

#### opposite\_colors

For some widgets, for example, for a widget `MDTopAppBar` changes the color of the label to the color opposite to the main theme.

```
MDTopAppBar:
```

```
    title: "MDTopAppBar"
    opposite_colors: True
```

```
MDTopAppBar:
```

```
    title: "MDTopAppBar"
    opposite_colors: True
```

`dec_disabled(self, *args, **kwargs)`

## 2.2.2 Material App

This module contains `MDApp` class that is inherited from `App`. `MDApp` has some properties needed for KivyMD library (like `theme_cls`). You can turn on the monitor displaying the current FPS value in your application:

```
KV = '''
MDScreen:
    MDLabel:
        text: "Hello, World!"
        halign: "center"
...
from kivy.lang import Builder
from kivymd.app import MDApp
```

(continues on next page)

(continued from previous page)

```
class MainApp(MDApp):
    def build(self):
        return Builder.load_string(KV)

    def on_start(self):
        self.fps_monitor_start()

MainApp().run()
```



## API - kivymd.app

`class kivymd.app.MDApp(**kwargs)`

Application class, see [App](#) class documentation for more information.

### icon

See `icon` attribute for more information.

New in version 1.1.0.

`icon` is an [StringProperty](#) adn default to `kivymd/images/logo/kivymd-icon-512.png`.

### theme\_cls

Instance of [ThemeManager](#) class.

**Warning:** The `theme_cls` attribute is already available in a class that is inherited from the `MDApp` class. The following code will result in an error!

```
class MainApp(MDApp):
    theme_cls = ThemeManager()
    theme_cls.primary_palette = "Teal"
```

**Note:** Correctly do as shown below!

```
class MainApp(MDApp):
    def build(self):
        self.theme_cls.primary_palette = "Teal"
```

`theme_cls` is an [ObjectProperty](#).

`load_all_kv_files(self, path_to_directory: str)`

Recursively loads KV files from the selected directory.

New in version 1.0.0.

## 2.2.3 Color Definitions

### See also:

[Material Design spec, The color system](#)

[Material Design spec, The color tool](#)

Material colors palette to use in `kivymd.theming.ThemeManager.colors` is a dict-in-dict where the first key is a value from `palette` and the second key is a value from `hue`. Color is a hex value, a string of 6 characters (0-9, A-F) written in uppercase.

For example, `colors["Red"]["900"]` is "B71C1C".

## API - kivymd.color\_definitions

### kivymd.color\_definitions.colors

Color palette. Taken from 2014 Material Design color palettes.

To demonstrate the shades of the palette, you can run the following code:

```
from kivy.lang import Builder
from kivy.properties import ListProperty, StringProperty

from kivymd.color_definitions import colors
from kivymd.uix.tab import MDTabsBase
from kivymd.uix.boxlayout import MDBBoxLayout

demo = '''
<Root@MDBBoxLayout>
    orientation: 'vertical'

    MDTopAppBar:
        title: app.title

    MDTabs:
        id: android_tabs
        on_tab_switch: app.on_tab_switch(*args)
        size_hint_y: None
        height: "48dp"
        tab_indicator_anim: False

        RecycleView:
            id: rv
            key_viewclass: "viewclass"
            key_size: "height"

            RecycleBoxLayout:
                default_size: None, dp(48)
                default_size_hint: 1, None
                size_hint_y: None
                height: self.minimum_height
                orientation: "vertical"

    <ItemColor>
        size_hint_y: None
        height: "42dp"

        MDLabel:
            text: root.text
            halign: "center"

    <Tab>
    ...

from kivy.factory import Factory
```

(continues on next page)

(continued from previous page)

```
from kivymd.app import MDApp

class Tab(MDBoxLayout, MDTabsBase):
    pass

class ItemColor(MDBoxLayout):
    text = StringProperty()
    color = ListProperty()

class Palette(MDApp):
    title = "Colors definitions"

    def build(self):
        Builder.load_string(demo)
        self.screen = Factory.Root()

        for name_tab in colors.keys():
            tab = Tab(title=name_tab)
            self.screen.ids.android_tabs.add_widget(tab)
        return self.screen

    def on_tab_switch(
        self, instance_tabs, instance_tab, instance_tabs_label, tab_text
    ):
        self.screen.ids.rv.data = []
        if not tab_text:
            tab_text = 'Red'
        for value_color in colors[tab_text]:
            self.screen.ids.rv.data.append(
                {
                    "viewclass": "ItemColor",
                    "md_bg_color": colors[tab_text][value_color],
                    "title": value_color,
                }
            )

    def on_start(self):
        self.on_tab_switch(
            None,
            None,
            None,
            self.screen.ids.android_tabs.ids.layout.children[-1].text,
        )

Palette().run()
```

```
kivymd.color_definitions.palette = ['Red', 'Pink', 'Purple', 'DeepPurple', 'Indigo',  
'Blue', 'LightBlue', 'Cyan', 'Teal', 'Green', 'LightGreen', 'Lime', 'Yellow', 'Amber',  
'Orange', 'DeepOrange', 'Brown', 'Gray', 'BlueGray']
```

Valid values for color palette selecting.

```
kivymd.color_definitions.hue = ['50', '100', '200', '300', '400', '500', '600', '700',  
'800', '900', 'A100', 'A200', 'A400', 'A700']
```

Valid values for color hue selecting.

**kivymd.color\_definitions.light\_colors**

Which colors are light. Other are dark.

**kivymd.color\_definitions.text\_colors**

Text colors generated from *light\_colors*. “000000” for light and “FFFFFF” for dark.

How to generate text\_colors dict

```
text_colors = {}  
for p in palette:  
    text_colors[p] = {}  
    for h in hue:  
        if h in light_colors[p]:  
            text_colors[p][h] = "000000"  
        else:  
            text_colors[p][h] = "FFFFFF"
```


```
kivymd.color_definitions.theme_colors = ['Primary', 'Secondary', 'Background', 'Surface',  
'Error', 'On_Primary', 'On_Secondary', 'On_Background', 'On_Surface', 'On_Error']
```

Valid theme colors.

### 2.2.4 Icon Definitions

**See also:**

Material Design Icons

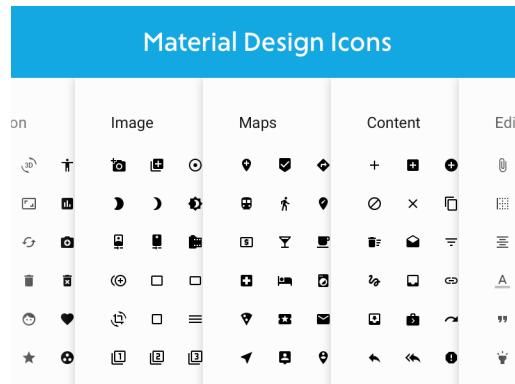

List of icons from materialdesignicons.com. These expanded material design icons are maintained by Austin Andrews (Templarian on Github).

LAST UPDATED: Version 7.0.96

To preview the icons and their names, you can use the following application:

```
from kivy.lang import Builder
from kivy.properties import StringProperty
from kivy.uix.screenmanager import Screen

from kivymd.icon_definitions import md_icons
from kivymd.app import MDApp
from kivymd.uix.list import OneLineIconListItem


Builder.load_string(
    '''
#:import images_path kivymd.images_path

<CustomOneLineIconListItem>

    IconLeftWidget:
        icon: root.icon

<PreviousMDIcons>

    MDBBoxLayout:
        orientation: 'vertical'
        spacing: dp(10)
        padding: dp(20)

        MDBBoxLayout:
            adaptive_height: True

            MDIconButton:
                icon: 'magnify'

            MDTextField:
                id: search_field
                hint_text: 'Search icon'
                on_text: root.set_list_md_icons(self.text, True)

        RecycleView:
            id: rv
            key_viewclass: 'viewclass'
            key_size: 'height'

            RecycleBoxLayout:
                padding: dp(10)
                default_size: None, dp(48)
                default_size_hint: 1, None
                size_hint_y: None
                height: self.minimum_height
                orientation: 'vertical'
    
```

(continues on next page)

(continued from previous page)

```
'''  
)  
  
class CustomOneLineIconListItem(OneLineIconListItem):  
    icon = StringProperty()  
  
class PreviousMDIcons(Screen):  
  
    def set_list_md_icons(self, text="", search=False):  
        '''Builds a list of icons for the screen MDIcons.'''  
  
        def add_icon_item(name_icon):  
            self.ids.rv.data.append(  
                {  
                    "viewclass": "CustomOneLineIconListItem",  
                    "icon": name_icon,  
                    "text": name_icon,  
                    "callback": lambda x: x,  
                }  
            )  
  
            self.ids.rv.data = []  
            for name_icon in md_icons.keys():  
                if search:  
                    if text in name_icon:  
                        add_icon_item(name_icon)  
                else:  
                    add_icon_item(name_icon)  
  
class MainApp(MDApp):  
    def __init__(self, **kwargs):  
        super().__init__(**kwargs)  
        self.screen = PreviousMDIcons()  
  
    def build(self):  
        return self.screen  
  
    def on_start(self):  
        self.screen.set_list_md_icons()  
  
MainApp().run()
```

**API - kivymd.icon\_definitions**

```
kivymd.icon_definitions.md_icons
```

## 2.2.5 Font Definitions

**See also:**

Material Design spec, The type system

**API - kivymd.font\_definitions**

```
kivymd.font_definitions.fonts
```

```
kivymd.font_definitions.theme_font_styles = ['H1', 'H2', 'H3', 'H4', 'H5', 'H6',
'Subtitle1', 'Subtitle2', 'Body1', 'Body2', 'Button', 'Caption', 'Overline', 'Icon']
```

Scale Category	Typeface	Font	Size	Case	Letter spacing
H1	Roboto	Light	96	Sentence	-1.5
H2	Roboto	Light	60	Sentence	-0.5
H3	Roboto	Regular	48	Sentence	0
H4	Roboto	Regular	34	Sentence	0.25
H5	Roboto	Regular	24	Sentence	0
H6	Roboto	Medium	20	Sentence	0.15
Subtitle 1	Roboto	Regular	16	Sentence	0.15
Subtitle 2	Roboto	Medium	14	Sentence	0.1
Body 1	Roboto	Regular	16	Sentence	0.5
Body 2	Roboto	Regular	14	Sentence	0.25
BUTTON	Roboto	Medium	14	All caps	1.25
Caption	Roboto	Regular	12	Sentence	0.4
OVERLINE	Roboto	Regular	10	All caps	1.5

## 2.3 Components

### 2.3.1 AnchorLayout

New in version 1.0.0.

[AnchorLayout](#) class equivalent. Simplifies working with some widget properties. For example:

## AnchorLayout

```
AnchorLayout:
    canvas:
        Color:
            rgba: app.theme_cls.primary_color
    Rectangle:
        pos: self.pos
        size: self.size
```

## MDAnchorLayout

```
MDAnchorLayout:
    md_bg_color: app.theme_cls.primary_color
```

### API - kivymd.uix.anchorlayout

```
class kivymd.uix.anchorlayout.MDAnchorLayout(*args, **kwargs)
```

Anchor layout class. For more information, see in the [AnchorLayout](#) class documentation.

## 2.3.2 Widget

Widget class equivalent. Simplifies working with some widget properties. For example:

### Widget

```
Widget:
    size_hint: .5, None
    height: self.width

    canvas:
        Color:
            rgba: app.theme_cls.primary_color
    RoundedRectangle:
        pos: self.pos
        size: self.size
        radius: [self.height / 2,]
```

## MDWidget

```
MDWidget:  
    size_hint: .5, None  
    height: self.width  
    radius: self.height / 2  
    md_bg_color: app.theme_cls.primary_color
```

### API - kivymd.uix.widget

```
class kivymd.uix.widget.MDWidget(*args, **kwargs)
```

See Widget class documentation for more information.

New in version 1.0.0.

## 2.3.3 RecycleGridLayout

RecycleGridLayout class equivalent. Simplifies working with some widget properties. For example:

### RecycleGridLayout

```
RecycleGridLayout:  
    size_hint_y: None  
    height: self.minimum_height  
  
    canvas:  
        Color:  
            rgba: app.theme_cls.primary_color  
        Rectangle:  
            pos: self.pos  
            size: self.size
```

### MDRecycleGridLayout

```
MDRecycleGridLayout:  
    adaptive_height: True  
    md_bg_color: app.theme_cls.primary_color
```

**Available options are:**

- *adaptive\_height*
- *adaptive\_width*
- *adaptive\_size*

### **adaptive\_height**

```
adaptive_height: True
```

Equivalent

```
size_hint_y: None  
height: self.minimum_height
```

### **adaptive\_width**

```
adaptive_width: True
```

Equivalent

```
size_hint_x: None  
width: self.minimum_width
```

### **adaptive\_size**

```
adaptive_size: True
```

Equivalent

```
size_hint: None, None  
size: self.minimum_size
```

## **API - kivymd.uix.recyclegridlayout**

```
class kivymd.uix.recyclegridlayout.MDRecycleGridLayout(*args, **kwargs)
```

Recycle grid layout layout class. For more information, see in the [RecycleGridLayout](#) class documentation.

## 2.3.4 TapTargetView

See also:

[TapTargetView](#), GitHub

[TapTargetView](#), Material archive

Provide value and improve engagement by introducing users to new features and functionality at relevant moments.

### Usage

```
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.taptargetview import MDTapTargetView

KV = '''
Screen:

    MDFloatingActionButton:
        id: button
        icon: "plus"
        pos: 10, 10
        on_release: app.tap_target_start()
'''


class TapTargetViewDemo(MDApp):
    def build(self):
        screen = Builder.load_string(KV)
        self.tap_target_view = MDTapTargetView(
            widget=screen.ids.button,
            title_text="This is an add button",
            description_text="This is a description of the button",
            widget_position="left_bottom",
        )

        return screen


    def tap_target_start(self):
        if self.tap_target_view.state == "close":
            self.tap_target_view.start()
        else:
            self.tap_target_view.stop()

TapTargetViewDemo().run()
```


## Widget position

Sets the position of the widget relative to the floating circle.


```
self.tap_target_view = MDTapTargetView(  
    ...  
    widget_position="right",  
)
```

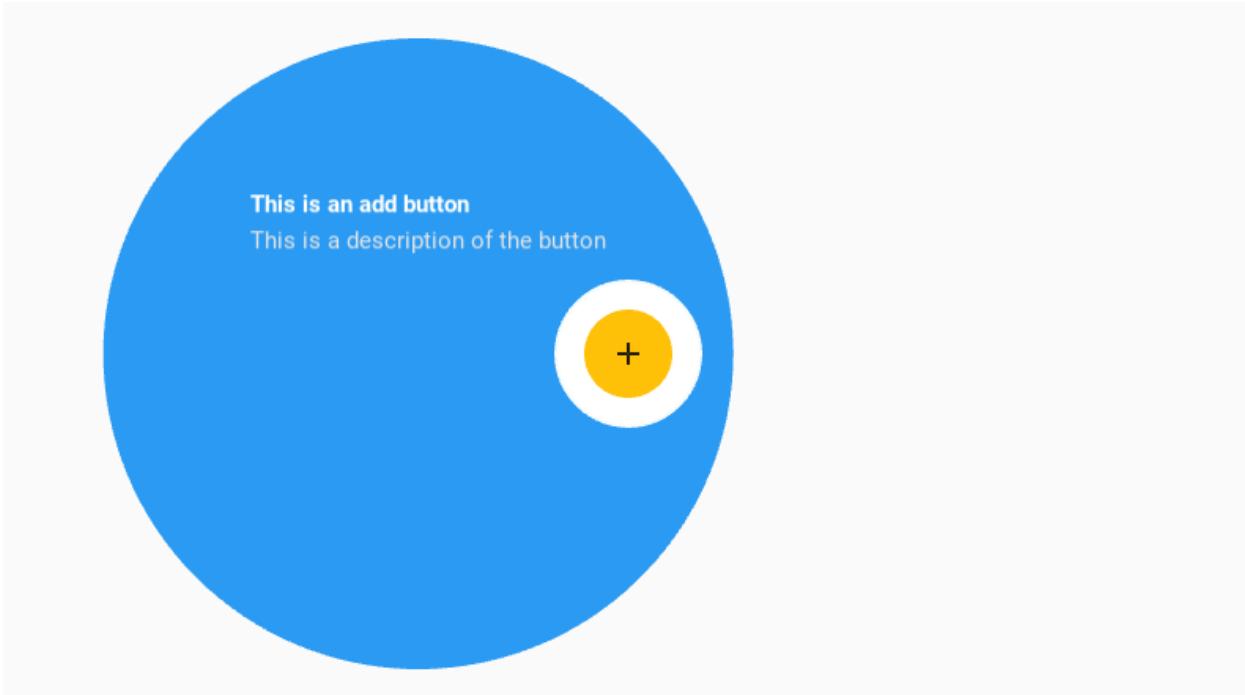

```
self.tap_target_view = MDTapTargetView(  
    ...  
    widget_position="left",  
)
```

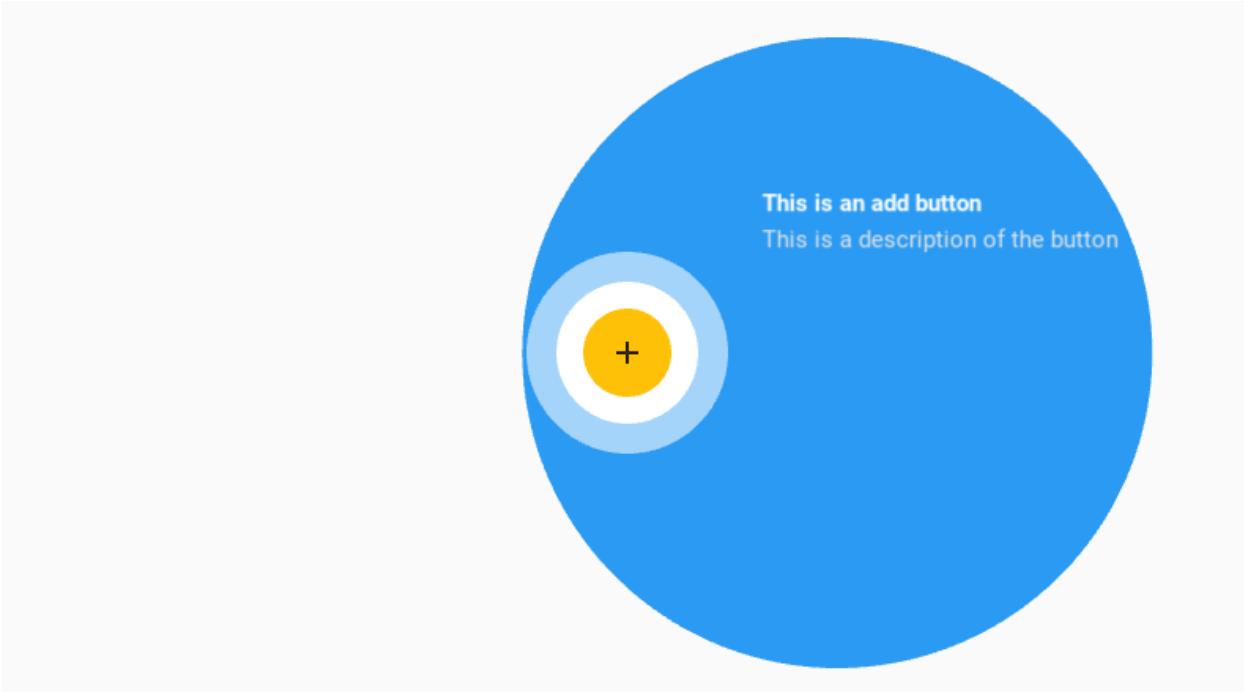

```
self.tap_target_view = MDTapTargetView(  
    ...  
    widget_position="top",  
)
```

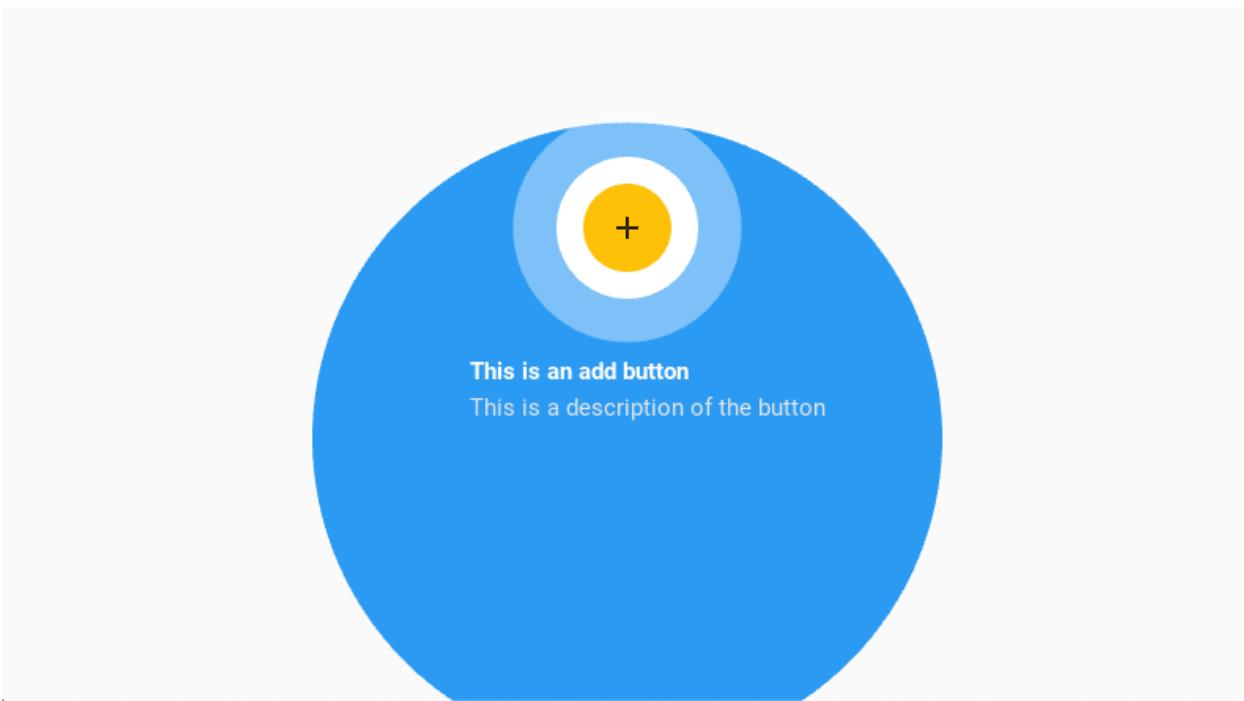


```
self.tap_target_view = MDTapTargetView(  
    ...  
    widget_position="bottom",
```


(continues on next page)

(continued from previous page)


)

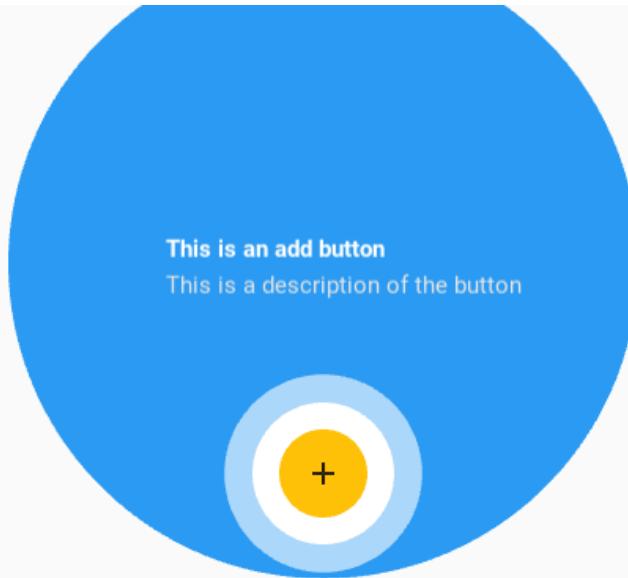


```
self.tap_target_view = MDTapTargetView(  
    ...  
    widget_position="left_top",  
)
```

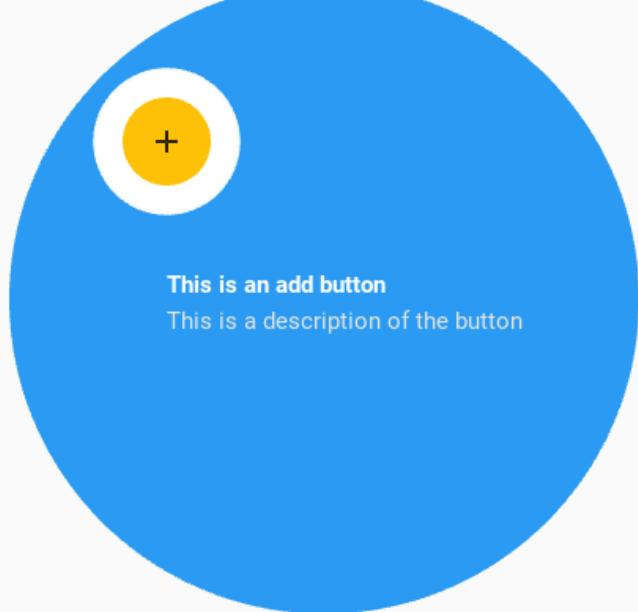


```
self.tap_target_view = MDTapTargetView(  
    ...  
    widget_position="right_top",  
)
```

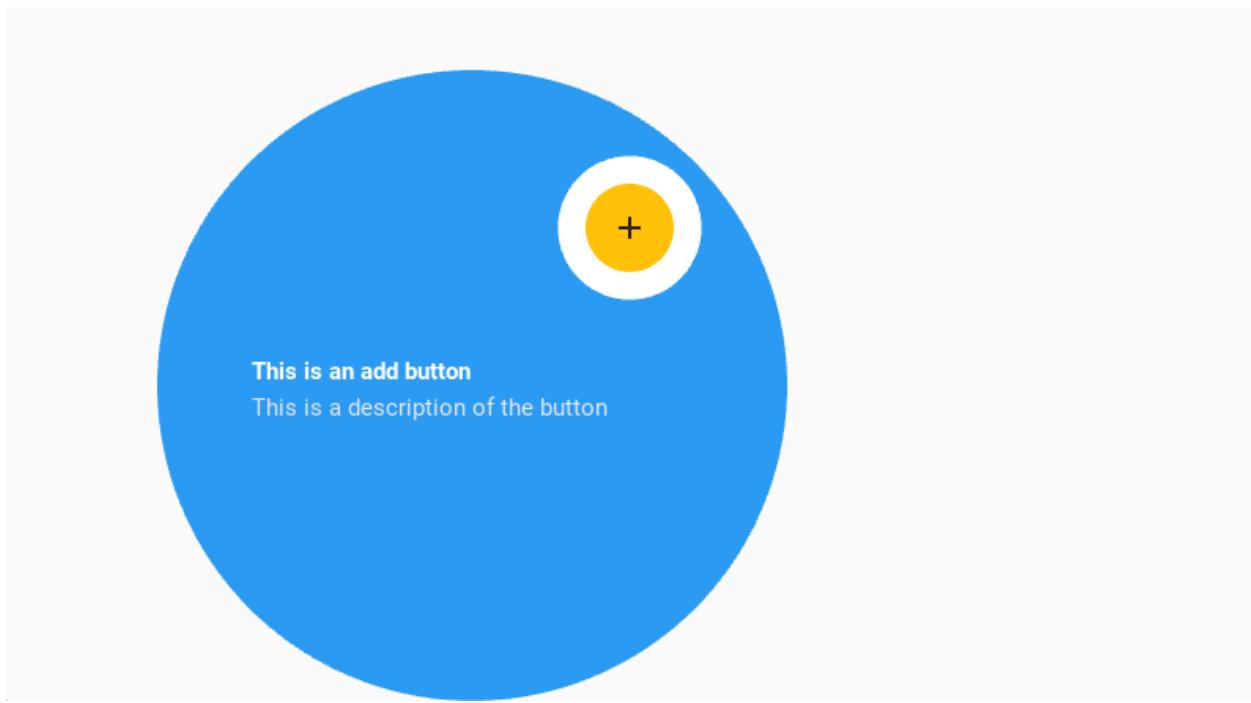

```
self.tap_target_view = MDTapTargetView(  
    ...  
    widget_position="left_bottom",  
)
```

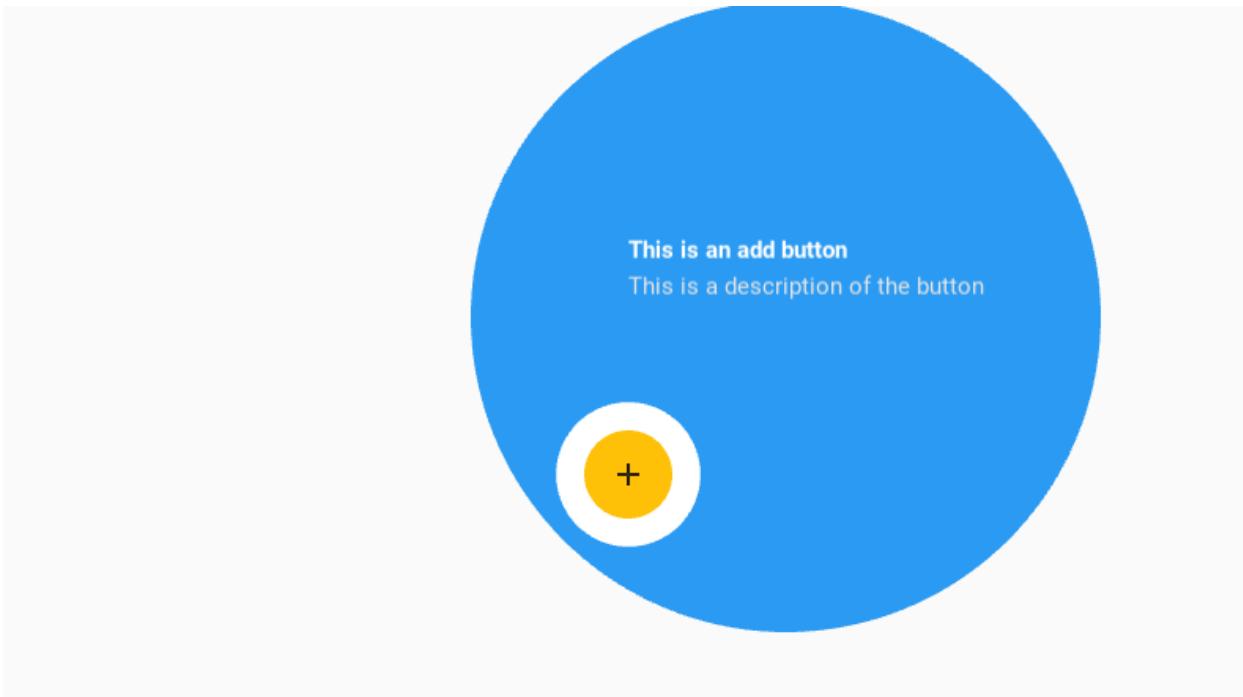

```
self.tap_target_view = MDTapTargetView(  
    ...  
    widget_position="right_bottom",  
)
```

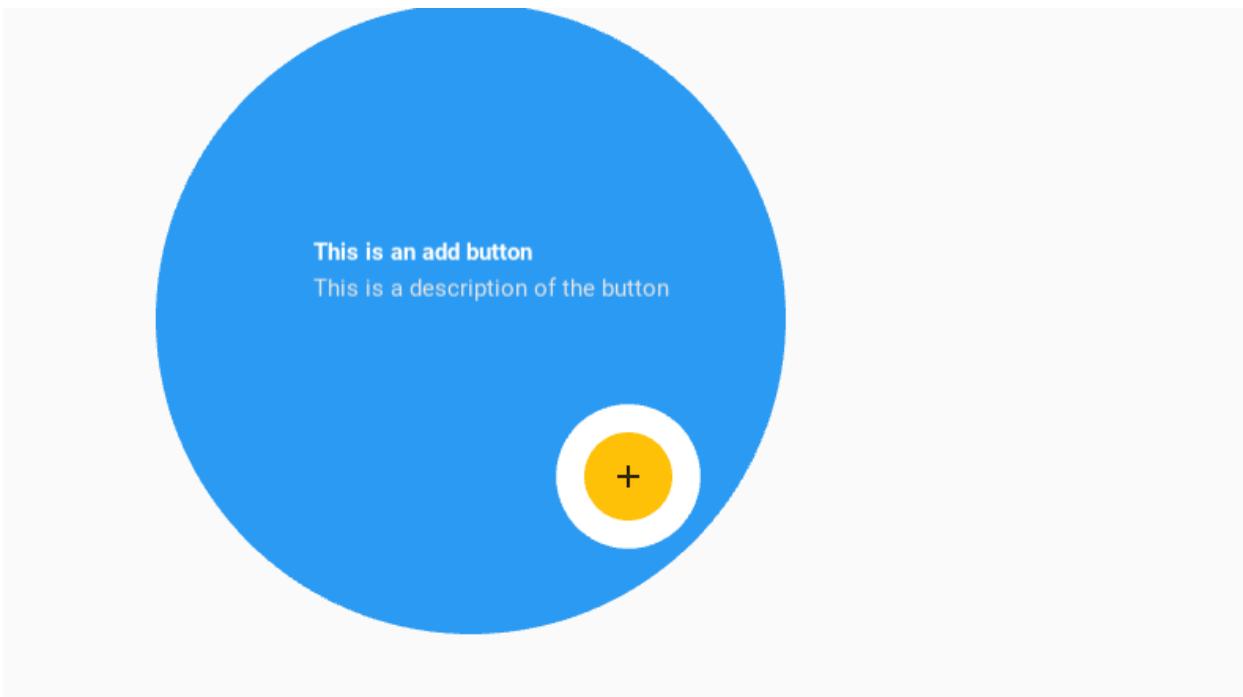

If you use the `widget_position = "center"` parameter then you must definitely specify the `title_position`.

```
self.tap_target_view = MDTapTargetView(
```

(continues on next page)


(continued from previous page)

```
...  
    widget_position="center",  
    title_position="left_top",  
)
```



### Text options

```
self.tap_target_view = MDTapTargetView(  
    ...  
    title_text="Title text",  
    description_text="Description text",  
)
```

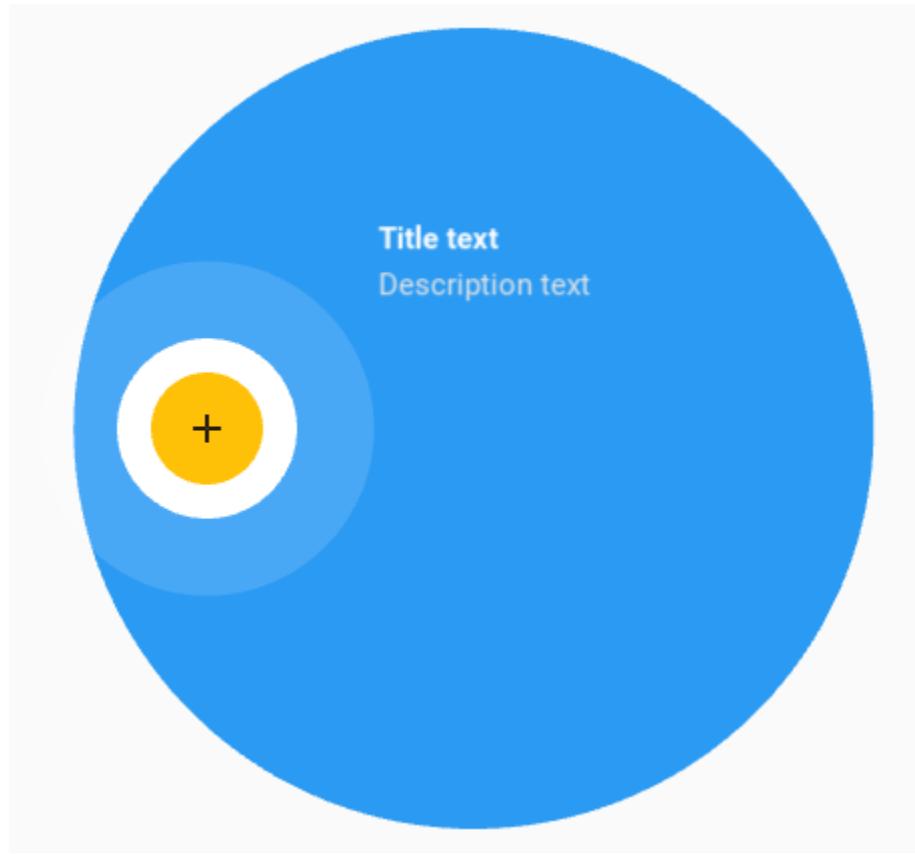

You can use the following options to control font size, color, and boldness:

- `title_text_size`
- `title_text_color`
- `title_text_bold`
- `description_text_size`
- `description_text_color`
- `description_text_bold`

```
self.tap_target_view = MDTapTargetView(  
    ...  
    title_text="Title text",  
    title_text_size="36sp",  
    description_text="Description text",  
    description_text_color=[1, 0, 0, 1]  
)
```



But you can also use markup to set these values.

```
self.tap_target_view = MDTapTargetView(  
    ...  
    title_text="[size=36]Title text[/size]",  
    description_text="[color=#ff0000ff]Description text[/color]",  
)
```

### Events control

```
self.tap_target_view.bind(on_open=self.on_open, on_close=self.on_close)
```

```
def on_open(self, instance_tap_target_view):  
    '''Called at the time of the start of the widget opening animation.'''  
  
    print("Open", instance_tap_target_view)  
  
def on_close(self, instance_tap_target_view):  
    '''Called at the time of the start of the widget closed animation.'''  
  
    print("Close", instance_tap_target_view)
```

---

**Note:** See other parameters in the *MDTapTargetView* class.

---

## API - kivymd.uix.taptargetview

```
class kivymd.uix.taptargetview.MDTapTargetView(**kwargs)
```

Rough try to mimic the working of Android's TapTargetView.

### Events

#### *on\_open*

Called at the time of the start of the widget opening animation.

#### *on\_close*

Called at the time of the start of the widget closed animation.


### **widget**

Widget to add TapTargetView upon.

*widget* is an `ObjectProperty` and defaults to `None`.

### **outer\_radius**

Radius for outer circle.

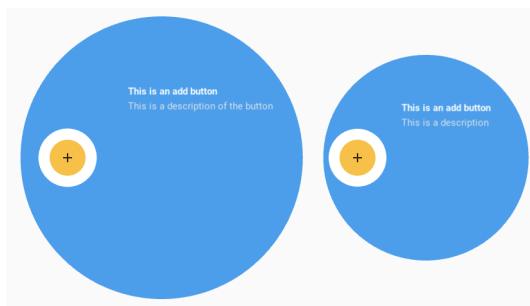

*outer\_radius* is an `NumericProperty` and defaults to `dp(200)`.

### **outer\_circle\_color**

Color for the outer circle in `rgb` format.

```
self.tap_target_view = MDTapTargetView(
    ...
    outer_circle_color=(1, 0, 0)
)
```



`outer_circle_color` is an `ListProperty` and defaults to `theme_cls.primary_color`.


**outer\_circle\_alpha**

Alpha value for outer circle.

`outer_circle_alpha` is an `NumericProperty` and defaults to `0.96`.

**target\_radius**

Radius for target circle.

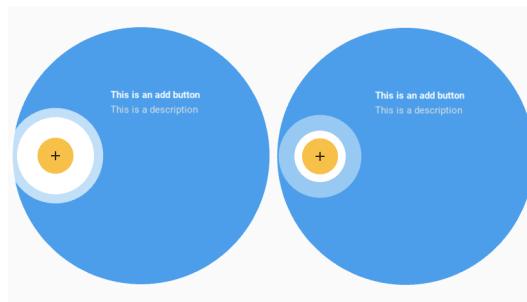


`target_radius` is an `NumericProperty` and defaults to `dp(45)`.

**target\_circle\_color**

Color for target circle in `rgb` format.

```
self.tap_target_view = MDTapTargetView(
    ...
    target_circle_color=(1, 0, 0)
)
```

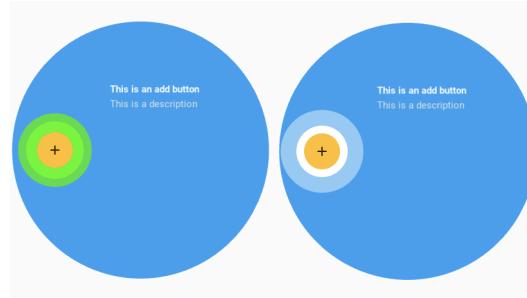

`target_circle_color` is an `ListProperty` and defaults to `[1, 1, 1]`.

#### `title_text`

Title to be shown on the view.

`title_text` is an `StringProperty` and defaults to ''.

#### `title_text_size`

Text size for title.

`title_text_size` is an `NumericProperty` and defaults to `dp(25)`.

#### `title_text_color`

Text color for title.

`title_text_color` is an `ListProperty` and defaults to `[1, 1, 1, 1]`.

#### `title_text_bold`

Whether title should be bold.

`title_text_bold` is an `BooleanProperty` and defaults to `True`.

#### `description_text`

Description to be shown below the title (keep it short).

`description_text` is an `StringProperty` and defaults to ''.

#### `description_text_size`

Text size for description text.

`description_text_size` is an `NumericProperty` and defaults to `dp(20)`.

#### `description_text_color`

Text color for description text.

`description_text_color` is an `ListProperty` and defaults to `[0.9, 0.9, 0.9, 1]`.

#### `description_text_bold`

Whether description should be bold.

`description_text_bold` is an `BooleanProperty` and defaults to `False`.

### **draw\_shadow**

Whether to show shadow.

`draw_shadow` is an `BooleanProperty` and defaults to `False`.

### **cancelable**

Whether clicking outside the outer circle dismisses the view.

`cancelable` is an `BooleanProperty` and defaults to `False`.

### **widget\_position**

Sets the position of the widget on the `outer_circle`. Available options are `'left'`, `'right'`, `'top'`, `'bottom'`, `'left_top'`, `'right_top'`, `'left_bottom'`, `'right_bottom'`, `'center'`.

`widget_position` is an `OptionProperty` and defaults to `'left'`.

### **title\_position**

Sets the position of `:attr`~title_text`` on the outer circle. Only works if `:attr`~widget_position`` is set to `'center'`. In all other cases, it calculates the `:attr`~title_position`` itself. Must be set to other than `'auto'` when `:attr`~widget_position`` is set to `'center'`.

Available options are `'auto'`, `'left'`, `'right'`, `'top'`, `'bottom'`, `'left_top'`, `'right_top'`, `'left_bottom'`, `'right_bottom'`, `'center'`.

`title_position` is an `OptionProperty` and defaults to `'auto'`.

### **stop\_on\_outer\_touch**

Whether clicking on outer circle stops the animation.

`stop_on_outer_touch` is an `BooleanProperty` and defaults to `False`.

### **stop\_on\_target\_touch**

Whether clicking on target circle should stop the animation.

`stop_on_target_touch` is an `BooleanProperty` and defaults to `True`.

### **state**

State of `MDTapTargetView`.

`state` is an `OptionProperty` and defaults to `'close'`.

### **start(self, \*args)**

Starts widget opening animation.

### **stop(self, \*args)**

Starts widget close animation.

### **on\_open(self, \*args)**

Called at the time of the start of the widget opening animation.

### **on\_close(self, \*args)**

Called at the time of the start of the widget closed animation.

### **on\_draw\_shadow(self, instance, value)**

### **on\_description\_text(self, instance, value)**

### **on\_description\_text\_size(self, instance, value)**

### **on\_description\_text\_bold(self, instance, value)**

---

```
on_title_text(self, instance, value)
on_title_text_size(self, instance, value)
on_title_text_bold(self, instance, value)
on_outer_radius(self, instance, value)
on_target_radius(self, instance, value)
on_target_touch(self)
on_outer_touch(self)
on_outside_click(self)
```

### 2.3.5 ScrollView

New in version 1.0.0.

`ScrollView` class equivalent. Simplifies working with some widget properties. For example:

#### ScrollView

```
ScrollView:
    canvas:
        Color:
            rgba: app.theme_cls.primary_color
        Rectangle:
            pos: self.pos
            size: self.size
```

#### MDScrollView

```
MDScrollView:
    md_bg_color: app.theme_cls.primary_color
```

#### API - kivymd.uix.scrollview

```
class kivymd.uix.scrollview.MDScrollView(*args, **kwargs)
```

`ScrollView` class. For more information, see in the `ScrollView` class documentation.

## 2.3.6 ResponsiveLayout

New in version 1.0.0.

**Responsive design is a graphic user interface (GUI) design approach used to create content that adjusts smoothly to various screen sizes.**

The `MDResponsiveLayout` class does not reorganize your UI. Its task is to track the size of the application screen and, depending on this size, the `MDResponsiveLayout` class selects which UI layout should be displayed at the moment: mobile, tablet or desktop. Therefore, if you want to have a responsive view some kind of layout in your application, you should have three KV files with UI markup for three platforms.

You need to set three parameters for the `MDResponsiveLayout` class `mobile_view`, `tablet_view` and `desktop_view`. These should be Kivy or KivyMD widgets.

### Usage responsive

```
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.label import MDLabel
from kivymd.uix.responsivelayout import MDResponsiveLayout
from kivymd.uix.screen import MDScreen

KV = '''
<CommonComponentLabel>
    halign: "center"

<MobileView>
    CommonComponentLabel:
        text: "Mobile"

<TabletView>
    CommonComponentLabel:
        text: "Table"

<DesktopView>
    CommonComponentLabel:
        text: "Desktop"

ResponsiveView:
'''


class CommonComponentLabel(MDLabel):
    pass
```

(continues on next page)

(continued from previous page)

```

class MobileView(MDScreen):
    pass

class TabletView(MDScreen):
    pass

class DesktopView(MDScreen):
    pass

class ResponsiveView(MDResponsiveLayout, MDScreen):
    def __init__(self, **kw):
        super().__init__(**kw)
        self.mobile_view = MobileView()
        self.tablet_view = TabletView()
        self.desktop_view = DesktopView()

class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

Test().run()

```

---

**Note:** Use common components for platform layouts (mobile, tablet, desktop views). As shown in the example above, such a common component is the *CommonComponentLabel* widget.

---

Perhaps you expected more from the *MDResponsiveLayout* widget, but even *Flutter* uses a similar approach to creating a responsive UI.

You can also use the [commands](#) provided to you by the developer tools to create a project with an responsive design.

### API - kivymd.uix.responsivelayout

```
class kivymd.uix.responsivelayout.MDResponsiveLayout(*args, **kwargs)
```

#### Events

##### [\*on\\_change\\_screen\\_type\*](#)

Called when the screen type changes.

##### **mobile\_view**

Mobile view. Must be a Kivy or KivyMD widget.

*mobile\_view* is an [\*ObjectProperty\*](#) and defaults to *None*.

**tablet\_view**

Tablet view. Must be a Kivy or KivyMD widget.

`tablet_view` is an `ObjectProperty` and defaults to `None`.

**desktop\_view**

Desktop view. Must be a Kivy or KivyMD widget.

`desktop_view` is an `ObjectProperty` and defaults to `None`.

**on\_change\_screen\_type(self, \*args)**

Called when the screen type changes.

**on\_size(self, \*args)**

Called when the application screen size changes.

**set\_screen(self)**

Sets the screen according to the type of application screen size: mobile/tablet or desktop view.

### 2.3.7 CircularLayout

CircularLayout is a special layout that places widgets around a circle.

#### MDCircularLayout

##### Usage

```
from kivy.lang.builder import Builder
from kivy.uix.label import Label

from kivymd.app import MDApp

kv = '''
MDScreen:

    MDCircularLayout:
        id: container
        pos_hint: {"center_x": .5, "center_y": .5}
        row_spacing: min(self.size) * 0.1
'''



class Main(MDApp):
    def build(self):
        return Builder.load_string(kv)

    def on_start(self):
        for x in range(1, 49):
            self.root.ids.container.add_widget(
                Label(text=f'{x}', color=[0, 0, 0, 1])
)
```

(continues on next page)

(continued from previous page)

```
Main().run()
```

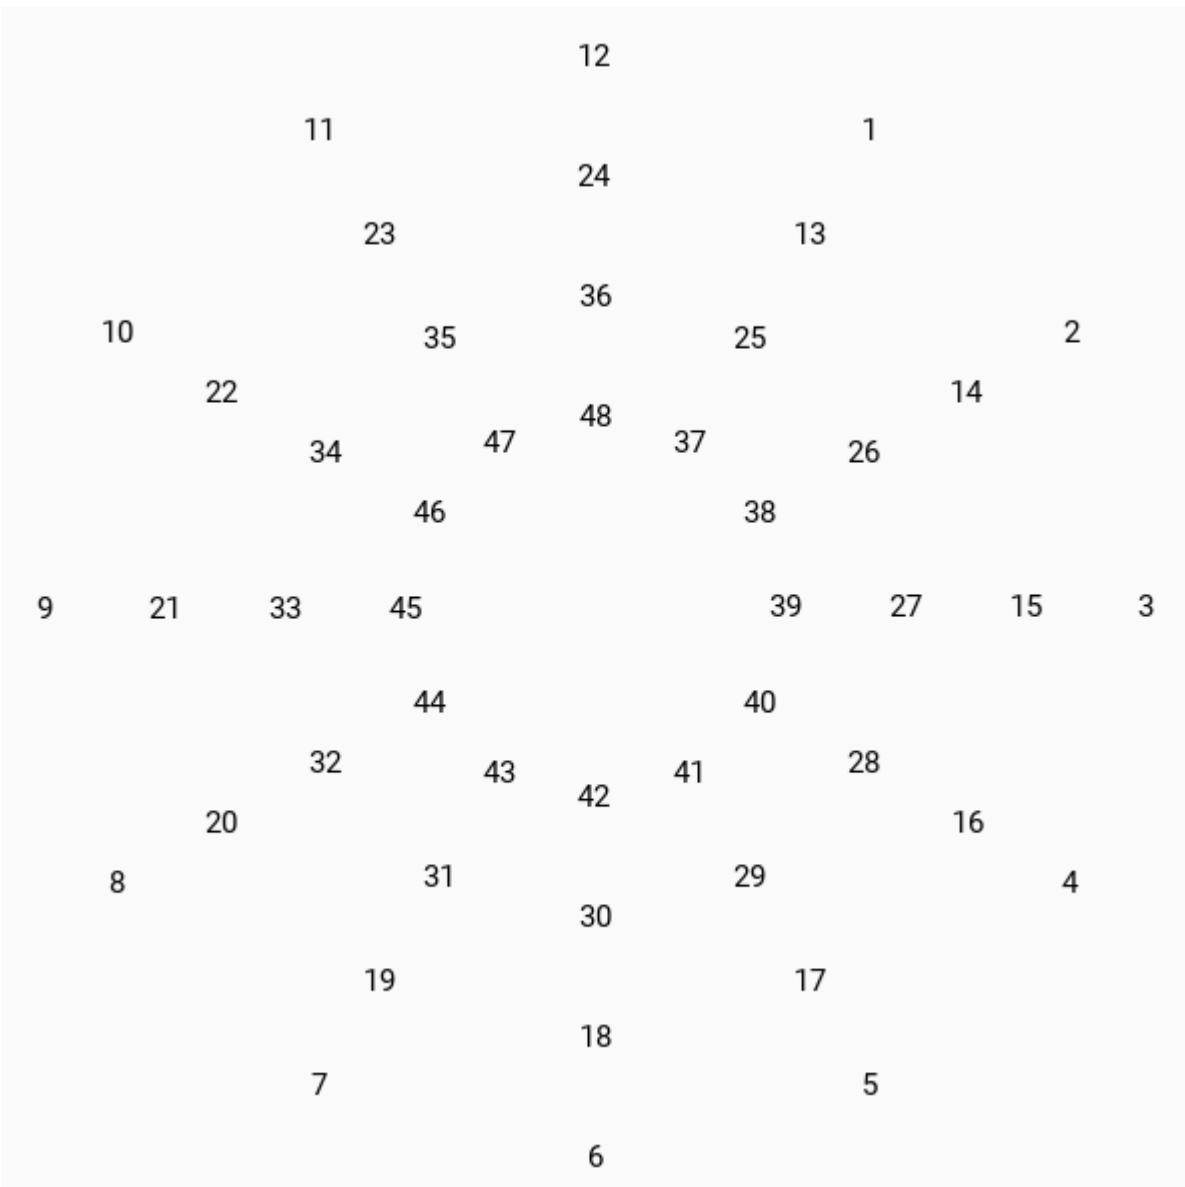

**API - kivymd.uix.circularlayout****class kivymd.uix.circularlayout.MDCircularLayout(\*\*kwargs)**Float layout class. For more information, see in the [FloatLayout](#) class documentation.**degree\_spacing**

The space between children in degree.

*degree\_spacing* is an [NumericProperty](#) and defaults to *30*.**circular\_radius**Radius of circle. Radius will be the greatest value in the layout if *circular\_radius* if not specified.*circular\_radius* is an [NumericProperty](#) and defaults to *None*.**start\_from**

The positon of first child in degree.

*start\_from* is an [NumericProperty](#) and defaults to *60*.**max\_degree**

Maximum range in degree allowed for each row of widgets before jumping to the next row.

*max\_degree* is an [NumericProperty](#) and defaults to *360*.**circular\_padding**

Padding between outer widgets and the edge of the biggest circle.

*circular\_padding* is an [NumericProperty](#) and defaults to *25dp*.**row\_spacing**

Space between each row of widget.

*row\_spacing* is an [NumericProperty](#) and defaults to *50dp*.**clockwise**

Direction of widgets in circular direction.

*clockwise* is an [BooleanProperty](#) and defaults to *True*.**get\_angle(self, pos: tuple)**

Returns the angle of given pos.

**remove\_widget(self, widget, \*\*kwargs)**

Remove a widget from the children of this widget.

**Parameters****widget: Widget**

Widget to remove from our children list.

```
>>> from kivy.uix.button import Button
>>> root = Widget()
>>> button = Button()
>>> root.add_widget(button)
>>> root.remove_widget(button)
```

```
do_layout(self, *args, **kwargs)
```

This function is called when a layout is called by a trigger. If you are writing a new Layout subclass, don't call this function directly but use `_trigger_layout()` instead.

The function is by default called *before* the next frame, therefore the layout isn't updated immediately. Anything depending on the positions of e.g. children should be scheduled for the next frame.

New in version 1.0.8.

### 2.3.8 Screen

Screen class equivalent. Simplifies working with some widget properties. For example:

#### Screen

```
Screen:
  canvas:
    Color:
      rgba: app.theme_cls.primary_color
    RoundedRectangle:
      pos: self.pos
      size: self.size
      radius: [25, 0, 0, 0]
```

#### MDScreen

```
MDScreen:
  radius: [25, 0, 0, 0]
  md_bg_color: app.theme_cls.primary_color
```

#### API - kivymd.uix.screen

```
class kivymd.uix.screen.MDScreen(*args, **kwargs)
```

Screen is an element intended to be used with a `MDScreenManager`. For more information, see in the Screen class documentation.

##### hero\_to

Must be a `MDHeroTo` class.

See the documentation of the `MDHeroTo` widget for more detailed information.

Deprecated since version 1.0.0: Use attr:`heroes_to` attribute instead.

`hero_to` is an `ObjectProperty` and defaults to `None`.

##### heroes\_to

Must be a list of `MDHeroTo` class.

New in version 1.0.0.

`heroes_to` is an `ListProperty` and defaults to `[]`.

`on_hero_to(self, screen, widget: MDHeroTo)`

Called when the value of the `hero_to` attribute changes.

## 2.3.9 ScreenManager

New in version 1.0.0.

`ScreenManager` class equivalent. If you want to use Hero animations you need to use `MDScreenManager` not `ScreenManager` class.

### Transition

`MDScreenManager` class supports the following transitions:

- `MDFadeSlideTransition`
- `MDSlideTransition`
- `MDSwapTransition`

You need to use the `MDScreenManager` class when you want to use hero animations on your screens. If you don't need hero animation use the `ScreenManager` class.

### API - kivymd.uix.screenmanager

`class kivymd.uix.screenmanager.MDScreenManager(*args, **kwargs)`

Screen manager. This is the main class that will control your `MDScreen` stack and memory.

For more information, see in the `ScreenManager` class documentation.

#### `current_hero`

The name of the current tag for the `MDHeroFrom` and `MDHeroTo` objects that will be animated when animating the transition between screens.

Deprecated since version 1.1.0: Use `current_heroes` attribute instead.

See the `Hero` module documentation for more information about creating and using Hero animations.

`current_hero` is an `StringProperty` and defaults to `None`.

#### `current_heroes`

A list of names (tags) of heroes that need to be animated when moving to the next screen.

New in version 1.1.0.

`current_heroes` is an `ListProperty` and defaults to `[]`.

#### `check_transition(self, *args)`

Sets the default type transition.

#### `get_hero_from_widget(self)`

Get a list of `MDHeroFrom` objects according to the tag names specified in the `current_heroes` list.

#### `on_current_hero(self, instance, value: str)`

Called when the value of the `current_hero` attribute changes.

---

**add\_widget(self, widget, \*args, \*\*kwargs)**

Changed in version 2.1.0.

Renamed argument *screen* to *widget*.

### 2.3.10 BoxLayout

BoxLayout class equivalent. Simplifies working with some widget properties. For example:

#### BoxLayout

```
BoxLayout:
    size_hint_y: None
    height: self.minimum_height

    canvas:
        Color:
            rgba: app.theme_cls.primary_color
        Rectangle:
            pos: self.pos
            size: self.size
```

#### MDBBoxLayout

```
MDBBoxLayout:
    adaptive_height: True
    md_bg_color: app.theme_cls.primary_color
```

Available options are:

- *adaptive\_height*
- *adaptive\_width*
- *adaptive\_size*

#### adaptive\_height

```
adaptive_height: True
```

Equivalent

```
size_hint_y: None
height: self.minimum_height
```

### adaptive\_width

```
adaptive_width: True
```

Equivalent

```
size_hint_x: None  
height: self.minimum_width
```

### adaptive\_size

```
adaptive_size: True
```

Equivalent

```
size_hint: None, None  
size: self.minimum_size
```

## API - kivymd.uix.boxlayout

```
class kivymd.uix.boxlayout.MDBoxLayout(*args, **kwargs)
```

Box layout class.

For more information, see in the [BoxLayout](#) class documentation.

### 2.3.11 RecycleView

New in version 1.0.0.

RecycleView class equivalent. Simplifies working with some widget properties. For example:

#### RecycleView

##### RecycleView:

```
canvas:  
    Color:  
        rgba: app.theme_cls.primary_color  
    Rectangle:  
        pos: self.pos  
        size: self.size
```

## MDRecycleView

```
MDRecycleView:
    md_bg_color: app.theme_cls.primary_color
```

### API - kivymd.uix.recycleview

```
class kivymd.uix.recycleview.MDRecycleView(*args, **kwargs)
```

Recycle view class. For more information, see in the [RecycleView](#) class documentation.

## 2.3.12 StackLayout

StackLayout class equivalent. Simplifies working with some widget properties. For example:

### StackLayout

```
StackLayout:
    size_hint_y: None
    height: self.minimum_height

    canvas:
        Color:
            rgba: app.theme_cls.primary_color
        Rectangle:
            pos: self.pos
            size: self.size
```

### MDStackLayout

```
MDStackLayout:
    adaptive_height: True
    md_bg_color: app.theme_cls.primary_color
```

Available options are:

- *adaptive\_height*
- *adaptive\_width*
- *adaptive\_size*

### adaptive\_height

```
adaptive_height: True
```

Equivalent

```
size_hint_y: None  
height: self.minimum_height
```

### adaptive\_width

```
adaptive_width: True
```

Equivalent

```
size_hint_x: None  
width: self.minimum_width
```

### adaptive\_size

```
adaptive_size: True
```

Equivalent

```
size_hint: None, None  
size: self.minimum_size
```

## API - kivymd.uix.stacklayout

```
class kivymd.uix.stacklayout.MDStackLayout(*args, **kwargs)
```

Stack layout class. For more information, see in the [StackLayout](#) class documentation.

### 2.3.13 RelativeLayout

[RelativeLayout](#) class equivalent. Simplifies working with some widget properties. For example:

#### RelativeLayout

```
RelativeLayout:  
    canvas:  
        Color:  
            rgba: app.theme_cls.primary_color  
        RoundedRectangle:  
            pos: (0, 0)
```

(continues on next page)

(continued from previous page)

```
size: self.size
radius: [25, ]
```

## MDRelativeLayout

```
MDRelativeLayout:
    radius: [25, ]
    md_bg_color: app.theme_cls.primary_color
```

### API - kivymd.uix.relativelayout

**class kivymd.uix.relativelayout.MDRelativeLayout(\*args, \*\*kwargs)**

Relative layout class. For more information, see in the [RelativeLayout](#) class documentation.

## 2.3.14 Hero


New in version 1.0.0.

### Use the [MDHeroFrom](#) widget to animate a widget from one screen to the next.

- The hero refers to the widget that flies between screens.
- Create a hero animation using KivyMD's [MDHeroFrom](#) widget.
- Fly the hero from one screen to another.
- Animate the transformation of a hero's shape from circular to rectangular while flying it from one screen to another.
- The [MDHeroFrom](#) widget in KivyMD implements a style of animation commonly known as shared element transitions or shared element animations.

The widget that will move from screen A to screen B will be a hero. To move a widget from one screen to another using hero animation, you need to do the following:

- On screen **A**, place the [MDHeroFrom](#) container.
- Sets a tag (string) for the [MDHeroFrom](#) container.
- Place a hero in the [MDHeroFrom](#) container.
- On screen **B**, place the [MDHeroTo](#) container - our hero from screen **A** will fly into this container.

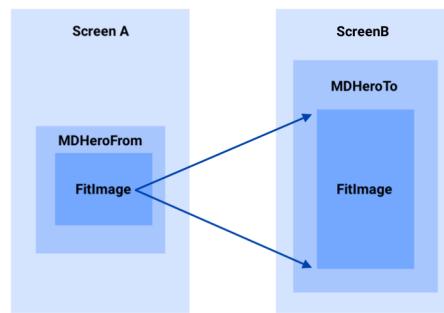

**Warning:** `MDHeroFrom` container cannot have more than one child widget.

### Base example

```
from kivy.lang import Builder

from kivymd.app import MDApp

KV = '''
MDScreenManager:

    MDScreen:
        name: "screen A"
        md_bg_color: "lightblue"

        MDHeroFrom:
            id: hero_from
            tag: "hero"
            size_hint: None, None
            size: "120dp", "120dp"
            pos_hint: {"top": .98}
            x: 24

            FitImage:
                source: "kivymd/images/logo/kivymd-icon-512.png"
                size_hint: None, None
                size: hero_from.size

        MDRaisedButton:
            text: "Move Hero To Screen B"
            pos_hint: {"center_x": .5}
            y: "36dp"
            on_release:
                root.current_heroes = ["hero"]
                root.current = "screen B"

    MDScreen:
```

(continues on next page)

(continued from previous page)

```

name: "screen B"
hero_to: hero_to
md_bg_color: "cadetblue"

MDHeroTo:
    id: hero_to
    tag: "hero"
    size_hint: None, None
    size: "220dp", "220dp"
    pos_hint: {"center_x": .5, "center_y": .5}

MDRaisedButton:
    text: "Move Hero To Screen A"
    pos_hint: {"center_x": .5}
    y: "36dp"
    on_release:
        root.current_heroes = ["hero"]
        root.current = "screen A"
    ...

class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

Test().run()

```

Note that the child of the `MDHeroFrom` widget must have the size of the parent:

```

MDHeroFrom:
    id: hero_from
    tag: "hero"

    FitImage:
        size_hint: None, None
        size: hero_from.size

```

To enable hero animation before setting the name of the current screen for the screen manager, you must specify the name of the tag of the `MDHeroFrom` container in which the hero is located:

```

MDRaisedButton:
    text: "Move Hero To Screen B"
    on_release:
        root.current_heroes = ["hero"]
        root.current = "screen 2"

```

If you need to switch to a screen that does not contain heroes, set the `current_hero` attribute for the screen manager as `""` (empty string):

```
MDRaisedButton:  
    text: "Go To Another Screen"  
    on_release:  
        root.current_heroes = []  
        root.current = "another screen"
```

### Example

```
from kivy.lang import Builder  
  
from kivymd.app import MDApp  
  
KV = ''''  
MDScreenManager:  
  
    MDScreen:  
        name: "screen A"  
        md_bg_color: "lightblue"  
  
        MDHeroFrom:  
            id: hero_from  
            tag: "hero"  
            size_hint: None, None  
            size: "120dp", "120dp"  
            pos_hint: {"top": .98}  
            x: 24  
  
            FitImage:  
                source: "kivymd/images/logo/kivymd-icon-512.png"  
                size_hint: None, None  
                size: hero_from.size  
  
        MDRaisedButton:  
            text: "Move Hero To Screen B"  
            pos_hint: {"center_x": .5}  
            y: "36dp"  
            on_release:  
                root.current_heroes = ["hero"]  
                root.current = "screen B"  
  
    MDScreen:  
        name: "screen B"  
        hero_to: hero_to  
        md_bg_color: "cadetblue"  
  
        MDHeroTo:  
            id: hero_to  
            tag: "hero"  
            size_hint: None, None  
            size: "220dp", "220dp"  
            pos_hint: {"center_x": .5, "center_y": .5}
```

(continues on next page)

(continued from previous page)

```

MDRaisedButton:
    text: "Go To Screen C"
    pos_hint: {"center_x": .5}
    y: "52dp"
    on_release:
        root.current_heroes = []
        root.current = "screen C"

MDRaisedButton:
    text: "Move Hero To Screen A"
    pos_hint: {"center_x": .5}
    y: "8dp"
    on_release:
        root.current_heroes = ["hero"]
        root.current = "screen A"

MDScreen:
    name: "screen C"

    MDLabel:
        text: "Screen C"
        halign: "center"

    MDRaisedButton:
        text: "Back To Screen B"
        pos_hint: {"center_x": .5}
        y: "36dp"
        on_release:
            root.current = "screen B"
    ...

class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

Test().run()

```

## Events

Two events are available for the hero:

- *on\_transform\_in* - when the hero flies from screen **A** to screen **B**.
- *on\_transform\_out* - when the hero back from screen **B** to screen **A**.

The *on\_transform\_in*, *on\_transform\_out* events relate to the *MDHeroFrom* container. For example, let's change the radius and background color of the hero during the flight between the screens:

```
from kivy import utils
from kivy.animation import Animation
from kivy.lang import Builder
from kivy.utils import get_color_from_hex

from kivymd.app import MDApp
from kivymd.uix.hero import MDHeroFrom
from kivymd.uix.relativelayout import MDRelativeLayout

KV = """
MDScreenManager:

    MDScreen:
        name: "screen A"
        md_bg_color: "lightblue"

        MyHero:
            id: hero_from
            tag: "hero"
            size_hint: None, None
            size: "120dp", "120dp"
            pos_hint: {"top": .98}
            x: 24

            MDRelativeLayout:
                size_hint: None, None
                size: hero_from.size
                md_bg_color: "blue"
                radius: [24, 12, 24, 12]

                FitImage:
                    source: "https://github.com/kivymd/internal/raw/main/logo/kivymd_"
                    logo_blue.png"

        MDRaisedButton:
            text: "Move Hero To Screen B"
            pos_hint: {"center_x": .5}
            y: "36dp"
            on_release:
                root.current_heroes = ["hero"]
                root.current = "screen B"

    MDScreen:
        name: "screen B"
        hero_to: hero_to
        md_bg_color: "cadetblue"

        MDHeroTo:
            id: hero_to
            tag: "hero"
            size_hint: None, None
            size: "220dp", "220dp"
```

(continues on next page)

(continued from previous page)

```

pos_hint: {"center_x": .5, "center_y": .5}

MDRaisedButton:
    text: "Move Hero To Screen A"
    pos_hint: {"center_x": .5}
    y: "36dp"
    on_release:
        root.current_heroes = ["hero"]
        root.current = "screen A"
    ...

class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

class MyHero(MDHeroFrom):
    def on_transform_in(
        self, instance_hero_widget: MDRelativeLayout, duration: float
    ):
        ...
        Called when the hero flies from screen **A** to screen **B**.

        :param instance_hero_widget: dhild widget of the `MDHeroFrom` class.
        :param duration of the transition animation between screens.
        ...

        Animation(
            radius=[12, 24, 12, 24],
            duration=duration,
            md_bg_color=(0, 1, 1, 1),
        ).start(instance_hero_widget)

    def on_transform_out(
        self, instance_hero_widget: MDRelativeLayout, duration: float
    ):
        '''Called when the hero back from screen **B** to screen **A**.'''

        Animation(
            radius=[24, 12, 24, 12],
            duration=duration,
            md_bg_color=get_color_from_hex(utils.hex_colormap["blue"]),
        ).start(instance_hero_widget)

Test().run()

```

## Usage with ScrollView

```
from kivy.animation import Animation
from kivy.clock import Clock
from kivy.lang import Builder
from kivy.properties import StringProperty, ObjectProperty

from kivymd.app import MDApp
from kivymd.uix.hero import MDHeroFrom

KV = '''
<HeroItem>
    size_hint_y: None
    height: "200dp"
    radius: 24

    MDSmartTile:
        id: tile
        radius: 24
        box_radius: 0, 0, 24, 24
        box_color: 0, 0, 0, .5
        source: "kivymd/images/logo/kivymd-icon-512.png"
        size_hint: None, None
        size: root.size
        mipmap: True
        on_release: root.on_release()

        MDLabel:
            text: root.tag
            bold: True
            font_style: "H6"
            opposite_colors: True

MDScreenManager:

    MDScreen:
        name: "screen A"

        ScrollView:

            MDGridLayout:
                id: box
                cols: 2
                spacing: "12dp"
                padding: "12dp"
                adaptive_height: True

    MDScreen:
        name: "screen B"
        heroes_to: [hero_to]
```

(continues on next page)

(continued from previous page)

```

MDHeroTo:
    id: hero_to
    size_hint: 1, None
    height: "220dp"
    pos_hint: {"top": 1}

MDRaisedButton:
    text: "Move Hero To Screen A"
    pos_hint: {"center_x": .5}
    y: "36dp"
    on_release:
        root.current_heroes = [hero_to.tag]
        root.current = "screen A"
    ...

class HeroItem(MDHeroFrom):
    text = StringProperty()
    manager = ObjectProperty()

    def __init__(self, **kwargs):
        super().__init__(**kwargs)
        self.ids.tile.ids.image.ripple_duration_in_fast = 0.05

    def on_transform_in(self, instance_hero_widget, duration):
        Animation(
            radius=[0, 0, 0, 0],
            box_radius=[0, 0, 0, 0],
            duration=duration,
        ).start(instance_hero_widget)

    def on_transform_out(self, instance_hero_widget, duration):
        Animation(
            radius=[24, 24, 24, 24],
            box_radius=[0, 0, 24, 24],
            duration=duration,
        ).start(instance_hero_widget)

    def on_release(self):
        def switch_screen(*args):
            self.manager.current_heroes = [self.tag]
            self.manager.ids.hero_to.tag = self.tag
            self.manager.current = "screen B"

        Clock.schedule_once(switch_screen, 0.2)

class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

    def on_start(self):

```

(continues on next page)

(continued from previous page)

```
for i in range(12):
    hero_item = HeroItem(
        text=f"Item {i + 1}", tag=f"Tag {i}", manager=self.root
    )
    if not i % 2:
        hero_item.md_bg_color = "lightgrey"
    self.root.ids.box.add_widget(hero_item)
```

Test().run()

## Using multiple heroes at the same time

```
from kivy.lang import Builder

from kivymd.app import MDApp

KV = '''
MDScreenManager:

    MDScreen:
        name: "screen A"
        md_bg_color: "lightblue"

        MDHeroFrom:
            id: hero_kivymd
            tag: "kivymd"
            size_hint: None, None
            size: "200dp", "200dp"
            pos_hint: {"top": .98}
            x: 24

            FitImage:
                source: "kivymd/images/logo/kivymd-icon-512.png"
                size_hint: None, None
                size: hero_kivymd.size

        MDHeroFrom:
            id: hero_kivy
            tag: "kivy"
            size_hint: None, None
            size: "200dp", "200dp"
            pos_hint: {"top": .98}
            x: 324

            FitImage:
                source: "data/logo/kivy-icon-512.png"
                size_hint: None, None
                size: hero_kivy.size
```

(continues on next page)

(continued from previous page)

```
MDRaisedButton:
    text: "Move Hero To Screen B"
    pos_hint: {"center_x": .5}
    y: "36dp"
    on_release:
        root.current_heroes = ["kivymd", "kivy"]
        root.current = "screen B"

MDScreen:
    name: "screen B"
    heroes_to: hero_to_kivymd, hero_to_kivy
    md_bg_color: "cadetblue"

MDHeroTo:
    id: hero_to_kivy
    tag: "kivy"
    size_hint: None, None
    pos_hint: {"center_x": .5, "center_y": .5}

MDHeroTo:
    id: hero_to_kivymd
    tag: "kivymd"
    size_hint: None, None
    pos_hint: {"right": 1, "top": 1}

MDRaisedButton:
    text: "Move Hero To Screen A"
    pos_hint: {"center_x": .5}
    y: "36dp"
    on_release:
        root.current_heroes = ["kivy", "kivymd"]
        root.current = "screen A"
    ...

class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

Test().run()
```

## API - kivymd.uix.hero

**class** `kivymd.uix.hero.MDHeroFrom(**kwargs)`

The container from which the hero begins his flight.

For more information, see in the [MDBoxLayout](#) class documentation.

### Events

***on\_transform\_in***

when the hero flies from screen **A** to screen **B**.

***on\_transform\_out***

Called when the hero back from screen **B** to screen **A**.

### tag

Tag ID for heroes.

`tag` is an [StringProperty](#) and defaults to “”.

**`on_transform_in(self, *args)`**

Called when the hero flies from screen **A** to screen **B**.

**`on_transform_out(self, *args)`**

Called when the hero back from screen **B** to screen **A**.

**class** `kivymd.uix.hero.MDHeroTo(*args, **kwargs)`

The container in which the hero comes.

For more information, see in the [MDBoxLayout](#) class documentation.

### tag

Tag ID for heroes.

`tag` is an [StringProperty](#) and defaults to “”.

## 2.3.15 GridLayout

GridLayout class equivalent. Simplifies working with some widget properties. For example:

### GridLayout

```
GridLayout:  
    size_hint_y: None  
    height: self.minimum_height  
  
    canvas:  
        Color:  
            rgba: app.theme_cls.primary_color  
        Rectangle:  
            pos: self.pos  
            size: self.size
```

## MDGridLayout

```
MDGridLayout:  
    adaptive_height: True  
    md_bg_color: app.theme_cls.primary_color
```

Available options are:

- *adaptive\_height*
- *adaptive\_width*
- *adaptive\_size*

### adaptive\_height

```
adaptive_height: True
```

Equivalent

```
size_hint_y: None  
height: self.minimum_height
```

### adaptive\_width

```
adaptive_width: True
```

Equivalent

```
size_hint_x: None  
width: self.minimum_width
```

### adaptive\_size

```
adaptive_size: True
```

Equivalent

```
size_hint: None, None  
size: self.minimum_size
```

## API - kivymd.uix.gridlayout

```
class kivymd.uix.gridlayout.MDGridLayout(*args, **kwargs)
```

Grid layout class. For more information, see in the [GridLayout](#) class documentation.

### 2.3.16 Carousel

Carousel class equivalent. Simplifies working with some widget properties. For example:

#### Carousel

```
kv='''
YourCarousel:
    BoxLayout:
        [...]
    BoxLayout:
        [...]
    BoxLayout:
        [...]
...
builder.load_string(kv)

class YourCarousel(Carousel):
    def __init__(self, *kwargs):
        self.register_event_type("on_slide_progress")
        self.register_event_type("on_slide_complete")

    def on_touch_down(self, *args):
        ["Code to detect when the slide changes"]

    def on_touch_up(self, *args):
        ["Code to detect when the slide changes"]

    def calculate_slide_pos(self, *args):
        ["Code to calculate the current position of the slide"]

    def do_custom_animation(self, *args):
        ["Code to recreate an animation"]
```

#### MDCarousel

```
MDCarousel:
    on_slide_progress:
        do_something()
    on_slide_complete:
        do_something()
```

## API - kivymd.uix.carousel

**class** `kivymd.uix.carousel.MDCarousel(*args, **kwargs)`

based on kivy's carousel.

**See also:**

`kivy.uix.carousel.Carousel`

**on\_slide\_progress(self, \*args)**

Event launched when the Slide animation is progress. remember to bind and unbind to this method.

**on\_slide\_complete(self, \*args)**

Event launched when the Slide animation is complete. remember to bind and unbind to this method.

**on\_touch\_down(self, touch)**

Receive a touch down event.

### Parameters

**touch: MotionEvent class**

Touch received. The touch is in parent coordinates. See `relativelayout` for a discussion on coordinate systems.

### Returns

`bool` If True, the dispatching of the touch event will stop. If False, the event will continue to be dispatched to the rest of the widget tree.

**on\_touch\_up(self, touch)**

Receive a touch up event. The touch is in parent coordinates.

See `on_touch_down()` for more information.

## 2.3.17 FloatLayout

FloatLayout class equivalent. Simplifies working with some widget properties. For example:

### FloatLayout

```
FloatLayout:
    canvas:
        Color:
            rgba: app.theme_cls.primary_color
        RoundedRectangle:
            pos: self.pos
            size: self.size
            radius: [25, 0, 0, 0]
```

## MDFloatLayout

```
MDFloatLayout:
    radius: [25, 0, 0, 0]
    md_bg_color: app.theme_cls.primary_color
```

**Warning:** For a `FloatLayout`, the `minimum_size` attributes are always 0, so you cannot use `adaptive_size` and related options.

## API - `kivymd.uix.floatlayout`

```
class kivymd.uix.floatlayout.MDFloatLayout(*args, **kwargs)
```


Float layout class. For more information, see in the `FloatLayout` class documentation.

## 2.3.18 ImageList

### See also:

Material Design spec, Image lists

**Image lists display a collection of images in an organized grid.**

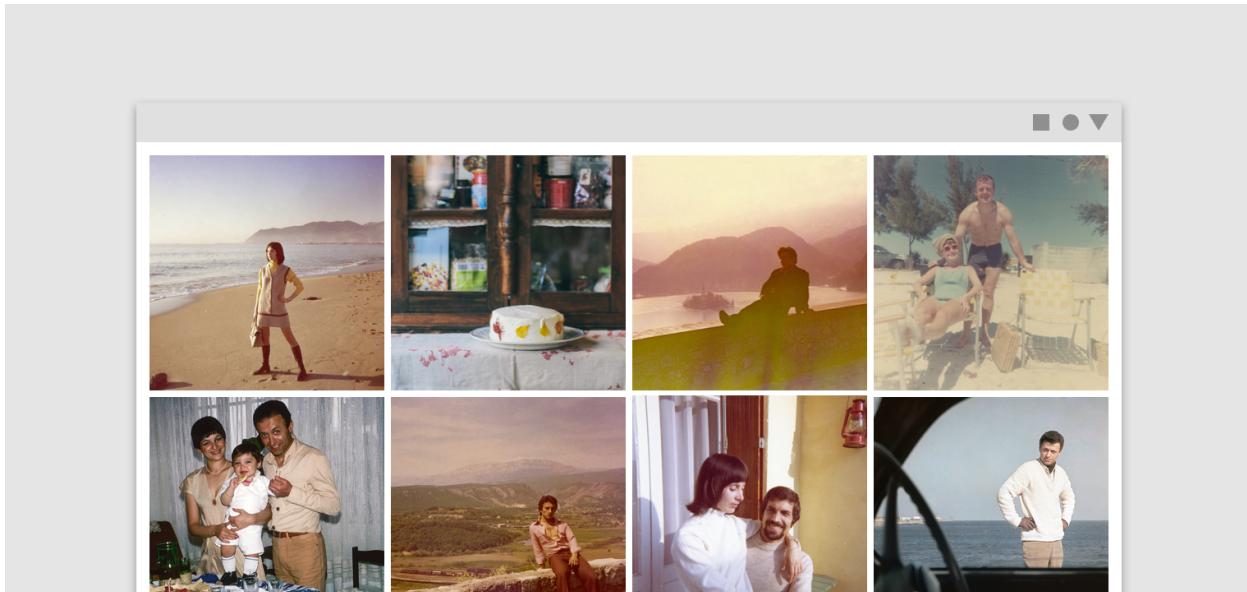

*KivyMD* provides the following tile classes for use:

## Usage

```

from kivy.lang import Builder

from kivymd.app import MDApp

KV = """
MDScreen:

    MDSmartTile:
        radius: 24
        box_radius: [0, 0, 24, 24]
        box_color: 1, 1, 1, .2
        source: "cats.jpg"
        pos_hint: {"center_x": .5, "center_y": .5}
        size_hint: None, None
        size: "320dp", "320dp"

    MDIconButton:
        icon: "heart-outline"
        theme_icon_color: "Custom"
        icon_color: 1, 0, 0, 1
        pos_hint: {"center_y": .5}
        on_release: self.icon = "heart" if self.icon == "heart-outline" else "heart-
outline"


    MDLabel:
        text: "Julia and Julie"
        bold: True
        color: 1, 1, 1, 1
    ...

class MyApp(MDApp):
    def build(self):
        return Builder.load_string(KV)

MyApp().run()

```

## Implementation

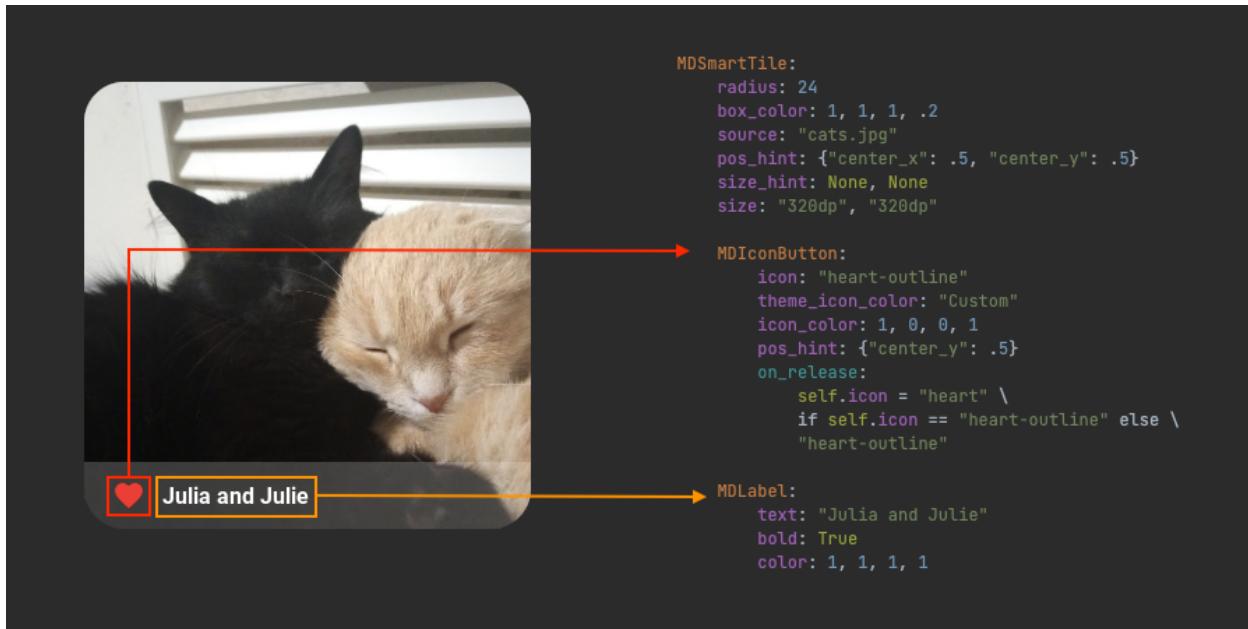

## API - kivymd.uix.imagelist.imagelist

**class kivymd.uix.imagelist.imagelist.MDSmartTile(\*args, \*\*kwargs)**

A tile for more complex needs.

Includes an image, a container to place overlays and a box that can act as a header or a footer, as described in the Material Design specs.

### Events

#### *on\_press*

Called when the button is pressed.

#### *on\_release*

Called when the button is released (i.e. the touch/click that pressed the button goes away).

#### **box\_radius**


Box radius.

New in version 1.0.0.

```

MDSmartTile:
    radius: 24
    box_radius: [0, 0, 24, 24]

```

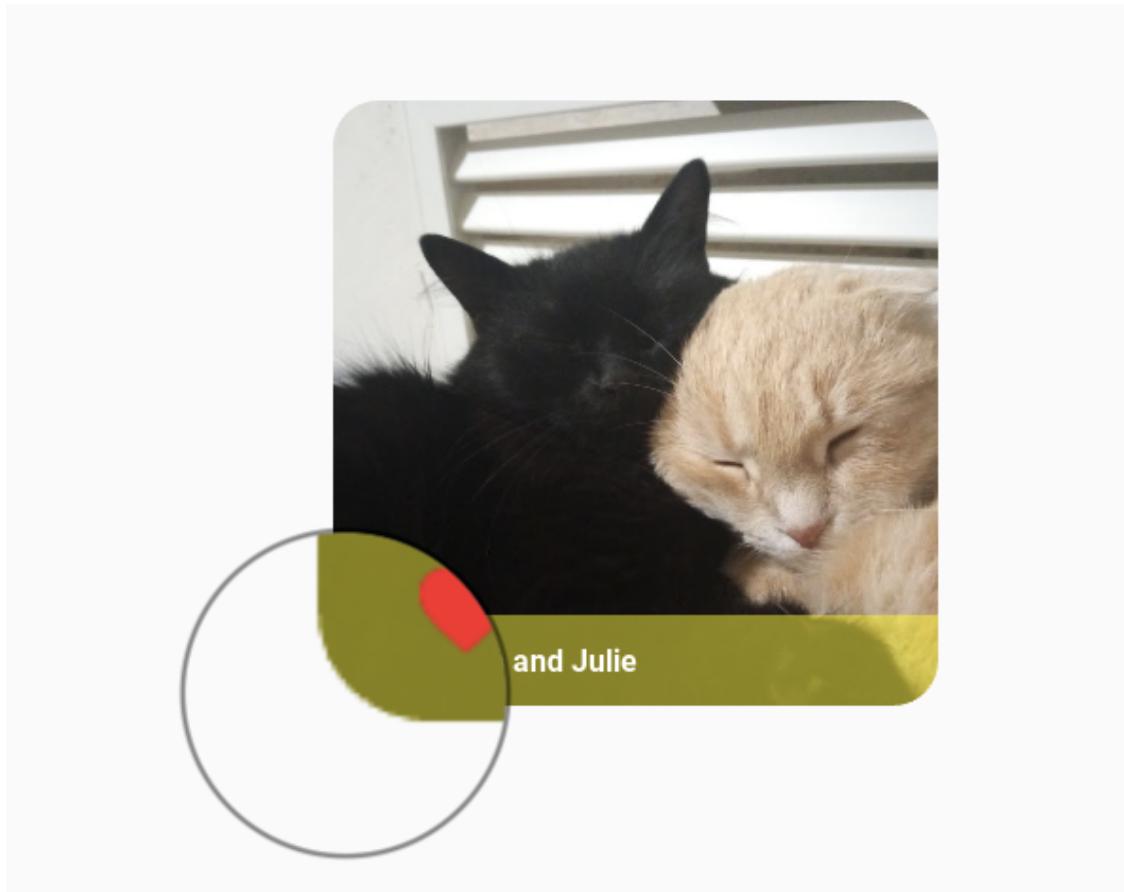


*box\_radius* is an [VariableListProperty](#) and defaults to [0, 0, 0, 0].

#### box\_color

Sets the color in (r, g, b, a) or string format and opacity for the information box.

```
MDSmartTile:  
    radius: 24  
    box_radius: [0, 0, 24, 24]  
    box_color: 0, 1, 0, .5
```

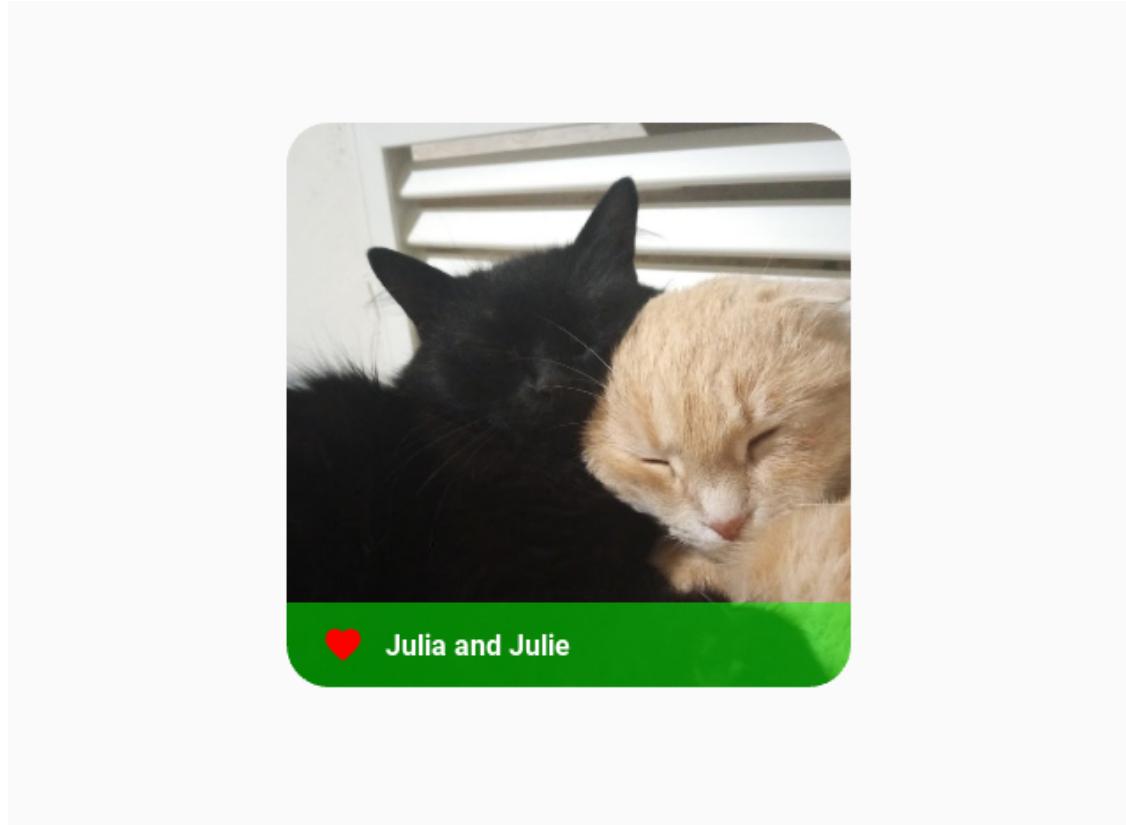


Julia and Julie

`box_color` is a `ColorProperty` and defaults to `(0, 0, 0, 0.5)`.

#### `box_position`

Determines whether the information box acts as a header or footer to the image. Available are options: `'footer'`, `'header'`.

```
MDSmartTile:  
    radius: 24  
    box_radius: [24, 24, 0, 0]  
    box_position: "header"
```

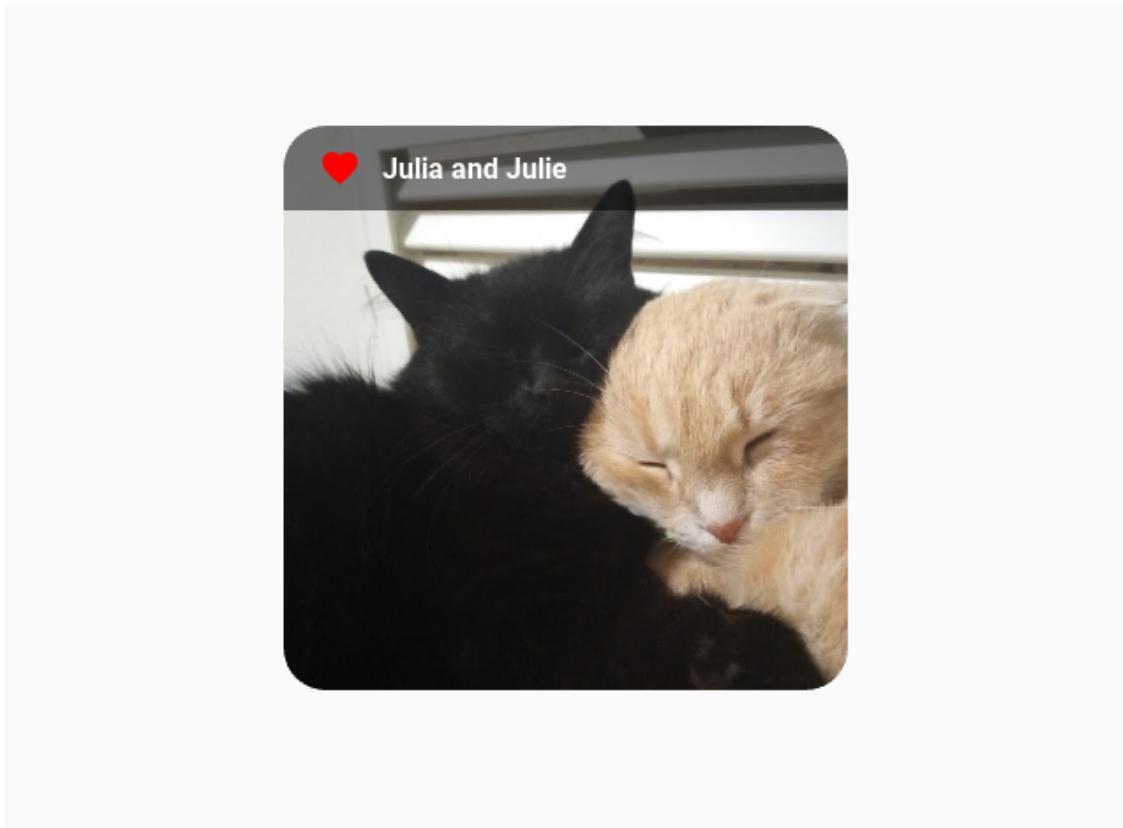


*box\_position* is a `OptionProperty` and defaults to '`footer`'.

#### **overlap**

Determines if the `header/footer` overlaps on top of the image or not.

```
MDSmartTile:  
    radius: [24, 24, 0, 0]  
    box_radius: [0, 0, 24, 24]  
    overlap: False
```

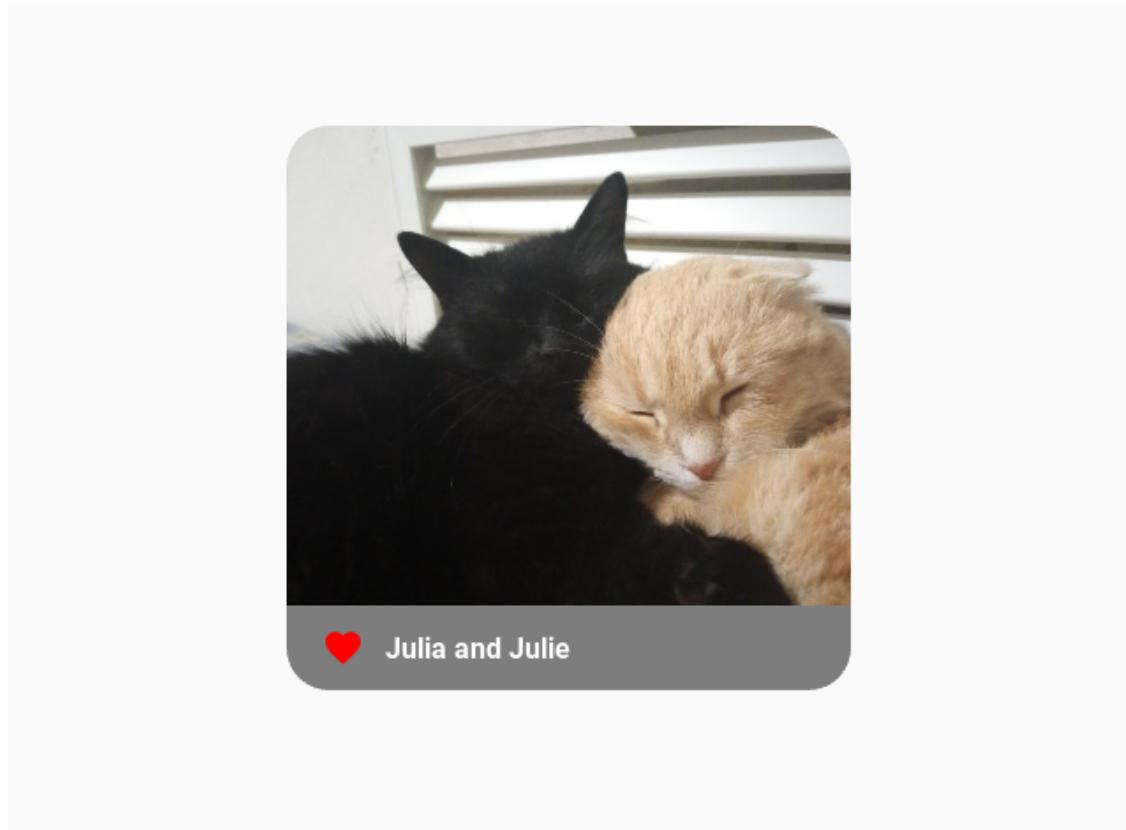

`overlap` is a BooleanProperty and defaults to *True*.


#### lines

Number of lines in the *header/footer*. As per *Material Design specs*, only 1 and 2 are valid values. Available are options: 1, 2. This parameter just increases the height of the container for custom elements.

```
MDSmartTile:  
    radius: 24  
    box_radius: [0, 0, 24, 24]  
    lines: 2  
    source: "cats.jpg"  
    pos_hint: {"center_x": .5, "center_y": .5}  
    size_hint: None, None  
    size: "320dp", "320dp"  
  
MDIconButton:  
    icon: "heart-outline"  
    theme_icon_color: "Custom"  
    icon_color: 1, 0, 0, 1  
    pos_hint: {"center_y": .5}  
    on_release: self.icon = "heart" if self.icon == "heart-outline" else  
    ↪ "heart-outline"  
  
TwoLineListItem:  
    text: "[color=#ffffff][b]My cats[/b][/color]"  
    secondary_text: "[color=#808080][b]Julia and Julie[/b][/color]"  
    pos_hint: {"center_y": .5}
```

(continues on next page)

(continued from previous page)
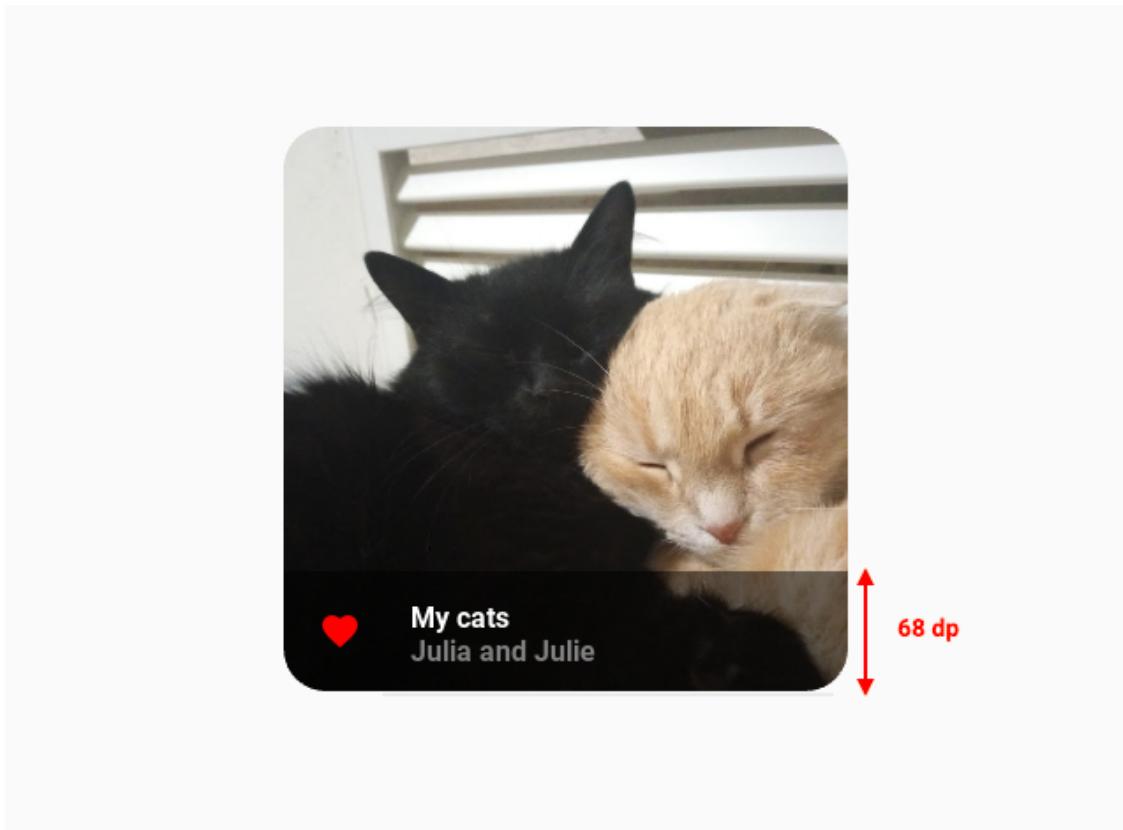
`_no_ripple_effect: True`

`lines` is a `OptionProperty` and defaults to `1`.

#### source

Path to tile image. See `source`.

`source` is a `StringProperty` and defaults to `''`.

#### mipmap

Indicate if you want OpenGL mipmaping to be applied to the texture. Read `Mipmapping` for more information.

New in version 1.0.0.

`mipmap` is a `BooleanProperty` and defaults to `False`.

#### on\_release(self, \*args)

Called when the button is released (i.e. the touch/click that pressed the button goes away).

#### on\_press(self, \*args)

Called when the button is pressed.

#### add\_widget(self, widget, \*args, \*\*kwargs)

Add a new widget as a child of this widget.

#### Parameters

##### `widget: Widget`

Widget to add to our list of children.

***index: int, defaults to 0***

Index to insert the widget in the list. Notice that the default of 0 means the widget is inserted at the beginning of the list and will thus be drawn on top of other sibling widgets. For a full discussion of the index and widget hierarchy, please see the Widgets Programming Guide.

New in version 1.0.5.

***canvas: str, defaults to None***

Canvas to add widget's canvas to. Can be 'before', 'after' or None for the default canvas.

New in version 1.9.0.

```
>>> from kivy.uix.button import Button
>>> from kivy.uix.slider import Slider
>>> root = Widget()
>>> root.add_widget(Button())
>>> slider = Slider()
>>> root.add_widget(slider)
```

### 2.3.19 RefreshLayout

#### Example

```
from kivy.clock import Clock
from kivy.lang import Builder
from kivy.factory import Factory
from kivy.properties import StringProperty

from kivymd.app import MDApp
from kivymd.uix.button import MDIconButton
from kivymd.icon_definitions import md_icons
from kivymd.uix.list import ILeftBodyTouch, OneLineIconListItem
from kivymd.theming import ThemeManager
from kivymd.utils import asynckivy

Builder.load_string('''
<ItemForList>
    text: root.text

    IconLeftSampleWidget:
        icon: root.icon

<Example@MDFloatLayout>

    MDBoxLayout:
        orientation: 'vertical'
```

(continues on next page)

(continued from previous page)

```

MDTopAppBar:
    title: app.title
    md_bg_color: app.theme_cls.primary_color
    background_palette: 'Primary'
    elevation: 4
    left_action_items: [['menu', lambda x: x]]


MDScrollViewRefreshLayout:
    id: refresh_layout
    refresh_callback: app.refresh_callback
    root_layout: root


MDGridLayout:
    id: box
    adaptive_height: True
    cols: 1
''')


class IconLeftSampleWidget(ILeftBodyTouch, MDIconButton):
    pass


class ItemForList(OneLineIconListItem):
    icon = StringProperty()


class Example(MDApp):
    title = 'Example Refresh Layout'
    screen = None
    x = 0
    y = 15

    def build(self):
        self.screen = Factory.Example()
        self.set_list()

        return self.screen

    def set_list(self):
        async def set_list():
            names_icons_list = list(md_icons.keys())[self.x:self.y]
            for name_icon in names_icons_list:
                await asynckivy.sleep(0)
                self.screen.ids.box.add_widget(
                    ItemForList(icon=name_icon, text=name_icon))
        asynckivy.start(set_list())

    def refresh_callback(self, *args):
        '''A method that updates the state of your application
        while the spinner remains on the screen.'''

```

(continues on next page)

(continued from previous page)

```
def refresh_callback(interval):
    self.screen.ids.box.clear_widgets()
    if self.x == 0:
        self.x, self.y = 15, 30
    else:
        self.x, self.y = 0, 15
    self.set_list()
    self.screen.ids.refresh_layout.refresh_done()
    self.tick = 0

Clock.schedule_once(refresh_callback, 1)
```

```
Example().run()
```

#### API - kivymd.uix.refreshlayout.refreshlayout

**class kivymd.uix.refreshlayout.refreshlayout.MDScrollViewRefreshLayout(\*args, \*\*kwargs)**

ScrollView class. For more information, see in the [ScrollView](#) class documentation.

##### **root\_layout**

The spinner will be attached to this layout.

*root\_layout* is a [ObjectProperty](#) and defaults to *None*.

##### **refresh\_callback**

The method that will be called at the `on_touch_up` event, provided that the overscroll of the list has been registered.

*refresh\_callback* is a [ObjectProperty](#) and defaults to *None*.

##### **on\_touch\_up(self, \*args)**

Receive a touch up event. The touch is in parent coordinates.

See `on_touch_down()` for more information.

##### **refresh\_done(self)**

## 2.3.20 DataTables

### See also:

[Material Design spec, DataTables](#)

**Data tables display sets of data across rows and columns.**

<input type="checkbox"/>	Online	Astrid: NE shared mail
<input checked="" type="checkbox"/>	Offline	Cosmo: prod shared account
<input checked="" type="checkbox"/>	Online	Phoenix: prod shared location
<input type="checkbox"/>	Online	Sirius: prod shared account

**Note:** *MDDDataTable* allows developers to sort the data provided by column. This happens thanks to the use of an external function that you can bind while you're defining the table columns. Be aware that the sorting function must return a 2 value list in the format of:

*[Index, Sorted\_Row\_Data]*

This is because the index list is needed to allow MDDDataTable to keep track of the selected rows. and, after the data is sorted, update the row checkboxes.

## API - `kivymd.uix.datatables.datatables`

`class kivymd.uix.datatables.datatables.MDDDataTable(**kwargs)`

See [AnchorLayout](#) class documentation for more information.

### Events

#### `on_row_press`

Called when a table row is clicked.

#### `on_check_press`

Called when the check box in the table row is checked.

### Use events as follows

```
from kivy.metrics import dp

from kivymd.app import MDApp
from kivymd.uix.datatables import MDDDataTable
from kivymd.uix.screen import MDScreen

class Example(MDApp):
    def build(self):
        self.data_tables = MDDDataTable(
```

(continues on next page)

(continued from previous page)

```

use_pagination=True,
check=True,
column_data=[
    ("No.", dp(30)),
    ("Status", dp(30)),
    ("Signal Name", dp(60), self.sort_on_signal),
    ("Severity", dp(30)),
    ("Stage", dp(30)),
    ("Schedule", dp(30), self.sort_on_schedule),
    ("Team Lead", dp(30), self.sort_on_team),
],
row_data=[
    (
        "1",
        ("alert", [255 / 256, 165 / 256, 0, 1], "No Signal"),
        "Astrid: NE shared managed",
        "Medium",
        "Triaged",
        "0:33",
        "Chase Nguyen",
    ),
    (
        "2",
        ("alert-circle", [1, 0, 0, 1], "Offline"),
        "Cosmo: prod shared ares",
        "Huge",
        "Triaged",
        "0:39",
        "Brie Furman",
    ),
    (
        "3",
        (
            "checkbox-marked-circle",
            [39 / 256, 174 / 256, 96 / 256, 1],
            "Online",
        ),
        "Phoenix: prod shared lyra-lists",
        "Minor",
        "Not Triaged",
        "3:12",
        "Jeremy lake",
    ),
    (
        "4",
        (
            "checkbox-marked-circle",
            [39 / 256, 174 / 256, 96 / 256, 1],
            "Online",
        ),
        "Sirius: NW prod shared locations",
        "Negligible",
    )
]

```

(continues on next page)

(continued from previous page)

```

        "Triaged",
        "13:18",
        "Angelica Howards",
    ),
    (
        "5",
        (
            "checkbox-marked-circle",
            [39 / 256, 174 / 256, 96 / 256, 1],
            "Online",
        ),
        "Sirius: prod independent account",
        "Negligible",
        "Triaged",
        "22:06",
        "Diane Okuma",
    ),
),
sorted_on="Schedule",
sorted_order="ASC",
elevation=2,
)
self.data_tables.bind(on_row_press=self.on_row_press)
self.data_tables.bind(on_check_press=self.on_check_press)
screen = MDScreen()
screen.add_widget(self.data_tables)
return screen

def on_row_press(self, instance_table, instance_row):
    '''Called when a table row is clicked.'''
    print(instance_table, instance_row)

def on_check_press(self, instance_table, current_row):
    '''Called when the check box in the table row is checked.'''
    print(instance_table, current_row)

# Sorting Methods:
# since the https://github.com/kivymd/KivyMD/pull/914 request, the
# sorting method requires you to sort out the indexes of each data value
# for the support of selections.
#
# The most common method to do this is with the use of the builtin function
# zip and enumerate, see the example below for more info.
#
# The result given by these funcitons must be a list in the format of
# [Indexes, Sorted_Row_Data]

def sort_on_signal(self, data):
    return zip(*sorted(enumerate(data), key=lambda l: l[1][2]))

```

(continues on next page)

(continued from previous page)

```

def sort_on_schedule(self, data):
    return zip(
        *sorted(
            enumerate(data),
            key=lambda l: sum(
                [
                    int(l[1][-2].split(":")[0]) * 60,
                    int(l[1][-2].split(":")[1]),
                ]
            ),
        )
    )

def sort_on_team(self, data):
    return zip(*sorted(enumerate(data), key=lambda l: l[1][-1]))

```

Example().run()

**column\_data**

Data for header columns.

Imperative python style

```

from kivy.metrics import dp

from kivymd.app import MDApp
from kivymd.uix.datatables import MDDDataTable
from kivymd.uix.anchorlayout import AnchorLayout


class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"

        layout = AnchorLayout()
        self.data_tables = MDDDataTable(
            size_hint=(0.7, 0.6),
            use_pagination=True,
            check=True,
            # name column, width column, sorting function column(optional),
            # custom tooltip
            column_data=[
                ("No.", dp(30), None, "Custom tooltip"),
                ("Status", dp(30)),
                ("Signal Name", dp(60)),
                ("Severity", dp(30)),
                ("Stage", dp(30)),
                ("Schedule", dp(30), lambda *args: print("Sorted using Schedule")),
                ("Team Lead", dp(30)),
            ],
        )

```

(continues on next page)

(continued from previous page)

```

        ],
    )
    layout.add_widget(self.data_tables)
    return layout

```

```
Example().run()
```

Declarative python style

```

from kivy.metrics import dp

from kivymd.app import MDApp
from kivymd.uix.anchorlayout import MDAnchorLayout
from kivymd.uix.datatables import MDDDataTable


class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return MDAnchorLayout(
            MDDDataTable(
                size_hint=(0.7, 0.6),
                use_pagination=True,
                check=True,
                # name column, width column, sorting function column(optional)
                column_data=[
                    ("No.", dp(30)),
                    ("Status", dp(30)),
                    ("Signal Name", dp(60)),
                    ("Severity", dp(30)),
                    ("Stage", dp(30)),
                    ("Schedule", dp(30),
                     lambda *args: print("Sorted using Schedule")),
                    ("Team Lead", dp(30)),
                ],
            )
        )

```

```
Example().run()
```

<input type="checkbox"/>	No.	Status	Signal Name	Severity	Stage

Rows per page: 0 < > 1-5 of 0

`column_data` is an [ListProperty](#) and defaults to `[]`.

**Note:** The functions which will be called for sorting must accept a data argument and return the sorted data. Incoming data format will be similar to the provided `row_data` except that it'll be all list instead of tuple like below. Any icon provided initially will also be there in this data so handle accordingly.

```
[
  [
    "1",
    ["icon", "No Signal"],
    "Astrid: NE shared managed",
    "Medium",
    "Triaged",
    "0:33",
    "Chase Nguyen",
  ],
  [
    "2",
    "Offline",
    "Cosmo: prod shared ares",
    "Huge",
    "Triaged",
    "0:39",
    "Brie Furman",
  ],
  [
    "3",
    "Online",
    "Phoenix: prod shared lyra-lists",
    "Minor",
    "Not Triaged",
    "3:12",
    "Jeremy lake",
  ],
]
```

(continues on next page)

(continued from previous page)

```

    "4",
    "Online",
    "Sirius: NW prod shared locations",
    "Negligible",
    "Triaged",
    "13:18",
    "Angelica Howards",
],
[
    "5",
    "Online",
    "Sirius: prod independent account",
    "Negligible",
    "Triaged",
    "22:06",
    "Diane Okuma",
],
]

```

You must sort inner lists in ascending order and return the sorted data in the same format.

### **row\_data**

Data for rows. To add icon in addition to a row data, include a tuple with This property stores the row data used to display each row in the DataTable To show an icon inside a column in a row, use the folowing format in the row's columns.

Format:

(“MDicon-name”, [icon color in rgba], “Column Value”)

Example:

For a more complex example see below.

```

from kivy.metrics import dp
from kivymd.uix.anchorlayout import AnchorLayout

from kivymd.app import MDApp
from kivymd.uix.datatables import MDDDataTable


class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"

        layout = AnchorLayout()
        data_tables = MDDDataTable(
            size_hint=(0.9, 0.6),
            column_data=[
                ("Column 1", dp(20)),
                ("Column 2", dp(30)),
                ("Column 3", dp(50), self.sort_on_col_3),

```

(continues on next page)

(continued from previous page)

```

("Column 4", dp(30)),
("Column 5", dp(30)),
("Column 6", dp(30)),
("Column 7", dp(30), self.sort_on_col_2),
],
row_data=[# The number of elements must match the length
# of the `column_data` list.
(
    "1",
    ("alert", [255 / 256, 165 / 256, 0, 1], "No Signal"),
    "Astrid: NE shared managed",
    "Medium",
    "Triaged",
    "0:33",
    "Chase Nguyen",
),
(
    "2",
    ("alert-circle", [1, 0, 0, 1], "Offline"),
    "Cosmo: prod shared ares",
    "Huge",
    "Triaged",
    "0:39",
    "Brie Furman",
),
(
    "3",
    (
        "checkbox-marked-circle",
        [39 / 256, 174 / 256, 96 / 256, 1],
        "Online",
    ),
    "Phoenix: prod shared lyra-lists",
    "Minor",
    "Not Triaged",
    "3:12",
    "Jeremy lake",
),
(
    "4",
    (
        "checkbox-marked-circle",
        [39 / 256, 174 / 256, 96 / 256, 1],
        "Online",
    ),
    "Sirius: NW prod shared locations",
    "Negligible",
    "Triaged",
    "13:18",
    "Angelica Howards",
),
]

```

(continues on next page)

(continued from previous page)

```

        (
            "5",
            (
                "checkbox-marked-circle",
                [39 / 256, 174 / 256, 96 / 256, 1],
                "Online",
            ),
            "Sirius: prod independent account",
            "Negligible",
            "Triaged",
            "22:06",
            "Diane Okuma",
        ),
    ],
)
layout.add_widget(data_tables)
return layout

def sort_on_col_3(self, data):
    return zip(
        *sorted(
            enumerate(data),
            key=lambda l: l[1][3]
        )
    )

def sort_on_col_2(self, data):
    return zip(
        *sorted(
            enumerate(data),
            key=lambda l: l[1][-1]
        )
    )

Example().run()

```

The screenshot shows a KivyMD DataTables component with a dark background. It has six columns with headers: Column 1, Column 2, Column 3, Column 4, Column 5, and Column 6. The data rows are as follows:

Column 1	Column 2	Column 3	Column 4	Column 5	Column 6
1	⚠️ No Signal	Astrid: NE shared managed	Medium	Triaged	0:33
2	❗ Offline	Cosmo: prod shared ares	Huge	Triaged	0:39
3	🟢 Online	Phoenix: prod shared lyra-lists	Minor	Not Triaged	3:12
4	🟢 Online	Sirius: NW prod shared locations	Negligible	Triaged	13:18
5	🟢 Online	Sirius: prod independent account	Negligible	Triaged	22:06

`row_data` is an `ListProperty` and defaults to `[]`.

**sorted\_on**

Column name upon which the data is already sorted.

If the table data is showing an already sorted data then this can be used to indicate upon which column the data is sorted.

*sorted\_on* is an [StringProperty](#) and defaults to ''.

**sorted\_order**

Order of already sorted data. Must be one of 'ASC' for ascending or 'DSC' for descending order.

*sorted\_order* is an [OptionProperty](#) and defaults to 'ASC'.

**check**

Use or not use checkboxes for rows.

	Column 1	Column 2	Column 3	Column 4	Column 5	Column 6
<input checked="" type="checkbox"/>	1	⚠️ No Signal	Astrid: NE shared managed	Medium	Triaged	0:33
<input checked="" type="checkbox"/>	2	❗ Offline	Cosmo: prod shared ares	Huge	Triaged	0:39
<input checked="" type="checkbox"/>	3	🟢 Online	Phoenix: prod shared lyra-lists	Minor	Not Triaged	3:12
<input type="checkbox"/>	4	🟢 Online	Sirius: NW prod shared locations	Negligible	Triaged	13:18
<input type="checkbox"/>	5	🟢 Online	Sirius: prod independent account	Negligible	Triaged	22:06

*check* is an [BooleanProperty](#) and defaults to *False*.

**use\_pagination**

Use page pagination for table or not.

```
from kivy.metrics import dp
from kivy.uix.anchorlayout import AnchorLayout

from kivymd.app import MDApp
from kivymd.uix.datatables import MDDDataTable

class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"

        layout = AnchorLayout()
        data_tables = MDDDataTable(
            size_hint=(0.9, 0.6),
            use_pagination=True,
            column_data=[
                ("No.", dp(30)),
                ("Column 1", dp(30)),
                ("Column 2", dp(30)),
```

(continues on next page)

(continued from previous page)

```

        ("Column 3", dp(30)),
        ("Column 4", dp(30)),
        ("Column 5", dp(30)),
    ],
    row_data=[
        (f"{i + 1}", "1", "2", "3", "4", "5") for i in range(50)
    ],
)
layout.add_widget(data_tables)
return layout

```

Example().run()

No.	Column 1	Column 2	Column 3	Column 4	Column 5
1	1	2	3	4	5
2	1	2	3	4	5
3	1	2	3	4	5
4	1	2	3	4	5
5	1	2	3	4	5

*use\_pagination* is an BooleanProperty and defaults to *False*.**elevation**

Table elevation.

*elevation* is an NumericProperty and defaults to 4.**rows\_num**

The number of rows displayed on one page of the table.

No.	Column 1	Column 2	Column 3	Column 4	Column 5
1	1	2	3	4	5
2	1	2	3	4	5
3	1	2	3	4	5
4	1	2	3	4	5
5	1	2	3	4	5

`rows_num` is an `NumericProperty` and defaults to `10`.

#### **`pagination_menu_pos`**

Menu position for selecting the number of displayed rows. Available options are ‘center’, ‘auto’.

#### **Center**

A screenshot of a table with 5 columns and 5 rows. The columns are labeled 'No.', 'Column 1', 'Column 2', 'Column 3', 'Column 4', and 'Column 5'. The rows contain numerical values from 1 to 5. A dark gray dropdown menu is open over the last row, showing two options: '5' and '10'. At the bottom of the table, there is a footer bar with the text 'Rows per page' followed by a dropdown menu set to '5', and navigation buttons for '1-50 of 50', '<', and '>'.

No.	Column 1	Column 2	Column 3	Column 4	Column 5
1	1	2	3	4	5
2	1	2	3	4	5
3	1	2	3	4	5
4	1	2	3	4	5
5	1	2	3	4	5

#### **Auto**

A screenshot of a table with 5 columns and 5 rows, identical to the one above. The columns are labeled 'No.', 'Column 1', 'Column 2', 'Column 3', 'Column 4', and 'Column 5'. The rows contain numerical values from 1 to 5. A dark gray dropdown menu is open over the last row, showing two options: '5' and '10'. At the bottom of the table, there is a footer bar with the text 'Rows per page' followed by a dropdown menu set to '5', and navigation buttons for '1-50 of 50', '<', and '>'.

No.	Column 1	Column 2	Column 3	Column 4	Column 5
1	1	2	3	4	5
2	1	2	3	4	5
3	1	2	3	4	5
4	1	2	3	4	5
5	1	2	3	4	5

`pagination_menu_pos` is an `OptionProperty` and defaults to ‘center’.

#### **`pagination_menu_height`**

Menu height for selecting the number of displayed rows.

240dp

No.	Column 1	Column 2	Column 3	Column 4	Column 5
1	1	2	3	4	5
2	1	2	3	4	5
3	1	2	3	4	5
4	1	2	3	4	5
5	1	2	3	4	5
6	1	2	3	4	5
7	1	2	3	4	5
8	1	2	3	4	5
9	1	2	3	4	5
10	1	2	3	4	5
11	1	2	3	4	5
12	1	2	3	4	5
13	1	2	3	4	5
14	1	2	3	4	5
15	1	2	3	4	5
16	1	2	3	4	5
17	1	2	3	4	5
18	1	2	3	4	5
19	1	2	3	4	5
20	1	2	3	4	5

`pagination_menu_height` is an `NumericProperty` and defaults to '140dp'.

#### background\_color

Background color in the format (r, g, b, a) or string format. See `background_color`.

```
from kivy.metrics import dp
from kivymd.uix.anchorlayout import AnchorLayout

from kivymd.app import MDApp
from kivymd.uix.datatables import MDDDataTable


class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"

        layout = AnchorLayout()
        data_tables = MDDDataTable(
            size_hint=(0.9, 0.6),
            use_pagination=True,
            column_data=[
                ("No.", dp(30)),
                ("Column 1", dp(30)),
                ("[color=#52251B]Column 2[/color]", dp(30)),
                ("Column 3", dp(30)),
                ("[size=24][color=#C042B8]Column 4[/color][/size]", dp(30)),
                ("Column 5", dp(30)),
            ],
            row_data=[
                (
                    f"{i + 1}",
                    "[color=#297B50]1[/color]",
                    "[color=#C552A1]2[/color]",
                    "[color=#6C9331]3[/color]",
                    "4",
                )
                for i in range(20)
            ],
        )
        layout.add_widget(data_tables)
        return layout
```

(continues on next page)

(continued from previous page)

```

        "5",
    )
    for i in range(50)
],
)
layout.add_widget(data_tables)
return layout

```

```
Example().run()
```

No.	Column 1	Column 2	Column 3	Column 4	Column 5
1	1	2	3	4	5
2	1	2	3	4	5
3	1	2	3	4	5
4	1	2	3	4	5
5	1	2	3	4	5

Rows per page: 5 < > 1-50 of 50

*background\_color* is a `ColorProperty` and defaults to [0, 0, 0, 0].

#### **background\_color\_header**

Background color in the format (r, g, b, a) or string format for `TableHeader` class.

New in version 1.0.0.

```

self.data_tables = MDDataTable(
    ...,
    background_color_header="#65275d",
)

```

No.	Column 1	Column 2	Column 3	Column 4	Column 5
1	1	2	3	4	5
2	1	2	3	4	5
3	1	2	3	4	5
4	1	2	3	4	5
5	1	2	3	4	5

Rows per page: 5 < > 1-50 of 50

*background\_color\_header* is a `ColorProperty` and defaults to `None`.

### **background\_color\_cell**

Background color in the format (r, g, b, a) or string format for `CellRow` class.

New in version 1.0.0.

```
self.data_tables = MDDataTable(
    ...,
    background_color_header="#65275d",
    background_color_cell="#451938",
)
```

The screenshot shows a data table with a header row and five data rows. The header row has a light purple background. The data rows have a dark purple background. The table has five columns labeled 'No.', 'Column 1', 'Column 2', 'Column 3', 'Column 4', and 'Column 5'. Each cell contains a numerical value from 1 to 5. At the bottom of the table, there is a footer bar with the text 'Rows per page' followed by a dropdown menu set to '5', and navigation buttons for '1-50 of 50', '<', and '>'.

No.	Column 1	Column 2	Column 3	Column 4	Column 5
1	1	2	3	4	5
2	1	2	3	4	5
3	1	2	3	4	5
4	1	2	3	4	5
5	1	2	3	4	5

*background\_color\_cell* is a `ColorProperty` and defaults to `None`.

### **background\_color\_selected\_cell**

Background selected color in the format (r, g, b, a) or string format for `CellRow` class.

New in version 1.0.0.

```
self.data_tables = MDDataTable(
    ...,
    background_color_header="#65275d",
    background_color_cell="#451938",
    background_color_selected_cell="e4514f",
)
```

No.	Column 1	Column 2	Column 3	Column 4	Column 5
1	1	2	3	4	5
2	1	2	3	4	5
3	1	2	3	4	5
4	1	2	3	4	5
5	1	2	3	4	5

`background_color_selected_cell` is a `ColorProperty` and defaults to `None`.

### `effect_cls`

Effect class. See `kivy/effects` package for more information.

New in version 1.0.0.

`effect_cls` is an `ObjectProperty` and defaults to `StiffScrollEffect`.

### `update_row_data(self, instance_data_table, data: list)`

Called when a the widget data must be updated.

Remember that this is a heavy function. since the whole data set must be updated. you can get better results calling this metod with in a coroutine.

### `add_row(self, data: Union[list, tuple])`

Added new row to common table. Argument `data` is the row data from the list `row_data`.

## Add/remove row

```
from kivy.metrics import dp

from kivymd.app import MDApp
from kivymd.uix.datatables import MDDDataTable
from kivymd.uix.boxlayout import MDBBoxLayout
from kivymd.uix.floatlayout import MDFloatLayout
from kivymd.uix.button import MDRaisedButton


class Example(MDApp):
    data_tables = None

    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"

        layout = MDFloatLayout() # root layout
        # Creating control buttons.
        button_box = MDBBoxLayout(
            size_hint=(1, 0.1),
            padding=[0, 10, 0, 10],
            spacing=10,
        )
        button_box.add_widget(MDRaisedButton(
            text="Add Row",
            on_release=lambda x: self.add_row(),
        ))
        button_box.add_widget(MDRaisedButton(
            text="Delete Row",
            on_release=lambda x: self.delete_row(),
        ))
```

(continues on next page)

(continued from previous page)

```

        pos_hint={"center_x": 0.5},
        adaptive_size=True,
        padding="24dp",
        spacing="24dp",
    )

    for button_text in ["Add row", "Remove row"]:
        button_box.add_widget(
            MDRaisedButton(
                text=button_text, on_release=self.on_button_press
            )
        )

    # Create a table.
    self.data_tables = MDDataTable(
        pos_hint={"center_y": 0.5, "center_x": 0.5},
        size_hint=(0.9, 0.6),
        use_pagination=False,
        column_data=[
            ("No.", dp(30)),
            ("Column 1", dp(40)),
            ("Column 2", dp(40)),
            ("Column 3", dp(40)),
        ],
        row_data=[("1", "1", "2", "3")],
    )
    # Adding a table and buttons to the layout.
    layout.add_widget(self.data_tables)
    layout.add_widget(button_box)

    return layout

def on_button_press(self, instance_button: MDRaisedButton) -> None:
    '''Called when a control button is clicked.'''
    try:
        {
            "Add row": self.add_row,
            "Remove row": self.remove_row,
        }[instance_button.text]()
    except KeyError:
        pass

    def add_row(self) -> None:
        last_num_row = int(self.data_tables.row_data[-1][0])
        self.data_tables.add_row((str(last_num_row + 1), "1", "2", "3"))

    def remove_row(self) -> None:
        if len(self.data_tables.row_data) > 1:
            self.data_tables.remove_row(self.data_tables.row_data[-1])

```

(continues on next page)

(continued from previous page)

<code>Example().run()</code>
------------------------------

New in version 1.0.0.

`remove_row(self, data: Union[list, tuple])`

Removed row from common table. Argument `data` is the row data from the list `row_data`.

See the code in the doc string for the `add_row` method for more information.

New in version 1.0.0.

`update_row(self, old_data: Union[list, tuple], new_data: Union[list, tuple])`

Updates a table row. Argument `old_data/new_data` is the row data from the list `row_data`.

## Update row

```
from kivy.metrics import dp

from kivymd.app import MDApp
from kivymd.uix.datatables import MDDDataTable
from kivymd.uix.floatlayout import MDFloatLayout
from kivymd.uix.button import MDRaisedButton


class Example(MDApp):
    data_tables = None

    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"

        layout = MDFloatLayout()
        layout.add_widget(
            MDFlatButton(
                text="Change 2 row",
                pos_hint={"center_x": 0.5},
                on_release=self.update_row,
                y=24,
            )
        )
        self.data_tables = MDDDataTable(
            pos_hint={"center_y": 0.5, "center_x": 0.5},
            size_hint=(0.9, 0.6),
            use_pagination=False,
            column_data=[
                ("No.", dp(30)),
                ("Column 1", dp(40)),
                ("Column 2", dp(40)),
                ("Column 3", dp(40)),
            ],
            row_data=[(f"{{i + 1}}", "1", "2", "3") for i in range(3)],
        )

    def update_row(self, instance, value, index):
        if value == "Change 2 row":
            self.data_tables.row_data[0] = ("No.", "1", "2", "3")
            self.data_tables.row_data[1] = ("Column 1", "1", "2", "3")
            self.data_tables.row_data[2] = ("Column 2", "1", "2", "3")
            self.data_tables.row_data[3] = ("Column 3", "1", "2", "3")
```

(continues on next page)

(continued from previous page)

```

        )
    layout.add_widget(self.data_tables)

    return layout

def update_row(self, instance_button: MDRaisedButton) -> None:
    self.data_tables.update_row(
        self.data_tables.row_data[1], # old row data
        ["2", "A", "B", "C"], # new row data
    )

```

```
Example().run()
```

New in version 1.0.0.

**on\_row\_press**(*self, instance\_cell\_row*)

Called when a table row is clicked.

**on\_check\_press**(*self, row\_data: list*)

Called when the check box in the table row is checked.

#### Parameters

**row\_data** – One of the elements from the *MDDDataTable.row\_data* list.

**get\_row\_checks**(*self*)

Returns all rows that are checked.


**create\_pagination\_menu**(*self, interval: Union[int, float]*)

### 2.3.21 Slider

#### See also:

Material Design spec, Sliders

Sliders allow users to make selections from a range of values.



#### API - kivymd.uix.slider.slider

`class kivymd.uix.slider.slider.MDSlider(**kwargs)`

Class for creating a Slider widget. See in the [Slider](#) class documentation.

##### **active**

If the slider is clicked.

`active` is an [BooleanProperty](#) and defaults to *False*.

##### **color**

Color slider in (r, g, b, a) or string format.

```
MDSlider  
    color: "red"
```



`color` is an [ColorProperty](#) and defaults to *None*.

##### **hint**

If True, then the current value is displayed above the slider.

```
MDSlider  
    hint: True
```




`hint` is an `BooleanProperty` and defaults to `True`.

#### **hint\_bg\_color**

Hint rectangle color in (r, g, b, a) or string format.

```
MDSlider
    hint: True
    hint_bg_color: "red"
```

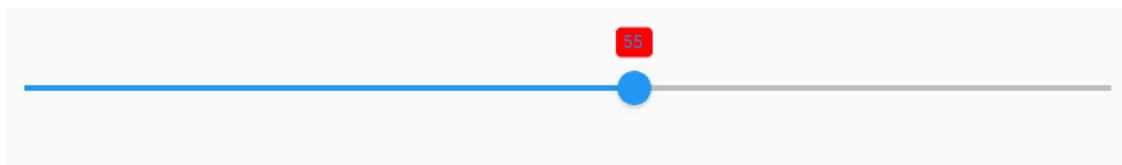

`hint_bg_color` is an `ColorProperty` and defaults to [0, 0, 0, 0].

#### **hint\_text\_color**

Hint text color in (r, g, b, a) or string format.

```
MDSlider
    hint: True
    hint_bg_color: "red"
    hint_text_color: "white"
```



`hint_text_color` is an `ColorProperty` and defaults to `None`.

#### **hint\_radius**

Hint radius.

```
MDSlider
    hint: True
    hint_bg_color: "red"
    hint_text_color: "white"
    hint_radius: [6, 0, 6, 0]
```



`hint_radius` is an `VariableListProperty` and defaults to [`dp(4)`, `dp(4)`, `dp(4)`, `dp(4)`].

### **thumb\_color\_active**

The color in (r, g, b, a) or string format of the thumb when the slider is active.

New in version 1.0.0.

```
MDSlider
```

```
    thumb_color_active: "red"
```



*thumb\_color\_active* is an [ColorProperty](#) and default to *None*.

### **thumb\_color\_inactive**

The color in (r, g, b, a) or string format of the thumb when the slider is inactive.

New in version 1.0.0.

```
MDSlider
```

```
    thumb_color_inactive: "red"
```



*thumb\_color\_inactive* is an [ColorProperty](#) and default to *None*.

### **thumb\_color\_disabled**

The color in (r, g, b, a) or string format of the thumb when the slider is in the disabled state.

New in version 1.0.0.

```
MDSlider
```

```
    value: 55
```

```
    disabled: True
```

```
    thumb_color_disabled: "red"
```



*thumb\_color\_disabled* is an [ColorProperty](#) and default to *None*.

### **track\_color\_active**

The color in (r, g, b, a) or string format of the track when the slider is active.

New in version 1.0.0.

```
MDSlider
```

```
    track_color_active: "red"
```



`track_color_active` is an `ColorProperty` and default to `None`.

#### **track\_color\_inactive**

The color in (r, g, b, a) or string format of the track when the slider is inactive.

New in version 1.0.0.

```
MDSlider
    track_color_inactive: "red"
```



`track_color_inactive` is an `ColorProperty` and default to `None`.

#### **track\_color\_disabled**

The color in (r, g, b, a) or string format of the track when the slider is in the disabled state.

New in version 1.0.0.

```
MDSlider
    disabled: True
    track_color_disabled: "red"
```



`track_color_disabled` is an `ColorProperty` and default to `None`.

#### **show\_off**

Show the ‘off’ ring when set to minimum value.

`show_off` is an `BooleanProperty` and defaults to `True`.

`set_thumb_icon(self, *args)`

`on_hint(self, instance, value)`

`on_value_normalized(self, *args)`

When the value == min set it to ‘off’ state and make slider a ring.

`on_show_off(self, *args)`

`on__is_off(self, *args)`

`on_active(self, *args)`

**on\_touch\_down(self, touch)**

Receive a touch down event.

**Parameters**

**touch: MotionEvent class**

Touch received. The touch is in parent coordinates. See `relativelayout` for a discussion on coordinate systems.

**Returns**

bool If True, the dispatching of the touch event will stop. If False, the event will continue to be dispatched to the rest of the widget tree.

**on\_touch\_up(self, touch)**

Receive a touch up event. The touch is in parent coordinates.

See `on_touch_down()` for more information.


## 2.3.22 Button

**See also:**

Material Design spec, Buttons

Material Design spec, Buttons: floating action button

**Buttons allow users to take actions, and make choices, with a single tap.**

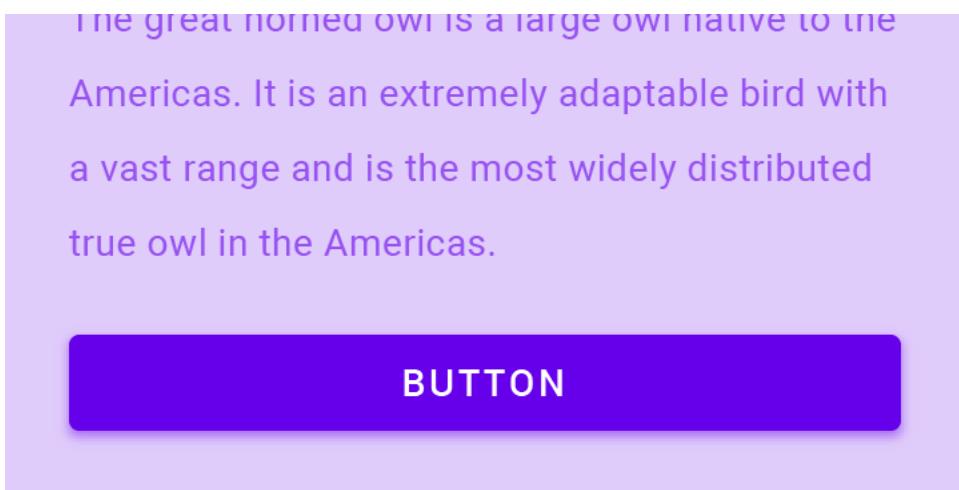

KivyMD provides the following button classes for use:

- `MDIconButton`
- `MDFloatingActionButton`
- `MDFlatButton`
- `MDRaisedButton`
- `MDRectangleFlatButton`
- `MDRectangleFlatIconButton`

- *MDRoundFlatButton*
- *MDRoundFlatIconButton*
- *MDFillRoundFlatButton*
- *MDFillRoundFlatIconButton*
- *MDTextButton*
- *MDFloatingActionButtonSpeedDial*

## MDIconButton

Declarative KV style

```
from kivy.lang import Builder

from kivymd.app import MDApp

KV = '''
MDScreen:

    MDIconButton:
        icon: "language-python"
        pos_hint: {"center_x": .5, "center_y": .5}
'''


class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return Builder.load_string(KV)
```

`Example().run()`

Declarative python style


```
from kivymd.app import MDApp
from kivymd.uix.button import MDIconButton
from kivymd.uix.screen import MDScreen


class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return (
            MDScreen(
                MDIconButton(
                    icon="language-python",
                    pos_hint={"center_x": 0.5, "center_y": 0.5},
                )
            )
        )
```

(continues on next page)

(continued from previous page)


```
)  
)  
  
Example().run()
```

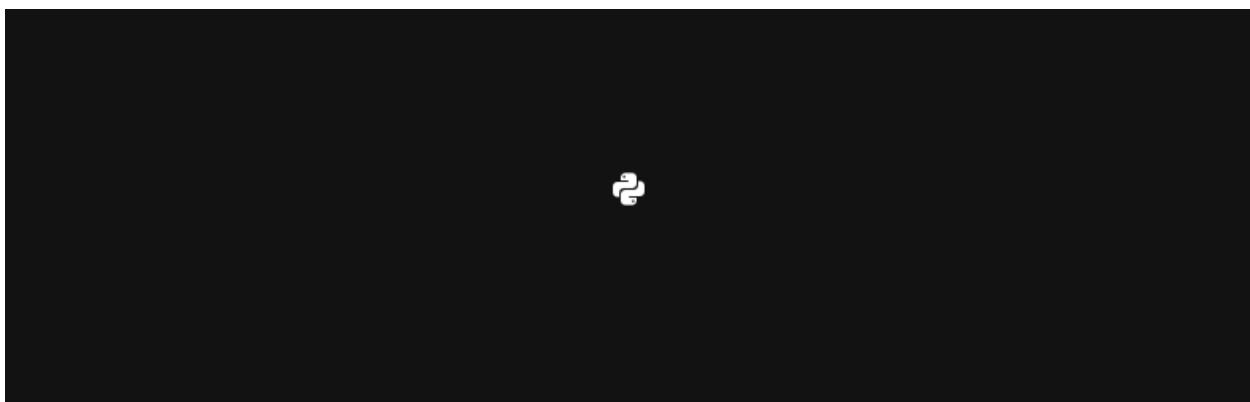

The `icon` parameter must have the name of the icon from `kivymd/icon_definitions.py` file.


You can also use custom icons:

```
MDIconButton:  
    icon: "kivymd/images/logo/kivymd-icon-256.png"
```




By default, `MDIconButton` button has a size (`dp(48), dp(48)`). Use `icon_size` attribute to resize the button:

```
MDIconButton:  
    icon: "android"  
    icon_size: "64sp"
```



By default, the color of `MDIconButton` (depending on the style of the application) is black or white. You can change the color of `MDIconButton` as the text color of `MDLabel`, substituting `theme_icon_color` for `theme_text_color` and `icon_color` for `text_color`.

```
MDIconButton:
    icon: "android"
    theme_icon_color: "Custom"
    icon_color: app.theme_cls.primary_color
```




## MDFloatingActionButton



The above parameters for `MDIconButton` apply to `MDFloatingActionButton`.

To change `MDFloatingActionButton` background, use the `md_bg_color` parameter:

```
MDFloatingActionButton:
    icon: "android"
    md_bg_color: app.theme_cls.primary_color
```

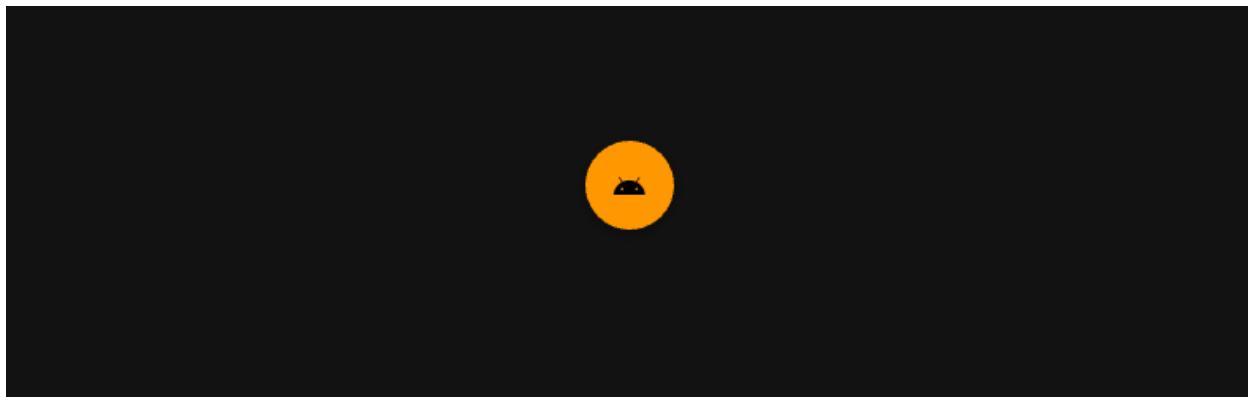

### Material design style 3

```
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.button import MDFloatingActionButton

KV = '''
MDScreen:
    md_bg_color: "#f7f2fa"

    MDBBoxLayout:
        id: box
        spacing: "56dp"
        adaptive_size: True
        pos_hint: {"center_x": .5, "center_y": .5}
    ...
    ...

class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        self.theme_cls.material_style = "M3"
        return Builder.load_string(KV)

    def on_start(self):
        data = {
            "standard": {"md_bg_color": "#fefbff", "text_color": "#6851a5"},
            "small": {"md_bg_color": "#e9dff7", "text_color": "#211c29"},
            "large": {"md_bg_color": "#f8d7e3", "text_color": "#311021"},
        }
        for type_button in data.keys():
            self.root.ids.box.add_widget(
                MDFloatingActionButton(
                    icon="pencil",
                    type=type_button,
                    theme_icon_color="Custom",
                )
            )
'''
```

(continues on next page)


(continued from previous page)

```

        md_bg_color=data[type_button]["md_bg_color"],
        icon_color=data[type_button]["text_color"],
    )
)

```


```
Example().run()
```



## MDFlatButton

To change the text color of: class:~*MDFlatButton* use the `text_color` parameter:

```
MDFlatButton:
    text: "MDFlatButton"
    theme_text_color: "Custom"
    text_color: "orange"
```

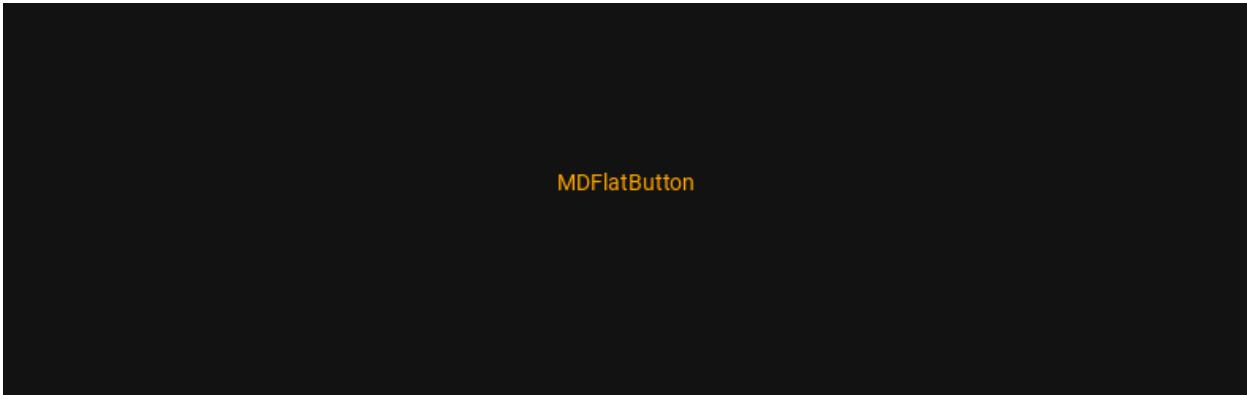

Or use markup:

```
MDFlatButton:
    text: "[color=#00ffcc]MDFlatButton[/color]"
```

To specify the font size and font name, use the parameters as in the usual *Kivy* buttons:

```
MDFFlatButton:
    text: "MDFFlatButton"
    font_size: "18sp"
    font_name: "path/to/font"
```

### MDRaisedButton

This button is similar to the *MDFFlatButton* button except that you can set the background color for *MDRaisedButton*:

```
MDRaisedButton:
    text: "MDRaisedButton"
    md_bg_color: "red"
```



### MDRectangleFlatButton

```
MDRectangleFlatButton:
    text: "MDRectangleFlatButton"
    theme_text_color: "Custom"
    text_color: "white"
    line_color: "red"
```



## MDRectangleFlatButton

Button parameters `MDRectangleFlatButton` are the same as button `MDRectangleFlatButton`, with the addition of the `theme_icon_color` and `icon_color` parameters as for `MDIconButton`.

```
MDRectangleFlatButton:
    icon: "android"
    text: "MDRectangleFlatButton"
    theme_text_color: "Custom"
    text_color: "white"
    line_color: "red"
    theme_icon_color: "Custom"
    icon_color: "orange"
```



### Without border

```
from kivymd.app import MDApp
from kivymd.uix.screen import MDScreen
from kivymd.uix.button import MDRectangleFlatButton

class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return (
            MDScreen(
                MDRectangleFlatButton(
                    text="MDRectangleFlatButton",
                    icon="language-python",
                    line_color=(0, 0, 0, 0),
                    pos_hint={"center_x": .5, "center_y": .5},
                )
            )
        )

Example().run()
```

**MDRectangleFlatButton:**

```
text: "MDRectangleFlatButton"
icon: "language-python"
line_color: 0, 0, 0, 0
pos_hint: {"center_x": .5, "center_y": .5}
```



**MDRoundFlatButton**

**MDRoundFlatButton:**

```
text: "MDRoundFlatButton"
text_color: "white"
```



**MDRoundFlatIconButton**

Button parameters *MDRoundFlatIconButton* are the same as button *MDRoundFlatButton*, with the addition of the *theme\_icon\_color* and *icon\_color* parameters as for *MDIconButton*:

**MDRoundFlatIconButton:**

```
text: "MDRoundFlatIconButton"
icon: "android"
text_color: "white"
```




### MDFillRoundFlatButton



Button parameters `MDFillRoundFlatButton` are the same as button `MDRaisedButton`.

### MDFillRoundFlatIconButton

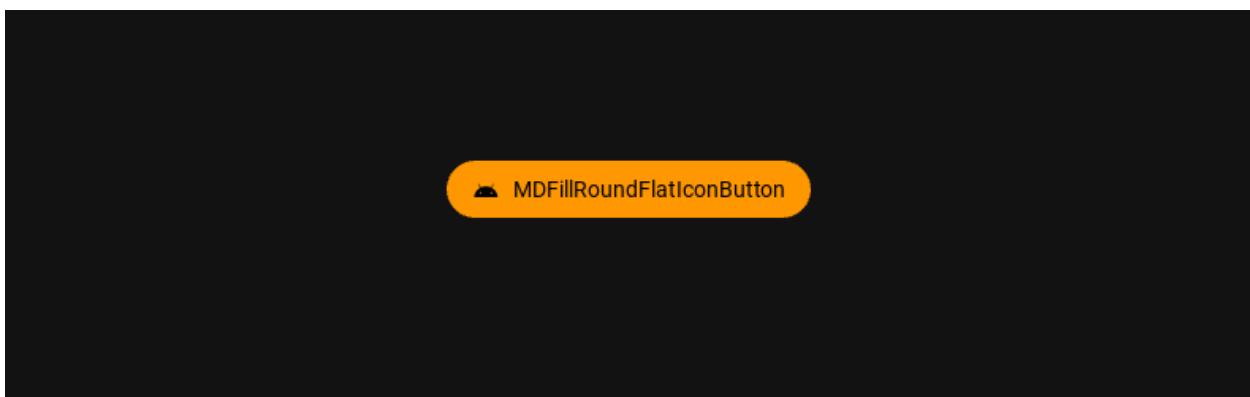

Button parameters `MDFillRoundFlatIconButton` are the same as button `MDRaisedButton`, with the addition of the `theme_icon_color` and `icon_color` parameters as for `MDIconButton`.


---

**Note:** Notice that the width of the `MDFillRoundFlatIconButton` button matches the size of the button text.

---

## MDTextButton

```
MDTextButton:  
    text: "MDTextButton"  
    custom_color: "white"
```

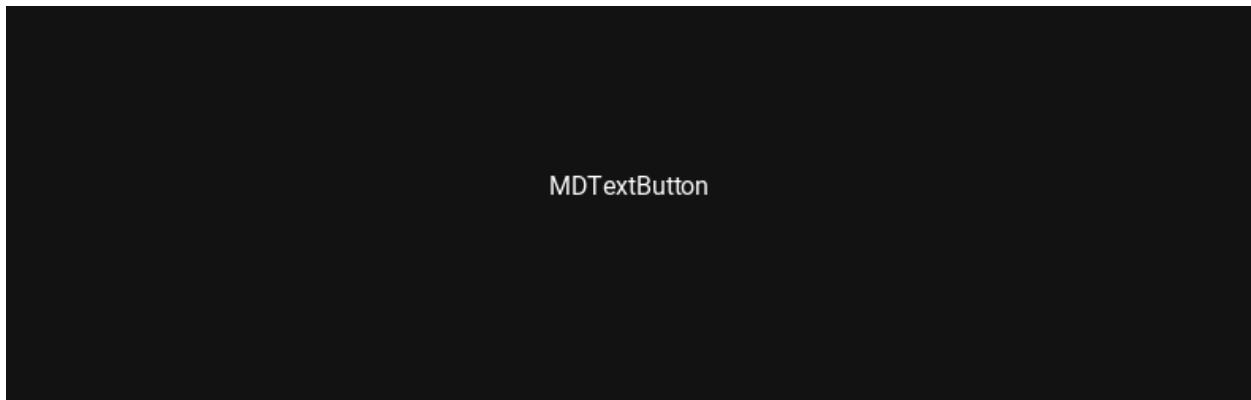

## MDFloatingActionButtonSpeedDial

---

**Note:** See the full list of arguments in the class *MDFloatingActionButtonSpeedDial*.

---

```
from kivy.lang import Builder  
  
from kivymd.app import MDApp  
  
KV = '''  
MDScreen:  
  
    MDFloatingActionButtonSpeedDial:  
        data: app.data  
        root_button_anim: True  
    ...  
  
class Example(MDApp):  
    data = {  
        'Python': 'language-python',  
        'PHP': 'language-php',  
        'C++': 'language-cpp',  
    }  
  
    def build(self):  
        self.theme_cls.theme_style = "Dark"  
        self.theme_cls.primary_palette = "Orange"  
        return Builder.load_string(KV)  
  
Example().run()
```

Or without KV Language:

Imperative python style

```
from kivymd.uix.screen import MDScreen
from kivymd.app import MDApp
from kivymd.uix.button import MDFloatingActionButtonSpeedDial

class Example(MDApp):
    data = {
        'Python': 'language-python',
        'PHP': 'language-php',
        'C++': 'language-cpp',
    }

    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        screen = MDScreen()
        speed_dial = MDFloatingActionButtonSpeedDial()
        speed_dial.data = self.data
        speed_dial.root_button_anim = True
        screen.add_widget(speed_dial)
        return screen

Example().run()
```

Declarative python style

```
from kivymd.uix.screen import MDScreen
from kivymd.app import MDApp
from kivymd.uix.button import MDFloatingActionButtonSpeedDial

class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return (
            MDScreen(
                MDFloatingActionButtonSpeedDial(
                    data={
                        'Python': 'language-python',
                        'PHP': 'language-php',
                        'C++': 'language-cpp',
                    },
                    root_button_anim=True,
                )
            )
        )
```

(continues on next page)

(continued from previous page)

Example().run()

You can use various types of animation of labels for buttons on the stack:

```
MDFloatingActionButtonSpeedDial:  
    hint_animation: True
```

You can set your color values for background, text of buttons etc:

```
MDFloatingActionButtonSpeedDial:  
    hint_animation: True  
    bg_hint_color: app.theme_cls.primary_dark
```



### Binds to individual buttons

Declarative KV style

```
from kivy.lang import Builder  
from kivy.properties import DictProperty  
  
from kivymd.app import MDApp  
  
KV = ''''  
MDScreen:  
  
    MDFloatingActionButtonSpeedDial:  
        id: speed_dial  
        data: app.data  
        root_button_anim: True  
        hint_animation: True  
'''
```

(continues on next page)

(continued from previous page)

```

class Example(MDApp):
    data = DictProperty()

    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        self.data = {
            'Python': 'language-python',
            'JS': [
                'language-javascript',
                "on_press", lambda x: print("pressed JS"),
                "on_release", lambda x: print(
                    "stack_buttons",
                    self.root.ids.speed_dial.stack_buttons
                )
            ],
            'PHP': [
                'language-php',
                "on_press", lambda x: print("pressed PHP"),
                "on_release", self.callback
            ],
            'C++': [
                'language-cpp',
                "on_press", lambda x: print("pressed C++"),
                "on_release", lambda x: self.callback()
            ],
        }
        return Builder.load_string(KV)

    def callback(self, *args):
        print(args)

```

Example().run()

Declarative python style

```

from kivymd.app import MDApp
from kivymd.uix.button import MDFloatingActionButtonSpeedDial
from kivymd.uix.screen import MDScreen

class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return (
            MDScreen(
                MDFloatingActionButtonSpeedDial(
                    id="speed_dial",
                    hint_animation=True,
                    root_button_anim=True,

```

(continues on next page)

(continued from previous page)

```

        )
    )

def on_start(self):
    data = {
        "Python": "language-python",
        "JS": [
            "language-javascript",
            "on_press", lambda x: print("pressed JS"),
            "on_release", lambda x: print(
                "stack_buttons",
                self.root.ids.speed_dial.stack_buttons
            )
        ],
        "PHP": [
            "language-php",
            "on_press", lambda x: print("pressed PHP"),
            "on_release", self.callback
        ],
        "C++": [
            "language-cpp",
            "on_press", lambda x: print("pressed C++"),
            "on_release", lambda x: self.callback()
        ],
    }
    self.root.ids.speed_dial.data = data

def callback(self, *args):
    print(args)

```

Example().run()

**API - kivymd.uix.button.button****class kivymd.uix.button.button.BaseButton(\*args, \*\*kwargs)**

Base class for all buttons.

For more information, see in the [AnchorLayout](#) class documentation.**padding**

Padding between the widget box and its children, in pixels: [padding\_left, padding\_top, padding\_right, padding\_bottom].

padding also accepts a two argument form [padding\_horizontal, padding\_vertical] and a one argument form [padding].

New in version 1.0.0.

*padding* is a [VariableListProperty](#) and defaults to [16dp, 8dp, 16dp, 8dp].**halign**

Horizontal anchor.

New in version 1.0.0.

`anchor_x` is an `OptionProperty` and defaults to ‘center’. It accepts values of ‘left’, ‘center’ or ‘right’.

#### **valign**

Vertical anchor.

New in version 1.0.0.

`anchor_y` is an `OptionProperty` and defaults to ‘center’. It accepts values of ‘top’, ‘center’ or ‘bottom’.

#### **text**

Button text.

`text` is a `StringProperty` and defaults to ‘’.

#### **icon**

Button icon.

`icon` is a `StringProperty` and defaults to ‘’.

#### **font\_style**

Button text font style.

Available vanilla font\_style are: ‘H1’, ‘H2’, ‘H3’, ‘H4’, ‘H5’, ‘H6’, ‘Subtitle1’, ‘Subtitle2’, ‘Body1’, ‘Body2’, ‘Button’, ‘Caption’, ‘Overline’, ‘Icon’.

`font_style` is a `StringProperty` and defaults to ‘Body1’.

#### **theme\_text\_color**

Button text type. Available options are: (“Primary”, “Secondary”, “Hint”, “Error”, “Custom”, “ContrastParentBackground”).

`theme_text_color` is an `OptionProperty` and defaults to `None` (set by button class).

#### **theme\_icon\_color**

Button icon type. Available options are: (“Primary”, “Secondary”, “Hint”, “Error”, “Custom”, “ContrastParentBackground”).

New in version 1.0.0.

`theme_icon_color` is an `OptionProperty` and defaults to `None` (set by button subclass).

#### **text\_color**

Button text color in (r, g, b, a) or string format.

`text_color` is a `ColorProperty` and defaults to `None`.

#### **icon\_color**

Button icon color in (r, g, b, a) or string format.

`icon_color` is a `ColorProperty` and defaults to `None`.

#### **font\_name**

Button text font name.

`font_name` is a `StringProperty` and defaults to ‘’.

#### **font\_size**

Button text font size.

`font_size` is a `NumericProperty` and defaults to `14sp`.

### **icon\_size**

Icon font size. Use this parameter as the font size, that is, in sp units.

New in version 1.0.0.

*icon\_size* is a [NumericProperty](#) and defaults to *None*.

### **line\_width**

Line width for button border.

*line\_width* is a [NumericProperty](#) and defaults to *1*.

### **line\_color**

Line color in (r, g, b, a) or string format for button border.

*line\_color* is a [ColorProperty](#) and defaults to *None*.

### **line\_color\_disabled**

Disabled line color in (r, g, b, a) or string format for button border.

New in version 1.0.0.

*line\_color\_disabled* is a [ColorProperty](#) and defaults to *None*.

### **md\_bg\_color**

Button background color in (r, g, b, a) or string format.

*md\_bg\_color* is a [ColorProperty](#) and defaults to *None*.

### **md\_bg\_color\_disabled**

The background color in (r, g, b, a) or string format of the button when the button is disabled.

*md\_bg\_color\_disabled* is a [ColorProperty](#) and defaults to *None*.

### **disabled\_color**

The color of the text and icon when the button is disabled, in (r, g, b, a) or string format.

New in version 1.0.0.

*disabled\_color* is a [ColorProperty](#) and defaults to *None*.

### **rounded\_button**

Should the button have fully rounded corners (e.g. like M3 buttons)?

New in version 1.0.0.

*rounded\_button* is a [BooleanProperty](#) and defaults to *False*.

### **set\_disabled\_color(self, \*args)**

Sets the color for the icon, text and line of the button when button is disabled.

### **set\_all\_colors(self, \*args)**

Set all button colours.

### **set\_button\_colors(self, \*args)**

Set all button colours (except text/icons).

### **set\_text\_color(self, \*args)**

Set \_theme\_text\_color and \_text\_color based on defaults and options.

### **set\_icon\_color(self, \*args)**

Set \_theme\_icon\_color and \_icon\_color based on defaults and options.

**set\_radius(self, \*args)**

Set the radius, if we are a rounded button, based on the current height.

**on\_touch\_down(self, touch)**

Animates fade to background on press, for buttons with no background color.

**on\_touch\_up(self, touch)**

Animates return to original background on touch release.

**on\_disabled(self, instance\_button, disabled\_value: bool)****class kivymd.uix.button.button.MDFlatButton(\*args, \*\*kwargs)**

A flat rectangular button with (by default) no border or background. Text is the default text color.

**padding**

Padding between the widget box and its children, in pixels: [padding\_left, padding\_top, padding\_right, padding\_bottom].

padding also accepts a two argument form [padding\_horizontal, padding\_vertical] and a one argument form [padding].

New in version 1.0.0.

*padding* is a `VariableListProperty` and defaults to [8dp, 8dp, 8dp, 8dp].

**class kivymd.uix.button.button.MDRaisedButton(\*args, \*\*kwargs)**

A flat button with (by default) a primary color fill and matching color text.

**class kivymd.uix.button.button.MDRectangleFlatButton(\*args, \*\*kwargs)**

A flat button with (by default) a primary color border and primary color text.

**class kivymd.uix.button.button.MDRectangleFlatIconButton(\*args, \*\*kwargs)**

A flat button with (by default) a primary color border, primary color text and a primary color icon on the left.

**class kivymd.uix.button.button.MDRoundFlatButton(\*args, \*\*kwargs)**

A flat button with (by default) fully rounded corners, a primary color border and primary color text.

**class kivymd.uix.button.button.MDRoundFlatIconButton(\*args, \*\*kwargs)**

A flat button with (by default) rounded corners, a primary color border, primary color text and a primary color icon on the left.

**class kivymd.uix.button.button.MDFillRoundFlatButton(\*args, \*\*kwargs)**

A flat button with (by default) rounded corners, a primary color fill and primary color text.

**class kivymd.uix.button.button.MDFillRoundFlatIconButton(\*args, \*\*kwargs)**

A flat button with (by default) rounded corners, a primary color fill, primary color text and a primary color icon on the left.

**class kivymd.uix.button.button.MDIconButton(\*args, \*\*kwargs)**

A simple rounded icon button.

**icon**

Button icon.

*icon* is a `StringProperty` and defaults to ‘checkbox-blank-circle’.

**set\_size(self, interval: Union[int, float])**

Sets the icon width/height based on the current *icon\_size* attribute, or the default value if it is zero. The icon size is set to (48, 48) for an icon with the default font\_size 24sp.

```
class kivymd.uix.button.button.MDFloatingActionButton(*args, **kwargs)
```


Implementation FAB button.

### type

Type of M3 button.

New in version 1.0.0.

Available options are: ‘small’, ‘large’, ‘standard’.

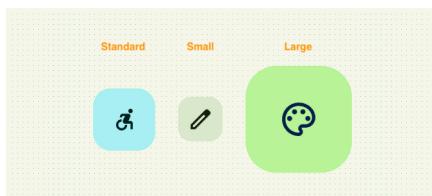

`type` is an [OptionProperty](#) and defaults to ‘standard’.

```
set_font_size(self, *args)
```

```
set_radius(self, *args)
```

```
set_size_and_radius(self, *args)
```

```
set_size(self, *args)
```

```
on_type(self, instance_md_floating_action_button, type: str)
```

```
class kivymd.uix.button.button.MDTextButton(**kwargs)
```

This [mixin](#) class provides [Button](#) behavior. Please see the [button behaviors](#) module documentation for more information.

### Events

#### `on_press`

Fired when the button is pressed.

#### `on_release`

Fired when the button is released (i.e. the touch/click that pressed the button goes away).

### color

Button color in (r, g, b, a) or string format.

`color` is a [ColorProperty](#) and defaults to *None*.

### color\_disabled

Button color disabled in (r, g, b, a) or string format.

`color_disabled` is a [ColorProperty](#) and defaults to *None*.

```
animation_label(self)
```

```
on_press(self, *args)
```

```
on_disabled(self, instance_button, disabled_value)
```

```
class kivymd.uix.button.button.MDFloatingActionButtonSpeedDial(**kwargs)
```

For more information, see in the [FloatLayout](#) class documentation.

### Events

***on\_open***

Called when a stack is opened.

***on\_close***

Called when a stack is closed.

***on\_press\_stack\_button***

Called at the on\_press event for the stack button.

***on\_release\_stack\_button***

Called at the on\_press event for the stack button.

***icon***

Root button icon name.

```
MDFloatingActionButtonSpeedDial:  
    icon: "pencil"
```



*icon* is a `StringProperty` and defaults to '`plus`'.

***anchor***

Stack anchor. Available options are: '`right`'.

*anchor* is a `OptionProperty` and defaults to '`right`'.

***label\_text\_color***

Color of floating text labels in (r, g, b, a) or string format.

```
MDFloatingActionButtonSpeedDial:  
    label_text_color: "orange"
```




`label_text_color` is a `ColorProperty` and defaults to `None`.

#### **label\_bg\_color**

Background color of floating text labels in (r, g, b, a) or string format.

```
MDFloatingActionButtonSpeedDial:  
    label_text_color: "black"  
    label_bg_color: "orange"
```

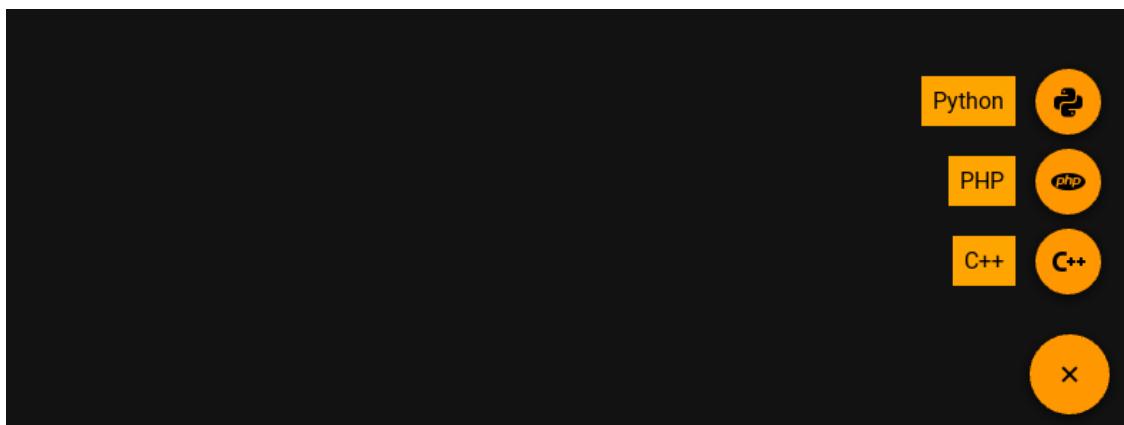

`label_bg_color` is a `ColorProperty` and defaults to `[0, 0, 0, 0]`.

#### **label\_radius**

The radius of the background of floating text labels.

```
MDFloatingActionButtonSpeedDial:  
    label_text_color: "black"  
    label_bg_color: "orange"
```



`label_radius` is a `ColorProperty` and defaults to `[0, 0, 0, 0]`.

### data

Must be a dictionary.

```
{
    'name-icon': 'Text label',
    ...,
    ...
}
```

### right\_pad

If `True`, the background for the floating text label will increase by the number of pixels specified in the `right_pad_value` parameter.

Works only if the `hint_animation` parameter is set to `True`.

### False

```
MDFloatingActionButtonSpeedDial:
    hint_animation: True
    right_pad: False
```

### True

```
MDFloatingActionButtonSpeedDial:
    hint_animation: True
    right_pad: True
    right_pad_value: "10dp"
```

`right_pad` is a `BooleanProperty` and defaults to `False`.

### right\_pad\_value

See `right_pad` parameter for more information.

`right_pad_value` is a `NumericProperty` and defaults to `0`.

**root\_button\_anim**

If True then the root button will rotate 45 degrees when the stack is opened.

*root\_button\_anim* is a `BooleanProperty` and defaults to `False`.

**opening\_transition**

The name of the stack opening animation type.

*opening\_transition* is a `StringProperty` and defaults to ‘`out_cubic`’.

**closing\_transition**

The name of the stack closing animation type.

*closing\_transition* is a `StringProperty` and defaults to ‘`out_cubic`’.

**opening\_transition\_button\_rotation**

The name of the animation type to rotate the root button when opening the stack.

*opening\_transition\_button\_rotation* is a `StringProperty` and defaults to ‘`out_cubic`’.

**closing\_transition\_button\_rotation**

The name of the animation type to rotate the root button when closing the stack.

*closing\_transition\_button\_rotation* is a `StringProperty` and defaults to ‘`out_cubic`’.

**opening\_time**

Time required for the stack to go to: attr:`state` ‘`open`’.

*opening\_time* is a `NumericProperty` and defaults to `0.2`.

**closing\_time**

Time required for the stack to go to: attr:`state` ‘`close`’.

*closing\_time* is a `NumericProperty` and defaults to `0.2`.

**opening\_time\_button\_rotation**

Time required to rotate the root button 45 degrees during the stack opening animation.

*opening\_time\_button\_rotation* is a `NumericProperty` and defaults to `0.2`.

**closing\_time\_button\_rotation**

Time required to rotate the root button 0 degrees during the stack closing animation.

*closing\_time\_button\_rotation* is a `NumericProperty` and defaults to `0.2`.

**state**

Indicates whether the stack is closed or open. Available options are: ‘`close`’, ‘`open`’.

*state* is a `OptionProperty` and defaults to ‘`close`’.

**bg\_color\_root\_button**

Background color of root button in (r, g, b, a) or string format.



`bg_color_root_button` is a `ColorProperty` and defaults to `None`.

#### **bg\_color\_stack\_button**

Background color of the stack buttons in (r, g, b, a) or string format.



`bg_color_stack_button` is a `ColorProperty` and defaults to `None`.

#### **color\_icon\_stack\_button**


The color icon of the stack buttons in (r, g, b, a) or string format.



`color_icon_stack_button` is a `ColorProperty` and defaults to `None`.

#### **color\_icon\_root\_button**

The color icon of the root button in (r, g, b, a) or string format.

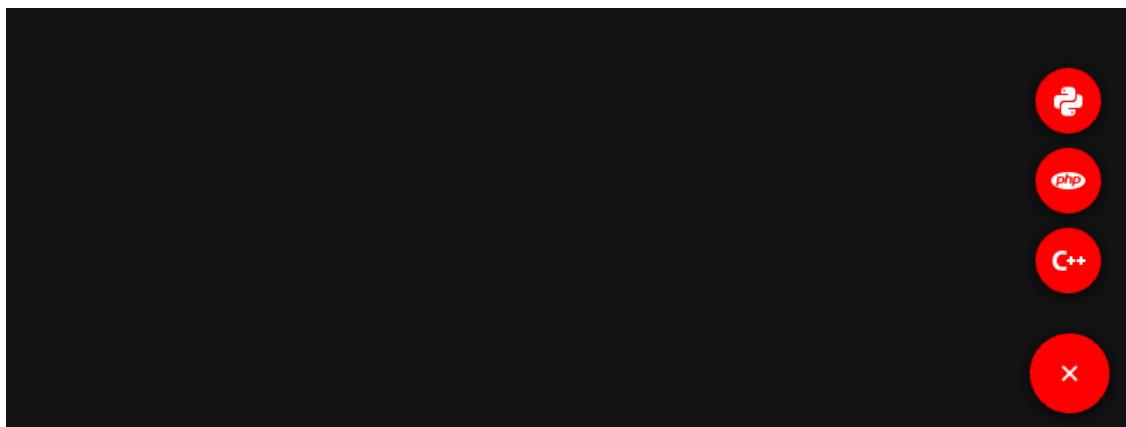

`color_icon_root_button` is a `ColorProperty` and defaults to `None`.

#### **bg\_hint\_color**

Background color for the floating text of the buttons in (r, g, b, a) or string format.



`bg_hint_color` is a `ColorProperty` and defaults to `None`.

#### **hint\_animation**

Whether to use button extension animation to display floating text.

`hint_animation` is a `BooleanProperty` and defaults to `False`.

#### **stack\_buttons**

##### `on_open(self, *args)`

Called when a stack is opened.

##### `on_close(self, *args)`

Called when a stack is closed.

##### `on_leave(self, instance_button: MDFloatingBottomButton)`

Called when the mouse cursor goes outside the button of stack.

##### `on_enter(self, instance_button: MDFloatingBottomButton)`

Called when the mouse cursor is over a button from the stack.

##### `on_data(self, instance_speed_dial, data: dict)`

Creates a stack of buttons.

```
on_icon(self, instance_speed_dial, name_icon: str)
on_label_text_color(self, instance_speed_dial, color: list | str)
on_color_icon_stack_button(self, instance_speed_dial, color: list)
on_hint_animation(self, instance_speed_dial, value: bool)
on_bg_hint_color(self, instance_speed_dial, color: list)
on_color_icon_root_button(self, instance_speed_dial, color: list)
on_bg_color_stack_button(self, instance_speed_dial, color: list)
on_bg_color_root_button(self, instance_speed_dial, color: list)
on_press_stack_button(self, *args)
```

Called at the on\_press event for the stack button.

<b>MDFloatingActionButtonSpeedDial:</b> <b>on_press_stack_button</b> : print(*args)
--

New in version 1.1.0.

```
on_release_stack_button(self, *args)
```

Called at the on\_release event for the stack button.

<b>MDFloatingActionButtonSpeedDial:</b> <b>on_release_stack_button</b> : print(*args)
--

New in version 1.1.0.

```
set_pos_labels(self, instance_floating_label: MDFloatingLabel)
```

Sets the position of the floating labels. Called when the application's root window is resized.

```
set_pos_root_button(self, instance_floating_root_button: MDFloatingRootButton)
```

Sets the position of the root button. Called when the application's root window is resized.

```
set_pos_bottom_buttons(self, instance_floating_bottom_button: MDFloatingBottomButton)
```

Sets the position of the bottom buttons in a stack. Called when the application's root window is resized.

```
open_stack(self, instance_floating_root_button: MDFloatingRootButton)
```

Opens a button stack.

```
do_animation_open_stack(self, anim_data: dict)
```

**Parameters**  
**anim\_data** –

```
{
    <kivymd.uix.button.MDFloatingBottomButton object>:
        <kivy.animation.Animation>,
    <kivymd.uix.button.MDFloatingBottomButton object>:
        <kivy.animation.Animation object>,
    ...
}
```

**close\_stack(self)**

Closes the button stack.

### 2.3.23 BottomSheet

**See also:**

Material Design spec, Sheets: bottom

**Bottom sheets are surfaces containing supplementary content that are anchored to the bottom of the screen.**




Share




Get link

Two classes are available to you `MDListBottomSheet` and `MDGridBottomSheet` for standard bottom sheets dialogs:

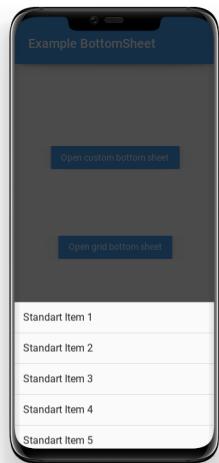

**MDListBottomSheet**

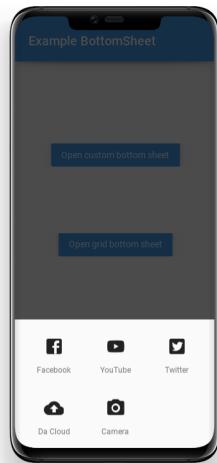

**MDGridBottomSheet**

### Usage MDListBottomSheet

```
from kivy.lang import Builder

from kivymd.toast import toast
from kivymd.uix.bottomsheet import MDListBottomSheet
from kivymd.app import MDApp

KV = '''
MDScreen:

    MDTopAppBar:
        title: "Example BottomSheet"
        pos_hint: {"top": 1}
        elevation: 4

    MDRaisedButton:
        text: "Open list bottom sheet"
        on_release: app.show_example_list_bottom_sheet()
        pos_hint: {"center_x": .5, "center_y": .5}
    ...

class Example(MDApp):
    def build(self):
        return Builder.load_string(KV)

    def callback_for_menu_items(self, *args):
        toast(args[0])

    def show_example_list_bottom_sheet(self):
        bottom_sheet_menu = MDListBottomSheet()
        for i in range(1, 11):
            bottom_sheet_menu.add_item(
                f"Standart Item {i}",
                lambda x, y=i: self.callback_for_menu_items(
                    f"Standart Item {y}"
                ),
            )
        bottom_sheet_menu.open()


Example().run()
```

The `add_item` method of the `MDListBottomSheet` class takes the following arguments:

`text` - element text;

`callback` - function that will be called when clicking on an item;

There is also an optional argument `icon`, which will be used as an icon to the left of the item:



Using the `MDGridBottomSheet` class is similar to using the `MDListBottomSheet` class:

```
from kivy.lang import Builder

from kivymd.toast import toast
from kivymd.uix.bottomsheet import MDGridBottomSheet
from kivymd.app import MDApp

KV = '''
MDScreen:

    MDTopAppBar:
        title: 'Example BottomSheet'
        pos_hint: {"top": 1}
        elevation: 4

    MDRaisedButton:
        text: "Open grid bottom sheet"
        on_release: app.show_example_grid_bottom_sheet()
        pos_hint: {"center_x": .5, "center_y": .5}
'''


class Example(MDApp):
    def build(self):
        return Builder.load_string(KV)

    def callback_for_menu_items(self, *args):
        toast(args[0])

    def show_example_grid_bottom_sheet(self):
        bottom_sheet_menu = MDGridBottomSheet()
        data = {
            "Facebook": "facebook-box",
            "YouTube": "youtube",
            "Twitter": "twitter-box",
            "Da Cloud": "cloud-upload",
            "Camera": "camera",
        }
        for item in data.items():
            bottom_sheet_menu.add_item(
                item[0],
                lambda x, y=item[0]: self.callback_for_menu_items(y),
            )
```

(continues on next page)

(continued from previous page)

```

        icon_src=item[1],
    )
bottom_sheet_menu.open()

```

```
Example().run()
```



You can use custom content for bottom sheet dialogs:

```

from kivy.lang import Builder
from kivy.factory import Factory

from kivymd.uix.bottomsheet import MDCustomBottomSheet
from kivymd.app import MDApp

KV = '''
<ItemForCustomBottomSheet@OneLineIconListItem>
    on_press: app.custom_sheet.dismiss()
    icon: ""

    IconLeftWidget:
        icon: root.icon

<ContentCustomSheet@BoxLayout>:
    orientation: "vertical"
    size_hint_y: None
    height: "400dp"

    MDTopAppBar:
        title: 'Custom bottom sheet:'

    ScrollView:

        MDGridLayout:
            cols: 1
            adaptive_height: True

        ItemForCustomBottomSheet:
            icon: "page-previous"
            text: "Preview"

```

(continues on next page)

(continued from previous page)

```

ItemForCustomBottomSheet:
    icon: "exit-to-app"
    text: "Exit"

MDScreen:

MDTopAppBar:
    title: 'Example BottomSheet'
    pos_hint: {"top": 1}
    elevation: 4

MDRaisedButton:
    text: "Open custom bottom sheet"
    on_release: app.show_example_custom_bottom_sheet()
    pos_hint: {"center_x": .5, "center_y": .5}
...
```


class Example(MDApp):
    custom_sheet = None

    def build(self):
        return Builder.load_string(KV)

    def show_example_custom_bottom_sheet(self):
        self.custom_sheet = MDCustomBottomSheet(screen=Factory.ContentCustomSheet())
        self.custom_sheet.open()

Example().run()

```



**Note:** When you use the `MDCustomBottomSheet` class, you must specify the height of the user-defined content exactly, otherwise `dp(100)` heights will be used for your `ContentCustomSheet` class:

```

<ContentCustomSheet@BoxLayout>:
    orientation: "vertical"
    size_hint_y: None
    height: "400dp"

```

---

**Note:** The height of the bottom sheet dialog will never exceed half the height of the screen!

---

## API - kivymd.uix.bottomsheet.bottomsheet

```
class kivymd.uix.bottomsheet.bottomsheet.MDBottomSheet(**kwargs)
```

ModalView class. See module documentation for more information.

### Events

#### *on\_pre\_open:*

Fired before the ModalView is opened. When this event is fired ModalView is not yet added to window.

#### *on\_open:*

Fired when the ModalView is opened.

#### *on\_pre\_dismiss:*

Fired before the ModalView is closed.

#### *on\_dismiss:*

Fired when the ModalView is closed. If the callback returns True, the dismiss will be canceled.

Changed in version 1.11.0: Added events *on\_pre\_open* and *on\_pre\_dismiss*.

Changed in version 2.0.0: Added property ‘overlay\_color’.

Changed in version 2.1.0: Marked *attach\_to* property as deprecated.

### background

Private attribute.

### duration\_opening

The duration of the bottom sheet dialog opening animation.

*duration\_opening* is an [NumericProperty](#) and defaults to *0.15*.

### duration\_closing

The duration of the bottom sheet dialog closing animation.

*duration\_closing* is an [NumericProperty](#) and defaults to *0.15*.


### radius

The value of the rounding of the corners of the dialog.

*radius* is an [NumericProperty](#) and defaults to *25*.

### radius\_from

Sets which corners to cut from the dialog. Available options are: (“*top\_left*”, “*top\_right*”, “*top*”, “*bottom\_right*”, “*bottom\_left*”, “*bottom*”).

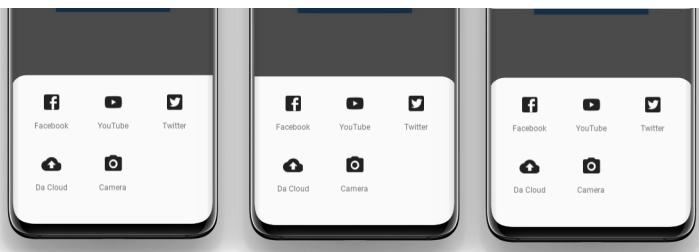

*radius\_from* is an [OptionProperty](#) and defaults to *None*.

### animation

Whether to use animation for opening and closing of the bottomsheet or not.

*animation* is an [BooleanProperty](#) and defaults to *False*.

### bg\_color

Dialog background color in in (r, g, b, a) or string format.

*bg\_color* is an [ColorProperty](#) and defaults to *[]*.

### value\_transparent

Background color in (r, g, b, a) or string format transparency value when opening a dialog.

*value\_transparent* is an [ColorProperty](#) and defaults to *[0, 0, 0, 0.8]*.

### open(self, \*args)

Display the modal in the Window.

When the view is opened, it will be faded in with an animation. If you don't want the animation, use:

```
view.open(animation=False)
```

### add\_widget(self, widget, index=0, canvas=None)

Add a new widget as a child of this widget.

#### Parameters

##### *widget: Widget*

Widget to add to our list of children.

##### *index: int, defaults to 0*

Index to insert the widget in the list. Notice that the default of 0 means the widget is inserted at the beginning of the list and will thus be drawn on top of other sibling widgets. For a full discussion of the index and widget hierarchy, please see the Widgets Programming Guide.

New in version 1.0.5.

##### *canvas: str, defaults to None*

Canvas to add widget's canvas to. Can be 'before', 'after' or None for the default canvas.

New in version 1.9.0.

```
>>> from kivy.uix.button import Button
>>> from kivy.uix.slider import Slider
>>> root = Widget()
>>> root.add_widget(Button())
```

(continues on next page)

(continued from previous page)

```
>>> slider = Slider()
>>> root.add_widget(slider)
```

**dismiss(self, \*args, \*\*kwargs)**

Close the view if it is open.

If you really want to close the view, whatever the `on_dismiss` event returns, you can use the `force` keyword argument:

```
view = ModalView()
view.dismiss(force=True)
```

When the view is dismissed, it will be faded out before being removed from the parent. If you don't want this animation, use:

```
view.dismiss(animation=False)
```

**resize\_content\_layout(self, content, layout, interval=0)**

**class kivymd.uix.bottomsheet.bottomsheet.MDCustomBottomSheet(\*\*kwargs)**

ModalView class. See module documentation for more information.

**Events*****on\_pre\_open:***

Fired before the ModalView is opened. When this event is fired ModalView is not yet added to window.

***on\_open:***

Fired when the ModalView is opened.

***on\_pre\_dismiss:***

Fired before the ModalView is closed.

***on\_dismiss:***

Fired when the ModalView is closed. If the callback returns True, the dismiss will be canceled.

Changed in version 1.11.0: Added events `on_pre_open` and `on_pre_dismiss`.

Changed in version 2.0.0: Added property ‘`overlay_color`’.

Changed in version 2.1.0: Marked `attach_to` property as deprecated.

**screen**

Custom content.

`screen` is an `ObjectProperty` and defaults to `None`.

**class kivymd.uix.bottomsheet.bottomsheet.MDListBottomSheet(\*\*kwargs)**

ModalView class. See module documentation for more information.

**Events*****on\_pre\_open:***

Fired before the ModalView is opened. When this event is fired ModalView is not yet added to window.

***on\_open:***

Fired when the ModalView is opened.

***on\_pre\_dismiss:***

Fired before the ModalView is closed.

***on\_dismiss:***

Fired when the ModalView is closed. If the callback returns True, the dismiss will be canceled.

Changed in version 1.11.0: Added events *on\_pre\_open* and *on\_pre\_dismiss*.

Changed in version 2.0.0: Added property ‘overlay\_color’.

Changed in version 2.1.0: Marked *attach\_to* property as deprecated.

**`sheet_list`**

`sheet_list` is an `ObjectProperty` and defaults to `None`.

`add_item(self, text, callback, icon=None)`

**Parameters**

- **text** – element text;
- **callback** – function that will be called when clicking on an item;
- **icon** – which will be used as an icon to the left of the item;

`class kivymd.uix.bottomsheet.bottomsheet.GridBottomSheetItem(**kwargs)`

This `mixin` class provides `Button` behavior. Please see the `button behaviors` module documentation for more information.

**Events**

***on\_press***

Fired when the button is pressed.

***on\_release***

Fired when the button is released (i.e. the touch/click that pressed the button goes away).

**`source`**

Icon path if you use a local image or icon name if you use icon names from a file `kivymd/icon_definitions.py`.

`source` is an `StringProperty` and defaults to ‘’.

**`caption`**

Item text.

`caption` is an `StringProperty` and defaults to ‘’.

**`icon_size`**

Icon size.

`caption` is an `StringProperty` and defaults to ‘24sp’.

`class kivymd.uix.bottomsheet.bottomsheet.MDGridBottomSheet(**kwargs)`

ModalView class. See module documentation for more information.

**Events**

***on\_pre\_open:***

Fired before the ModalView is opened. When this event is fired ModalView is not yet added to window.

***on\_open:***

Fired when the ModalView is opened.

***on\_pre\_dismiss:***

Fired before the ModalView is closed.

***on\_dismiss:***

Fired when the ModalView is closed. If the callback returns True, the dismiss will be canceled.

Changed in version 1.11.0: Added events *on\_pre\_open* and *on\_pre\_dismiss*.

Changed in version 2.0.0: Added property ‘overlay\_color’.

Changed in version 2.1.0: Marked *attach\_to* property as deprecated.

**`add_item(self, text, callback, icon_src)`**

**Parameters**

- **text** – element text;
- **callback** – function that will be called when clicking on an item;
- **icon\_src** – icon item;

### 2.3.24 SliverAppbar

New in version 1.0.0.

**MDSliverAppbar** is a Material Design widget in KivyMD which gives scrollable or collapsible MD-TopAppBar

---

**Note:** This widget is a modification of the `silverappbar.py` module.

---

#### Usage

**MDScreen:**


**MDSliverAppbar:**

**MDSliverAppbarHeader:**

# Custom content.  
...

# Custom list.

**MDSliverAppbarContent:**

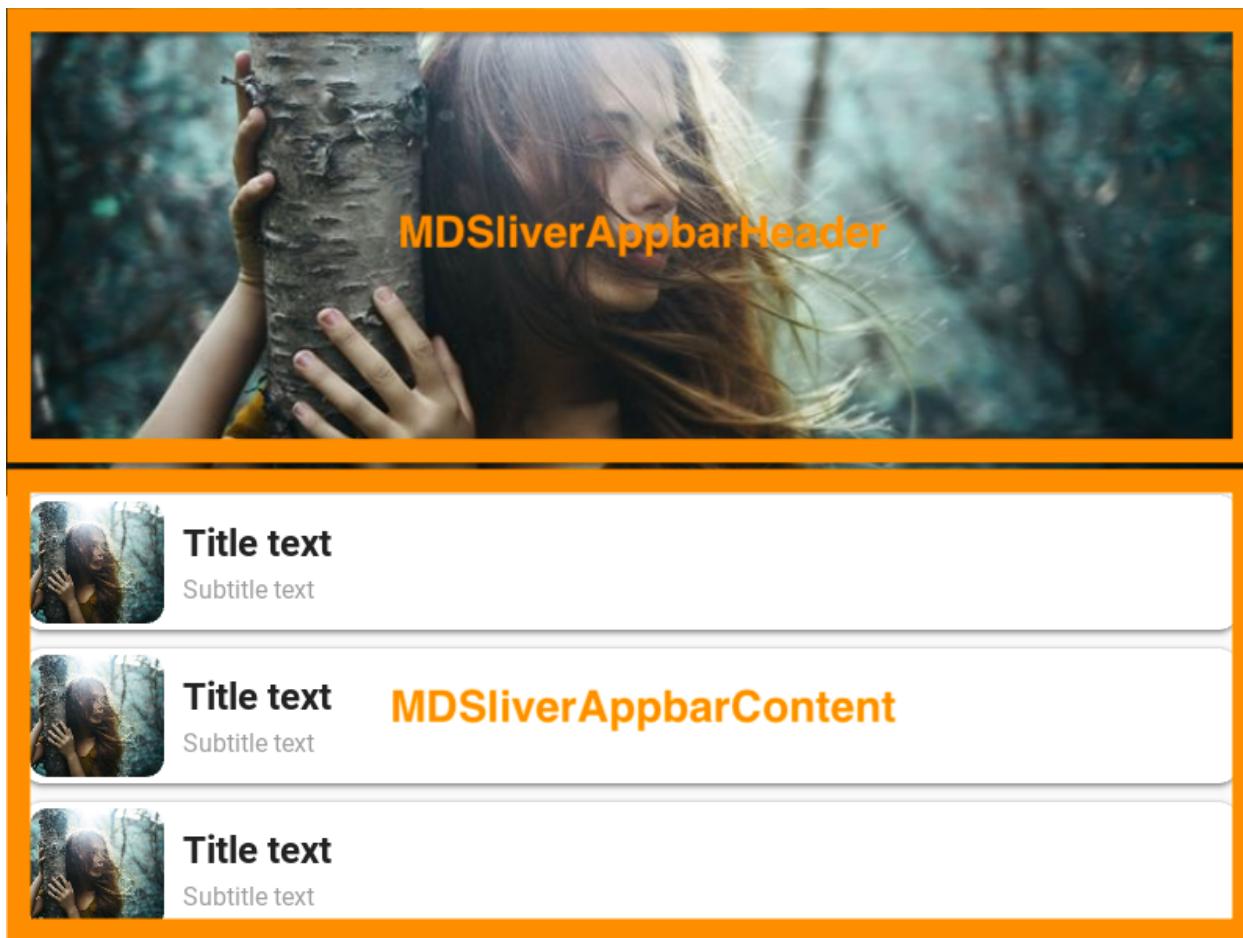

## Example

```
from kivy.lang.builder import Builder

from kivymd.app import MDApp
from kivymd.uix.card import MDCard

KV = '''
<CardItem>
    size_hint_y: None
    height: "86dp"
    padding: "4dp"
    radius: 12

    FitImage:
        source: "avatar.jpg"
        radius: root.radius
        size_hint_x: None
        width: root.height

    MDBBoxLayout:
```

(continues on next page)

(continued from previous page)

```

orientation: "vertical"
adaptive_height: True
spacing: "6dp"
padding: "12dp", 0, 0, 0
pos_hint: {"center_y": .5}

MDLabel:
    text: "Title text"
    font_style: "H5"
    bold: True
    adaptive_height: True

MDLabel:
    text: "Subtitle text"
    theme_text_color: "Hint"
    adaptive_height: True

MDScreen:

    MDSliverAppbar:
        background_color: "2d4a50"

        MDSliverAppbarHeader:

            MDRelativeLayout:

                FitImage:
                    source: "bg.jpg"

        MDSliverAppbarContent:
            id: content
            orientation: "vertical"
            padding: "12dp"
            spacing: "12dp"
            adaptive_height: True
    ...

class CardItem(MDCard):
    def __init__(self, *args, **kwargs):
        super().__init__(*args, **kwargs)
        self.elevation = 3

class Example(MDApp):
    def build(self):
        return Builder.load_string(KV)

    def on_start(self):
        for x in range(10):
            self.root.ids.content.add_widget(CardItem())

```

(continues on next page)

(continued from previous page)

```
Example().run()
```

## API - kivymd.uix.sliverappbar.sliverappbar

```
class kivymd.uix.sliverappbar.sliverappbar.MDSliverAppBarContent(**kwargs)
```

Implements a box for a scrollable list of custom items.

### md\_bg\_color

See *background\_color*.

*md\_bg\_color* is an `ColorProperty` and defaults to [0, 0, 0, 0].

```
set_bg_color(self, interval: Union[int, float])
```

```
class kivymd.uix.sliverappbar.sliverappbar.MDSliverAppBarHeader(*args, **kwargs)
```

Box layout class.

For more information, see in the `BoxLayout` class documentation.

```
class kivymd.uix.sliverappbar.sliverappbar.MDSliverAppBar(*args, **kwargs)
```

MDSliverAppBar class. See module documentation for more information.

## Events

### on\_scroll\_content

Called when the list of custom content is being scrolled.

### toolbar\_cls

Must be an object of the `MDTopAppBar` class documentation for more information.

By default, MDSliverAppBar widget uses the `MDTopAppBar` class with no parameters.

```
from kivy.lang.builder import Builder

from kivymd.uix.card import MDCard
from kivymd.uix.toolbar import MDTopAppBar

KV = '''
#:import SliverToolbar __main__.SliverToolbar


<CardItem>
    size_hint_y: None
    height: "86dp"
    padding: "4dp"
    radius: 12

    FitImage:
        source: "avatar.jpg"
        radius: root.radius
        size_hint_x: None
        width: root.height
```

(continues on next page)

(continued from previous page)

```

MDBBoxLayout:
    orientation: "vertical"
    adaptive_height: True
    spacing: "6dp"
    padding: "12dp", 0, 0, 0
    pos_hint: {"center_y": .5}

MDLabel:
    text: "Title text"
    font_style: "H5"
    bold: True
    adaptive_height: True

MDLabel:
    text: "Subtitle text"
    theme_text_color: "Hint"
    adaptive_height: True

MDScreen:

MDSliverAppbar:
    background_color: "2d4a50"
    toolbar_cls: SliverToolbar()

MDSliverAppbarHeader:

MDRelativeLayout:

    FitImage:
        source: "bg.jpg"

MDSliverAppbarContent:
    id: content
    orientation: "vertical"
    padding: "12dp"
    spacing: "12dp"
    adaptive_height: True
    ...

class CardItem(MDCard):
    def __init__(self, *args, **kwargs):
        super().__init__(*args, **kwargs)
        self.elevation = 3

class SliverToolbar(MDTopAppBar):
    def __init__(self, **kwargs):
        super().__init__(**kwargs)
        self.shadow_color = (0, 0, 0, 0)

```

(continues on next page)

(continued from previous page)

```

        self.type_height = "medium"
        self.headline_text = "Headline medium"
        self.left_action_items = [["arrow-left", lambda x: x]]
        self.right_action_items = [
            ["attachment", lambda x: x],
            ["calendar", lambda x: x],
            ["dots-vertical", lambda x: x],
        ]

class Example(MDApp):
    def build(self):
        self.theme_cls.material_style = "M3"
        return Builder.load_string(KV)

    def on_start(self):
        for x in range(10):
            self.root.ids.content.add_widget(CardItem())

Example().run()

```

`toolbar_cls` is an `ObjectProperty` and defaults to `None`.


#### **background\_color**

Background color of toolbar in (r, g, b, a) or string format.

```

MDSliverAppbar:
    background_color: "2d4a50"

```

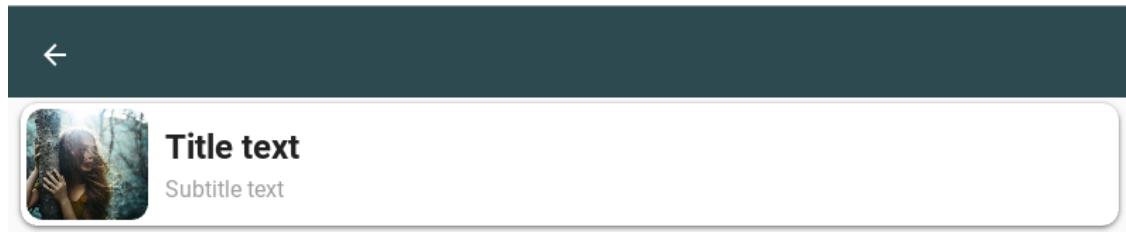

`background_color` is an `ColorProperty` and defaults to `None`.


#### **max\_height**

Distance from top of screen to start of custom list content.

```

MDSliverAppbar:
    max_height: "200dp"

```

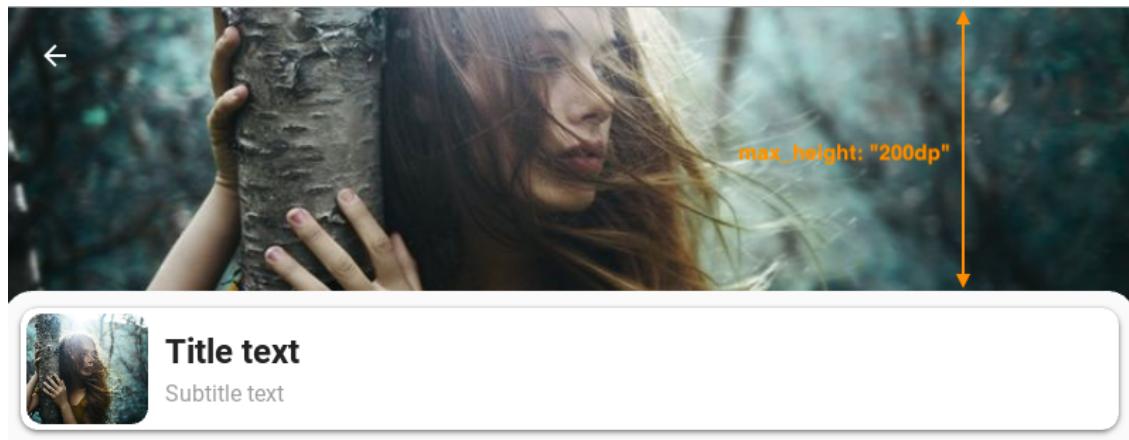

*max\_height* is an [NumericProperty](#) and defaults to *Window.height / 2*.

#### hide\_toolbar

Whether to hide the toolbar when scrolling through a list of custom content.


```
MDSliverAppbar:
    hide_toolbar: False
```

*hide\_toolbar* is an [BooleanProperty](#) and defaults to *True*.

#### radius

Box radius for custom item list.

```
MDSliverAppbar:
    radius: 20
```

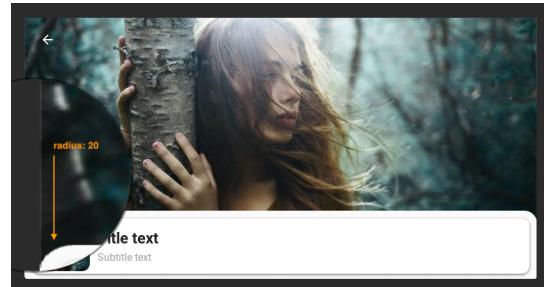

*radius* is an [VariableListProperty](#) and defaults to [20].

#### max\_opacity

Maximum background transparency value for the [MDSliverAppbarHeader](#) class.

```
MDSliverAppbar:
    max_opacity: .5
```

*max\_opacity* is an [NumericProperty](#) and defaults to 1.

**on\_scroll\_content**(*self*, *instance\_sliverappbar*: *object* = *None*, *value*: *float* = 1.0, *direction*: *str* = 'up')

Called when the list of custom content is being scrolled.

#### Parameters

- **instance\_sliverappbar** – *MDSliverAppBar*
- **value** – see *scroll\_y*
- **direction** – scroll direction: ‘up/down’

**on\_background\_color**(*self*, *instance\_sliver\_appbar*, *color\_value*: *list*)

**on\_toolbar\_cls**(*self*, *instance\_sliver\_appbar*, *instance\_toolbar\_cls*: *MDTopAppBar*)

Called when a value is set to the *toolbar\_cls* parameter.

**on\_vbar**(*self*)

**get\_default\_toolbar**(*self*)

Called if no value is passed for the toolbar\_cls attribute.

**add\_widget**(*self*, *widget*, *index*=0, *canvas*=*None*)

Add a new widget as a child of this widget.

#### Parameters

**widget: Widget**

Widget to add to our list of children.

**index: int, defaults to 0**

Index to insert the widget in the list. Notice that the default of 0 means the widget is inserted at the beginning of the list and will thus be drawn on top of other sibling widgets. For a full discussion of the index and widget hierarchy, please see the Widgets Programming Guide.

New in version 1.0.5.

**canvas: str, defaults to None**

Canvas to add widget’s canvas to. Can be ‘before’, ‘after’ or None for the default canvas.

New in version 1.9.0.


```
>>> from kivy.uix.button import Button
>>> from kivy.uix.slider import Slider
>>> root = Widget()
>>> root.add_widget(Button())
>>> slider = Slider()
>>> root.add_widget(slider)
```

## 2.3.25 Backdrop

**See also:**

Material Design spec, Backdrop

**Skeleton layout for using MDBBackdrop:**

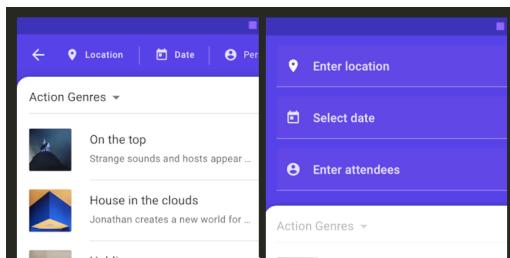

## Usage

<Root>

MDBBackdrop:

MDBBackdropBackLayer:

ContentForBackdropBackLayer:

MDBBackdropFrontLayer:

ContentForBackdropFrontLayer:

## Example

Declarative KV styles

```
from kivy.lang import Builder

from kivymd.uix.screen import MDScreen
from kivymd.app import MDApp

# Your layouts.
Builder.load_string(
    """
#:import os os
#:import Window kivy.core.window.Window
#:import IconLeftWidget kivymd.uix.list.IconLeftWidget
#:import images_path kivymd.images_path
```

(continues on next page)

(continued from previous page)

```
<ItemBackdropFrontLayer@TwoLineAvatarListItem>
    icon: "android"

    IconLeftWidget:
        icon: root.icon


<MyBackdropFrontLayer@ItemBackdropFrontLayer>
    backdrop: None
    text: "Lower the front layer"
    secondary_text: " by 50 %"
    icon: "transfer-down"
    on_press: root.backdrop.open(-Window.height / 2)
    pos_hint: {"top": 1}
    _no_ripple_effect: True


<MyBackdropBackLayer@Image>
    size_hint: .8, .8
    source: os.path.join(images_path, "logo", "kivymd-icon-512.png")
    pos_hint: {"center_x": .5, "center_y": .6}
...
)

# Usage example of MDBBackdrop.
Builder.load_string(
    ...
<ExampleBackdrop>

    MDBBackdrop:
        id: backdrop
        left_action_items: [['menu', lambda x: self.open()]]
        title: "Example Backdrop"
        radius_left: "25dp"
        radius_right: "0dp"
        header_text: "Menu:"

        MDBBackdropBackLayer:
            MyBackdropBackLayer:
                id: backlayer

        MDBBackdropFrontLayer:
            MyBackdropFrontLayer:
                backdrop: backdrop
...
)

class ExampleBackdrop(MDScreen):
    pass
```

(continues on next page)

(continued from previous page)

```
class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return ExampleBackdrop()
```

```
Example().run()
```

Declarative python styles

```
import os

from kivy.core.window import Window
from kivy.uix.image import Image

from kivymd import images_path
from kivymd.uix.backdrop import MDBackdrop
from kivymd.uix.backdrop.backdrop import (
    MDBackdropBackLayer, MDBackdropFrontLayer
)
from kivymd.uix.list import TwoLineAvatarListItem, IconLeftWidget
from kivymd.uix.screen import MDScreen
from kivymd.app import MDApp


class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"

        return (
            MDScreen(
                MDBackdrop(
                    MDBackdropBackLayer(
                        Image(
                            size_hint=(0.8, 0.8),
                            source=os.path.join(images_path, "logo", "kivymd-icon-512.png"),
                            pos_hint={"center_x": 0.5, "center_y": 0.6},
                        )
                    ),
                    MDBackdropFrontLayer(
                        TwoLineAvatarListItem(
                            IconLeftWidget(icon="transfer-down"),
                            text="Lower the front layer",
                            secondary_text=" by 50 %",
                            on_press=self.backdrop_open_by_50_percent,
                            pos_hint={"top": 1},
                            _no_ripple_effect=True,
                        ),
                    ),
                ),
            )
        )
```

(continues on next page)

(continued from previous page)

```

        id="backdrop",
        title="Example Backdrop",
        radius_left="25dp",
        radius_right="0dp",
        header_text="Menu:",
    )
)
)

def backdrop_open_by_50_percent(self, *args):
    self.root.ids.backdrop.open(-Window.height / 2)

```

Example().run()

**Note:** See full example**API - kivymd.uix.backdrop.backdrop****class kivymd.uix.backdrop.backdrop(\*args, \*\*kwargs)****Events*****on\_open***


When the front layer drops.

***on\_close***


When the front layer rises.

***anchor\_title***Position toolbar title. Only used with *material\_style* = 'M3' Available options are: 'left', 'center', 'right'.

New in version 1.0.0.

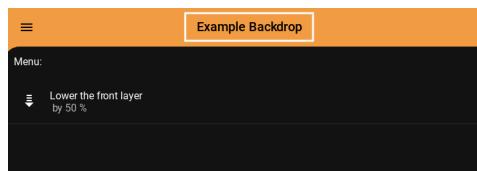*anchor\_title* is an `OptionProperty` and defaults to 'left'.***padding***

Padding for contents of the front layer.

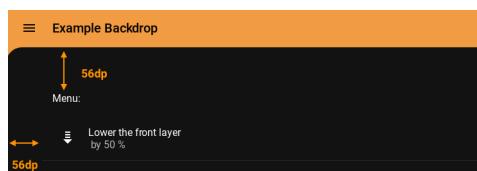

*padding* is an `ListProperty` and defaults to `[0, 0, 0, 0]`.

#### **left\_action\_items**

The icons and methods left of the `kivymd.uix.toolbar.MDTopAppBar` in back layer. For more information, see the `kivymd.uix.toolbar.MDTopAppBar` module and `left_action_items` parameter.

*left\_action\_items* is an `ListProperty` and defaults to `[]`.

#### **right\_action\_items**

Works the same way as `left_action_items`.

*right\_action\_items* is an `ListProperty` and defaults to `[]`.


#### **title**

See the `kivymd.uix.toolbar.MDTopAppBar.title` parameter.

*title* is an `StringProperty` and defaults to `''`.

#### **back\_layer\_color**

Background color of back layer in (r, g, b, a) or string format.

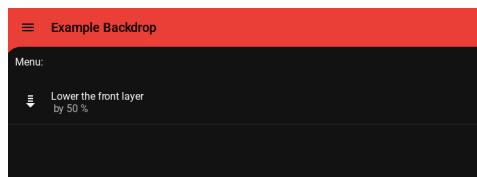

*back\_layer\_color* is an `ColorProperty` and defaults to `None`.

#### **front\_layer\_color**


Background color of front layer in (r, g, b, a) or string format.



*front\_layer\_color* is an `ColorProperty` and defaults to `None`.

#### **radius\_left**

The value of the rounding radius of the upper left corner of the front layer.

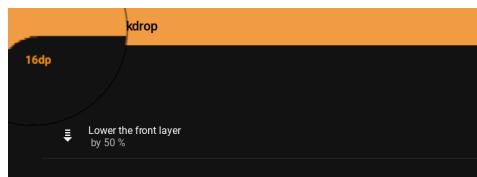

*radius\_left* is an `NumericProperty` and defaults to `16dp`.


#### **radius\_right**

The value of the rounding radius of the upper right corner of the front layer.

*radius\_right* is an `NumericProperty` and defaults to `16dp`.

### header


Whether to use a header above the contents of the front layer.

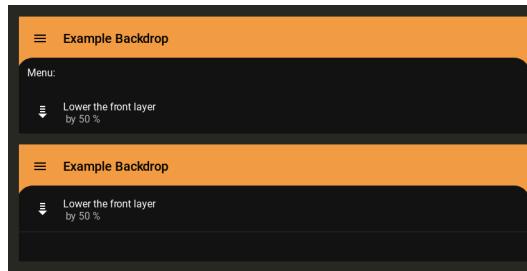

`header` is an `BooleanProperty` and defaults to `True`.

### header\_text

Text of header.

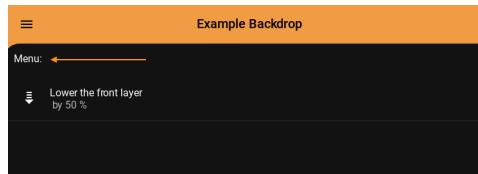

`header_text` is an `StringProperty` and defaults to '`'Header'`'.

### close\_icon

The name of the icon that will be installed on the toolbar on the left when opening the front layer.



`close_icon` is an `StringProperty` and defaults to '`'close'`'.

### opening\_time

The time taken for the panel to slide to the state '`'open'`'.

New in version 1.0.0.

`opening_time` is a `NumericProperty` and defaults to `0.2`.

### opening\_transition

The name of the animation transition type to use when animating to the state '`'open'`'.

New in version 1.0.0.

`opening_transition` is a `StringProperty` and defaults to '`'out_quad'`'.

### closing\_time

The time taken for the panel to slide to the state '`'close'`'.

New in version 1.0.0.

`closing_time` is a `NumericProperty` and defaults to `0.2`.

### closing\_transition

The name of the animation transition type to use when animating to the state '`'close'`'.

New in version 1.0.0.

`closing_transition` is a `StringProperty` and defaults to '`'out_quad'`'.

**on\_open(self)**

When the front layer drops.

**on\_close(self)**

When the front layer rises.

**on\_left\_action\_items(self, instance\_backdrop, menu: list)****on\_header(self, instance\_backdrop, value: bool)****open(self, open\_up\_to: int = 0)**

Opens the front layer.

**Open\_up\_to**

the height to which the front screen will be lowered; if equal to zero - falls to the bottom of the screen;

**close(self)**

Opens the front layer.

**animate\_opacity\_icon(self, instance\_icon\_menu: Union[ActionTopAppBarButton, None] = None, opacity\_value: int = 0, call\_set\_new\_icon: bool = True)**

Starts the opacity animation of the icon.

**set\_new\_icon(self, instance\_animation: Animation, instance\_icon\_menu: ActionTopAppBarButton)**

Sets the icon of the button depending on the state of the backdrop.

**add\_widget(self, widget, index=0, canvas=None)**

Add a new widget as a child of this widget.

**Parameters****widget: Widget**

Widget to add to our list of children.

**index: int, defaults to 0**

Index to insert the widget in the list. Notice that the default of 0 means the widget is inserted at the beginning of the list and will thus be drawn on top of other sibling widgets. For a full discussion of the index and widget hierarchy, please see the Widgets Programming Guide.

New in version 1.0.5.

**canvas: str, defaults to None**

Canvas to add widget's canvas to. Can be 'before', 'after' or None for the default canvas.

New in version 1.9.0.

```
>>> from kivy.uix.button import Button
>>> from kivy.uix.slider import Slider
>>> root = Widget()
>>> root.add_widget(Button())
>>> slider = Slider()
>>> root.add_widget(slider)
```

**class kivymd.uix.backdrop.backdrop.MDBackdropToolbar(\*\*kwargs)**

Implements a toolbar for back content.

```
class kivymd.uix.backdrop.backdrop.MDBackdropFrontLayer(*args, **kwargs)
    Container for front content.

class kivymd.uix.backdrop.backdrop.MDBackdropBackLayer(*args, **kwargs)
    Container for back content.
```


### 2.3.26 Toolbar

#### See also:

Material Design spec, App bars: top

Material Design spec, App bars: bottom

Material Design 3 spec, App bars: bottom

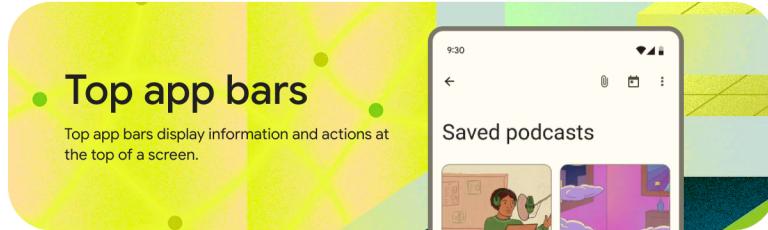

KivyMD provides the following toolbar positions for use:

- *Top*
- *Bottom*

#### Top

```
from kivy.lang import Builder

from kivymd.app import MDApp

KV = '''
MDBoxLayout:
    orientation: "vertical"

    MDTopAppBar:
        title: "MDTopAppBar"

    MDLabel:
        text: "Content"
        halign: "center"
    ...


class Test(MDApp):
    def build(self):
```

(continues on next page)

(continued from previous page)

```
    return Builder.load_string(KV)
```

```
Test().run()
```

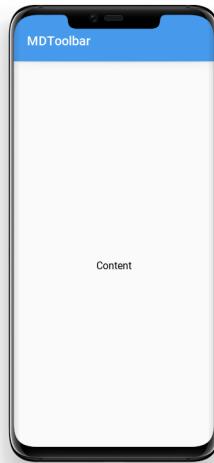

### Add left menu

```
MDTopAppBar:  
    title: "MDTopAppBar"  
    left_action_items: [[{"menu", lambda x: app.callback()}]]
```

A blue horizontal bar representing an MDToolbar. On the left side, there is a button labeled "menu" and on the right side, there are three vertical dots.

**Note:** The callback is optional. `left_action_items: [[{"menu"}]]` would also work for a button that does nothing.

### Add right menu

```
MDTopAppBar:  
    title: "MDTopAppBar"  
    right_action_items: [{"dots-vertical", lambda x: app.callback()}]]
```

A blue horizontal bar representing an MDToolbar. On the left side, there is a button labeled "dots-vertical" and on the right side, there are three vertical dots.

### Add two item to the right menu

```
MDTopAppBar:  
    title: "MDTopAppBar"  
    right_action_items: [{"dots-vertical": lambda x: app.callback_1()}, {"clock": lambda x: app.callback_2()}]
```



### Change toolbar color

```
MDTopAppBar:  
    title: "MDTopAppBar"  
    md_bg_color: app.theme_cls.accent_color
```



### Change toolbar text color

```
MDTopAppBar:  
    title: "MDTopAppBar"  
    specific_text_color: app.theme_cls.accent_color
```




### Shadow elevation control

```
MDTopAppBar:  
    title: "Elevation 4"  
    elevation: 4
```



## Bottom

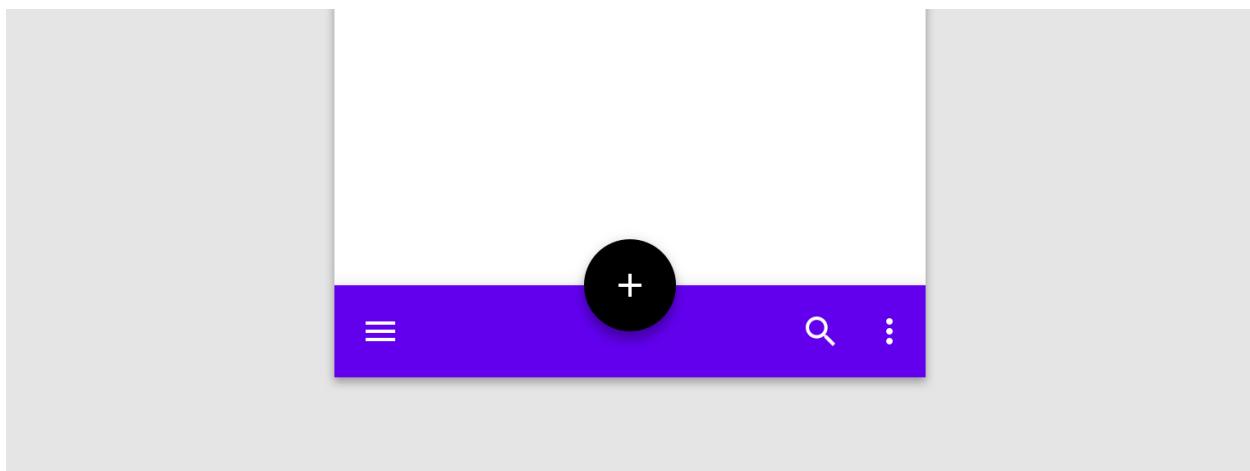

## Usage

```
from kivy.lang import Builder
from kivymd.app import MDApp

KV = """
MDBottomAppBar:
    MDTopAppBar:
        title: "Title"
        icon: "git"
        type: "bottom"
        left_action_items: [["menu", lambda x: x]]
    ...
"""

class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)
```

(continues on next page)

(continued from previous page)

```
Test().run()
```



## Event on floating button

Event on\_action\_button:

```
MDBottomAppBar:
```

```
MDTopAppBar:
    title: "Title"
    icon: "git"
    type: "bottom"
    left_action_items: [["menu", lambda x: x]]
    on_action_button: app.callback(self.icon)
```

## Floating button position

Mode:

- 'free-end'
- 'free-center'
- 'end'
- 'center'

```
MDBottomAppBar:
```

```
MDTopAppBar:
    title: "Title"
    icon: "git"
    type: "bottom"
    left_action_items: [["menu", lambda x: x]]
    mode: "end"
```



MDBottomAppBar:

```
MDTopAppBar:
    title: "Title"
    icon: "git"
    type: "bottom"
    left_action_items: [["menu", lambda x: x]]
    mode: "free-end"
```




## Custom color

MDBottomAppBar:

```
    md_bg_color: 0, 1, 0, 1
```

MDTopAppBar:

```
    title: "Title"
    icon: "git"
    type: "bottom"
    left_action_items: [["menu", lambda x: x]]
    icon_color: 0, 1, 0, 1
```

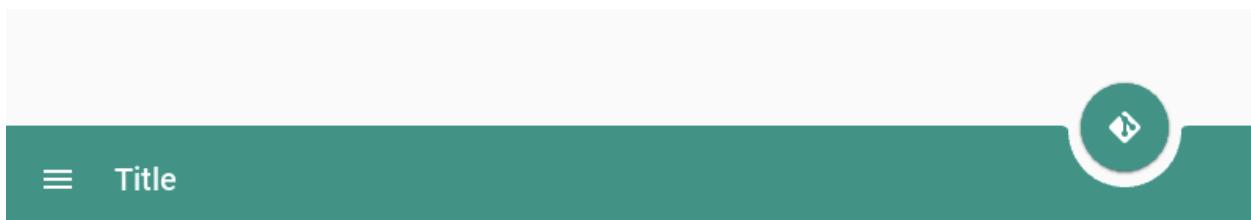

## Tooltips

You can add MDTooltips to the Toolbar icons by adding a text string to the toolbar item, as shown below

```
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.snackbar import Snackbar

KV = '''
MDBoxLayout:
    orientation: "vertical"

    MDTopAppBar:
        title: "MDTopAppBar"
        left_action_items: [["menu", "This is the navigation"]]
        right_action_items:
            [["dots-vertical", lambda x: app.callback(x), "this is the More Actions"]]

        MDLabel:
            text: "Content"
            halign: "center"
    ...

class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

    def callback(self, button):
        Snackbar(text="Hello World").open()

Test().run()
```

## Material design 3 style

```
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.toolbar import MDTopAppBar

KV = '''
MDScreen:

    MDBBoxLayout:
        id: box
        orientation: "vertical"
        spacing: "12dp"
        pos_hint: {"top": 1}
        adaptive_height: True
    ...
```

(continues on next page)

(continued from previous page)

```

class TestNavigationDrawer(MDApp):
    def build(self):
        self.theme_cls.material_style = "M3"
        return Builder.load_string(KV)

    def on_start(self):
        for type_height in ["medium", "large", "small"]:
            self.root.ids.box.add_widget(
                MDTopAppBar(
                    type_height=type_height,
                    headline_text=f"Headline {type_height.lower()}",  

                    md_bg_color="#2d2734",
                    left_action_items=[["arrow-left", lambda x: x]],
                    right_action_items=[
                        ["attachment", lambda x: x],
                        ["calendar", lambda x: x],
                        ["dots-vertical", lambda x: x],
                    ],
                    title="Title" if type_height == "small" else ""
                )
            )

```

TestNavigationDrawer().run()



## API - kivymd.uix.toolbar.toolbar

**class kivymd.uix.toolbar.toolbar.ActionTopAppBarButton(\*args, \*\*kwargs)**

Implements action buttons on the toolbar.

### overflow\_text

**class kivymd.uix.toolbar.toolbar.MDTopAppBar(\*\*kwargs)**

#### Events

##### on\_action\_button

Method for the button used for the `MDBottomAppBar` class.

##### left\_action\_items

The icons on the left of the toolbar. To add one, append a list like the following:

```
MDTopAppBar:  
    left_action_items: ["dots-vertical", callback, "tooltip text", "overflow  
→text"]
```

icon\_name - is a string that corresponds to an icon definition:

```
MDTopAppBar:  
    right_action_items: [["home"]]
```



callback - is the function called on a touch release event and:

```
MDTopAppBar:  
    right_action_items: [["home", lambda x: app.callback(x)]]
```


```
class Test(MDApp):  
    def callback(self, instance_action_top_appbar_button):  
        print(instance_action_top_appbar_button)
```

tooltip text - is the text to be displayed in the tooltip:

```
MDTopAppBar:  
    right_action_items:  
    [  
        ["home", lambda x: app.callback(x), "Home"],  
        ["message-star", lambda x: app.callback(x), "Message star"],  
        ["message-question", lambda x: app.callback(x), "Message question"],  
        ["message-reply", lambda x: app.callback(x), "Message reply"],  
    ]
```

overflow text - is the text for menu items (OverFlowMenuItem) of the corresponding action buttons:

```
MDTopAppBar:  
    right_action_items:  
    [  
        ["home", lambda x: app.callback(x), "", "Home"],  
        ["message-star", lambda x: app.callback(x), "", "Message star"],  
        ["message-question", lambda x: app.callback(x), "", "Message question  
→"],  
        ["message-reply", lambda x: app.callback(x), "", "Message reply"],  
    ]
```

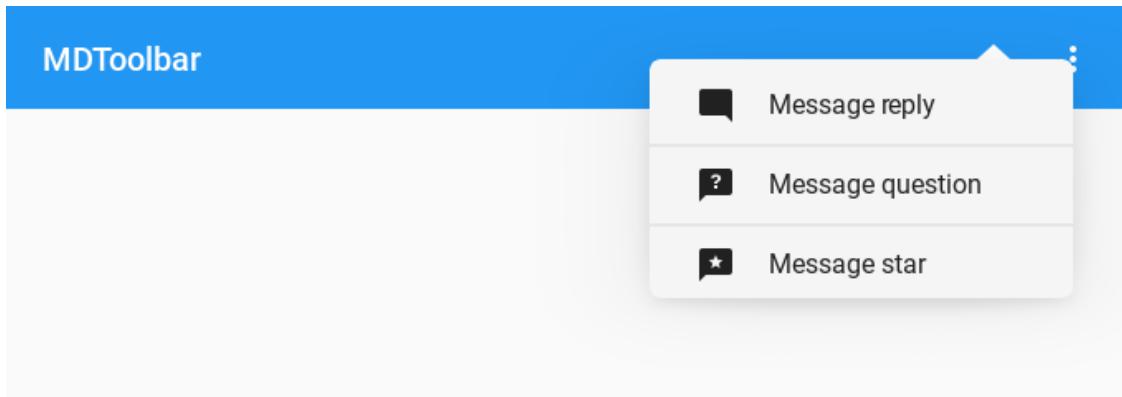

Both the `callback` and `tooltip_text` and `overflow_text` are optional but the order must be preserved.

`left_action_items` is an `ListProperty` and defaults to `[]`.

#### `right_action_items`

The icons on the left of the toolbar. Works the same way as `left_action_items`.

`right_action_items` is an `ListProperty` and defaults to `[]`.

#### `title`

Text toolbar.

```
MDTopAppBar:  
    title: "MDTopAppBar"
```



`title` is an `StringProperty` and defaults to ''.

#### `mode`

Floating button position. Only for `MDBottomAppBar` class. Available options are: 'free-end', 'free-center', 'end', 'center'.

**Mode "end":**

```
MDBottomAppBar:  
    MDTopAppBar:  
        title: "Title"  
        icon: "git"  
        type: "bottom"  
        left_action_items: [[{"menu": lambda x: x}]]  
        mode: "end"
```



**Mode “free-end”:**

```
MDBottomAppBar:
```


```
  MDTopAppBar:
    mode: "free-end"
```



**Mode “free-center”:**

```
MDBottomAppBar:
```

```
  MDTopAppBar:
    mode: "free-center"
```

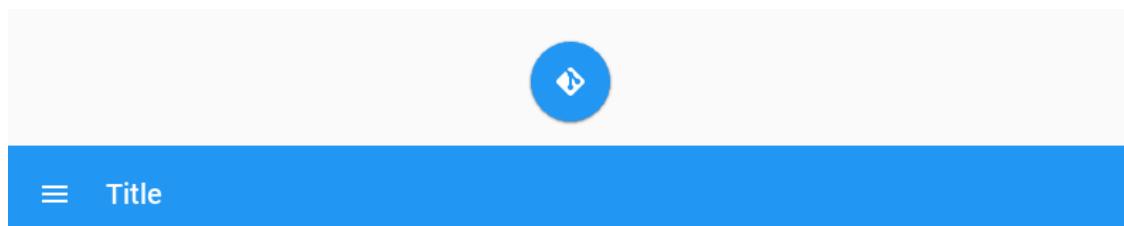

**Mode “center”:**

```
MDBottomAppBar:
```

```
  MDTopAppBar:
    mode: "center"
```



*mode* is an `OptionProperty` and defaults to ‘center’.

**type**

When using the `MDBottomAppBar` class, the parameter `type` must be set to ‘bottom’:

```
MDBottomAppBar:
```

```
  MDTopAppBar:
    type: "bottom"
```

Available options are: ‘top’, ‘bottom’.


`type` is an `OptionProperty` and defaults to ‘top’.

#### **opposite\_colors**

Changes the color of the label to the color opposite to the main theme.

`MDTopAppBar:`

`opposite_colors: True`



MDToolbar

`MDTopAppBar:`

`opposite_colors: True`



MDToolbar

#### **md\_bg\_bottom\_color**

The background color in (r, g, b, a) or string format for the toolbar with the `bottom` mode.

New in version 1.0.0.

`MDBottomAppBar:`

`MDTopAppBar:`

`md_bg_bottom_color: 0, 1, 0, 1`

`icon_color: self.md_bg_bottom_color`



≡ Title

`md_bg_bottom_color` is an `ColorProperty` and defaults to `None`.

#### **set\_bars\_color**

If `True` the background color of the bar status will be set automatically according to the current color of the toolbar.

New in version 1.0.0.

See `set_bars_colors` <[https://kivymd.readthedocs.io/en/latest/api/kivymd/utils/set\\_bars\\_colors/](https://kivymd.readthedocs.io/en/latest/api/kivymd/utils/set_bars_colors/)> for more information.

`set_bars_color` is an `BooleanProperty` and defaults to `False`.

#### **use\_overflow**

As a top app bar is resized, actions move to the overflow menu from right to left.

New in version 1.0.0.

`MDTopAppBar:`

`title: "MDTopAppBar"`

`use_overflow: True`

(continues on next page)

(continued from previous page)

```
right_action_items:
    [
        ["home", lambda x: app.callback(x), "Home", "Home"],
        ["message-star", lambda x: app.callback(x), "Message star", "Message ↵star"],
        ["message-question", lambda x: app.callback(x), "Message question", "Message ↵question"],
        ["message-reply", lambda x: app.callback(x), "Message reply", "Message ↵reply"],
    ]
```

`use_overflow` is an `BooleanProperty` and defaults to `False`.

#### overflow\_cls

Must be an object of the `MDDropdownMenu` class documentation for more information.

New in version 1.0.0.

```
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.menu import MDDropdownMenu

KV = '''
#:import CustomOverFlowMenu __main__.CustomOverFlowMenu


MDBoxLayout:
    orientation: "vertical"

    MDTopAppBar:
        title: "MDTopAppBar"
        use_overflow: True
        overflow_cls: CustomOverFlowMenu()
        right_action_items:
            [
                ["home", lambda x: app.callback(x), "Home", "Home"],
                ["message-star", lambda x: app.callback(x), "Message star", "Message ↵star"],
                ["message-question", lambda x: app.callback(x), "Message question", "Message ↵question"],
                ["message-reply", lambda x: app.callback(x), "Message reply", "Message ↵reply"],
            ]

    MDLabel:
        text: "Content"
        halign: "center"
'''
```

(continues on next page)

(continued from previous page)

```

class CustomOverFlowMenu(MDDropdownMenu):
    # In this class you can set custom properties for the overflow menu.
    pass

class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

    def callback(self, instance_action_top_appbar_button):
        print(instance_action_top_appbar_button)

Test().run()

```

*overflow\_cls* is an `ObjectProperty` and defaults to `None`.

#### **icon**

Floating button. Only for `MDBottomAppBar` class.

*icon* is an `StringProperty` and defaults to ‘`android`’.

#### **icon\_color**

Color in (r, g, b, a) or string format action button. Only for `MDBottomAppBar` class.

*icon\_color* is an `ColorProperty` and defaults to `[]`.

#### **anchor\_title**

Position toolbar title. Only used with `material_style = ‘M3’` Available options are: ‘`left`’, ‘`center`’, ‘`right`’.

*anchor\_title* is an `OptionProperty` and defaults to `None`.

#### **headline\_text**

Headline text toolbar.

New in version 1.0.0.

*headline\_text* is an `StringProperty` and defaults to ‘`“”`’.

#### **headline\_text\_color**

Headline text color in (r, g, b, a) or string format.

New in version 1.0.0.

*headline\_text\_color* is an `ColorProperty` and defaults to `None`.

#### **type\_height**

Toolbar height type.

New in version 1.0.0.

Available options are: ‘`small`’, ‘`large`’, ‘`small`’.

*type\_height* is an `OptionProperty` and defaults to ‘`small`’.

#### **set\_headline\_font\_style(self, interval: Union[int, float])**

#### **on\_width(self, instance\_toolbar, width: float)**

Called when the toolbar is resized (size of the application window).

```
return_action_button_to_toolbar(self)
remove_overflow_button(self)
    Removes an overflow button to the toolbar.

add_overflow_button(self)
    Adds an overflow button to the toolbar.

overflow_action_button_is_added(self)
    Returns True if at least one action button (:class:`~ActionTopAppBarButton`) on the toolbar is added to the
    overflow.

add_action_button_to_overflow(self)
    Adds an overflow button to the toolbar.

check_overflow_cls(self, interval: Union[int, float])
    If the user does not set the overflow_cls attribute but uses overflows, the overflow_cls attribute will
    use the default value.

on_type(self, instance_toolbar, type_value: str)
    Called when the value of the type attribute changes.

on_type_height(self, instance_toolbar, height_type_value: str)
    Called when the value of the type_height attribute changes.

on_action_button(self, *args)
    Method for the button used for the MDBottomAppBar class.

on_overflow_cls(self, instance_toolbar, instance_overflow_cls: MDDropdownMenu)
    Called when the value of the overflow_cls attribute changes.

on_md_bg_color(self, instance_toolbar, color_value: list)
    Called when the value of the md_bg_color attribute changes.

on_left_action_items(self, instance_toolbar, items_value: list)
    Called when the value of the left_action_items attribute changes.

on_right_action_items(self, instance_toolbar, items_value: list)
    Called when the value of the right_action_items attribute changes.

on_icon(self, instance_toolbar, icon_name: str)
    Called when the value of the icon attribute changes.

on_icon_color(self, instance, icon_name: str)
    Called when the value of the icon_color attribute changes.

on_md_bg_bottom_color(self, instance_toolbar, color_value: list)
    Called when the value of the md_bg_bottom_color attribute changes.

on_anchor_title(self, instance_toolbar, anchor_value: str)
    Called when the value of the anchor_title attribute changes.

on_mode(self, instance_toolbar, mode_value: str)
    Called when the value of the mode attribute changes.

set_md_bg_color(self, instance_toolbar, color_value: list)

set_notch(self)
```

```

set_shadow(self, *args)
get_default_overflow_cls(self)
update_overflow_menu_items(self, action_button)
update_bar_height(self, instance_theme_manager, material_style_value: str)
update_floating_radius(self, interval: Union[int, float])
update_anchor_title(self, material_style_value: str)
update_action_bar(self, instance_box_layout, action_bar_items: list)
update_md_bg_color(self, *args)
update_action_bar_text_colors(self, *args)
remove_notch(self)
remove_shadow(self)

class kivymd.uix.toolbar.toolbar.MDBottomAppBar(*args, **kwargs)

```

Implements the creation and addition of child widgets as declarative programming style.

#### **md\_bg\_color**

Color toolbar in (r, g, b, a) or string format.

*md\_bg\_color* is an [ColorProperty](#) and defaults to [0, 0, 0, 0].

#### **add\_widget(self, widget, index=0, canvas=None)**

Add a new widget as a child of this widget.

##### **Parameters**

###### **widget: Widget**

Widget to add to our list of children.

###### **index: int, defaults to 0**

Index to insert the widget in the list. Notice that the default of 0 means the widget is inserted at the beginning of the list and will thus be drawn on top of other sibling widgets. For a full discussion of the index and widget hierarchy, please see the Widgets Programming Guide.

New in version 1.0.5.

###### **canvas: str, defaults to None**

Canvas to add widget's canvas to. Can be 'before', 'after' or None for the default canvas.

New in version 1.9.0.

```

>>> from kivy.uix.button import Button
>>> from kivy_uix.slider import Slider
>>> root = Widget()
>>> root.add_widget(Button())
>>> slider = Slider()
>>> root.add_widget(slider)


```

### 2.3.27 NavigationRail

New in version 1.0.0.

See also:

Material Design spec, Navigation rail

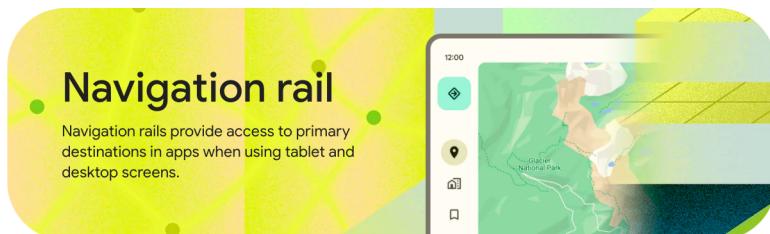

#### Usage

[MDNavigationRail](#):

[MDNavigationRailItem](#):

[MDNavigationRailItem](#):

[MDNavigationRailItem](#):

Declarative KV style

```
from kivy.lang import Builder

from kivymd.app import MDApp

KV = '''
MDBoxLayout:
    MDNavigationRail:
        MDNavigationRailItem:
            text: "Python"
            icon: "language-python"

        MDNavigationRailItem:
            text: "JavaScript"
            icon: "language-javascript"

        MDNavigationRailItem:
            text: "CPP"
            icon: "language-cpp"

        MDNavigationRailItem:
            text: "Git"

```

(continues on next page)

(continued from previous page)

```

        icon: "git"

    MDScreen:
    ,,


class Example(MDApp):
    def build(self):
        return Builder.load_string(KV)

Example().run()

```

Declarative python style

```

from kivymd.app import MDApp
from kivymd.uix.boxlayout import MDBBoxLayout
from kivymd.uix.navigationrail import MDNavigationRail, MDNavigationRailItem

class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return (
            MDBBoxLayout(
                MDNavigationRail(
                    MDNavigationRailItem(
                        text="Python",
                        icon="language-python",
                    ),
                    MDNavigationRailItem(
                        text="JavaScript",
                        icon="language-javascript",
                    ),
                    MDNavigationRailItem(
                        text="CPP",
                        icon="language-cpp",
                    ),
                    MDNavigationRailItem(
                        text="Git",
                        icon="git",
                    ),
                )
            )
        )

```

Example().run()



## Example

Declarative KV and imperative python styles

```
from kivy.clock import Clock
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.behaviors import CommonElevationBehavior
from kivymd.uix.boxlayout import MDBBoxLayout
from kivymd.uix.button import MDFillRoundFlatButton
from kivymd.uix.label import MDLabel
from kivymd.uix.screen import MDScreen

KV = '''
#:import FadeTransition kivy.uix.screenmanager.FadeTransition

<ExtendedButton>
    elevation: 3.5
    shadow_radius: 12
    shadow_softness: 4
```

(continues on next page)

(continued from previous page)

```
-height: "56dp"

<DrawerClickableItem@MDNavigationDrawerItem>
    focus_color: "#e7e4c0"
    unfocus_color: "#ffffcf4"

MDScreen:

    MDNavigationLayout:

        ScreenManager:

            MDScreen:

                MDBBoxLayout:
                    orientation: "vertical"

                    MDBBoxLayout:
                        adaptive_height: True
                        md_bg_color: "#ffffcf4"
                        padding: "12dp"

                        MDLabel:
                            text: "12:00"
                            adaptive_height: True
                            pos_hint: {"center_y": .5}

                MDBBoxLayout:

                    MDNavigationRail:
                        id: navigation_rail
                        md_bg_color: "#ffffcf4"
                        selected_color_background: "#e7e4c0"
                        ripple_color_item: "#e7e4c0"
                        on_item_release: app.switch_screen(*args)

                    MDNavigationRailMenuButton:
                        on_release: nav_drawer.set_state("open")

                    MDNavigationRailFabButton:
                        md_bg_color: "#b0f0d6"

                    MDNavigationRailItem:
                        text: "Python"
                        icon: "language-python"

                    MDNavigationRailItem:
                        text: "JavaScript"
                        icon: "language-javascript"
```

(continues on next page)

(continued from previous page)

```
MDNavigationRailItem:  
    text: "CPP"  
    icon: "language-cpp"  
  
MDNavigationRailItem:  
    text: "Swift"  
    icon: "language-swift"  
  
ScreenManager:  
    id: screen_manager  
    transition:  
        FadeTransition(duration=.2, clearcolor=app.theme_cls.bg_  
↪dark)  
  
MDNavigationDrawer:  
    id: nav_drawer  
    radius: (0, 16, 16, 0)  
    md_bg_color: "#ffffcf4"  
    elevation: 4  
    width: "240dp"  
  
MDNavigationDrawerMenu:  
  
    MDBoxLayout:  
        orientation: "vertical"  
        adaptive_height: True  
        spacing: "12dp"  
        padding: "3dp", 0, 0, "12dp"  
  
    MDIconButton:  
        icon: "menu"  
  
    ExtendedButton:  
        text: "Compose"  
        icon: "pencil"  
  
    DrawerClickableItem:  
        text: "Python"  
        icon: "language-python"  
  
    DrawerClickableItem:  
        text: "JavaScript"  
        icon: "language-javascript"  
  
    DrawerClickableItem:  
        text: "CPP"  
        icon: "language-cpp"  
  
    DrawerClickableItem:  
        text: "Swift"  
        icon: "language-swift"  
...  
...
```

(continues on next page)

(continued from previous page)

```

class ExtendedButton(MDFillRoundFlatButton, CommonElevationBehavior):
    """
    Implements a button of type
    `Extended FAB <https://m3.material.io/components/extended-fab/overview>`_.

    .. rubric::
        Extended FABs help people take primary actions.
        They're wider than FABs to accommodate a text label and larger target
        area.

    This type of buttons is not yet implemented in the standard widget set
    of the KivyMD library, so we will implement it ourselves in this class.
    """

    def __init__(self, *args, **kwargs):
        super().__init__(*args, **kwargs)
        self.padding = "16dp"
        Clock.schedule_once(self.set_spacing)

    def set_spacing(self, interval):
        self.ids.box.spacing = "12dp"

    def set_radius(self, *args):
        if self.rounded_button:
            self._radius = self.radius = self.height / 4


class Example(MDApp):
    def build(self):
        self.theme_cls.material_style = "M3"
        self.theme_cls.primary_palette = "Orange"
        return Builder.load_string(KV)

    def switch_screen(
        self, instance_navigation_rail, instance_navigation_rail_item
    ):
        """
        Called when tapping on rail menu items. Switches application screens.
        """

        self.root.ids.screen_manager.current = (
            instance_navigation_rail_item.icon.split("-")[1].lower()
        )

    def on_start(self):
        """
        Creates application screens.
        """

        navigation_rail_items = self.root.ids.navigation_rail.get_items()[:]
        navigation_rail_items.reverse()

```

(continues on next page)

(continued from previous page)

```

for widget in navigation_rail_items:
    name_screen = widget.icon.split("-")[1].lower()
    screen = MDScreen(
        name=name_screen,
        md_bg_color="#edd769",
        radius=[18, 0, 0, 0],
    )
    box = MDBBoxLayout(padding="12dp")
    label = MDLabel(
        text=name_screen.capitalize(),
        font_style="H1",
        halign="right",
        adaptive_height=True,
        shorten=True,
    )
    box.add_widget(label)
    screen.add_widget(box)
    self.root.ids.screen_manager.add_widget(screen)

```

Example().run()

Declarative python style

```

from kivy.clock import Clock
from kivy.metrics import dp

from kivymd.app import MDApp
from kivymd.uix.behaviors import CommonElevationBehavior
from kivymd.uix.boxlayout import MDBBoxLayout
from kivymd.uix.button import MDFillRoundFlatButton, MDIconButton
from kivymd.uix.label import MDLabel
from kivymd.uix.navigationdrawer import (
    MDNavigationDrawerItem,
    MDNavigationLayout,
    MDNavigationDrawer,
    MDNavigationDrawerMenu,
)
from kivymd.uix.navigationrail import (
    MDNavigationRail,
    MDNavigationRailMenuButton,
    MDNavigationRailFabButton,
    MDNavigationRailItem,
)
from kivymd.uix.screen import MDScreen
from kivymd.uix.screenmanager import MDScreenManager

class DrawerClickableItem(MDNavigationDrawerItem):
    def __init__(self, *args, **kwargs):
        super().__init__(*args, **kwargs)
        self.focus_color = "#e7e4c0"

```

(continues on next page)

(continued from previous page)

```

        self.unfocus_color = self.theme_cls.bg_light
        self.radius = 24

class ExtendedButton(MDFillRoundFlatButton, CommonElevationBehavior):
    def __init__(self, *args, **kwargs):
        super().__init__(*args, **kwargs)
        self.padding = "16dp"
        self.elevation = 3.5
        self.shadow_radius = 12
        self.shadow_softness = 4
        self.height = dp(56)
        Clock.schedule_once(self.set_spacing)

    def set_spacing(self, interval):
        self.ids.box.spacing = "12dp"

    def set_radius(self, *args):
        if self.rounded_button:
            self._radius = self.radius = self.height / 4

class Example(MDApp):
    def build(self):
        self.theme_cls.material_style = "M3"
        self.theme_cls.primary_palette = "Orange"
        return MDScreen(
            MDNavigationLayout(
                MDScreenManager(
                    MDScreen(
                        MDBBoxLayout(
                            MDBBoxLayout(
                                MDLabel(
                                    text="12:00",
                                    adaptive_height=True,
                                    pos_hint={"center_y": 0.5},
                                ),
                                adaptive_height=True,
                                md_bg_color="#ffffcf4",
                                padding="12dp",
                            ),
                            MDBBoxLayout(
                                MDNavigationRail(
                                    MDNavigationRailMenuButton(
  on_release=self.open_nav_drawer,
                                    ),
                                    MDNavigationRailFabButton(
  md_bg_color="#b0f0d6",
                                    ),
                                    MDNavigationRailItem(
  text="Python",
  icon="language-python",
                                    )
                                )
                            )
                        )
                    )
                )
            )
        )

```

(continues on next page)

(continued from previous page)

```

        ),
        MDNavigationRailItem(
            text="JavaScript",
            icon="language-javascript",
        ),
        MDNavigationRailItem(
            text="CPP",
            icon="language-cpp",
        ),
        MDNavigationRailItem(
            text="Swift",
            icon="language-swift",
        ),
        id="navigation_rail",
        md_bg_color="#ffffcf4",
        selected_color_background="#e7e4c0",
        ripple_color_item="#e7e4c0",
    ),
    MDScreenManager(
        id="screen_manager_content",
    ),
    id="root_box",
),
id="box_rail",
orientation="vertical",
),
id="box",
),
id="screen",
),
id="screen_manager",
),
MDNavigationDrawer(
    MDNavigationDrawerMenu(
        MDBBoxLayout(
            MDIconButton(
                icon="menu",
            ),
            ExtendedButton(
                text="Compose",
                icon="pencil",
            ),
            orientation="vertical",
            adaptive_height=True,
            spacing="12dp",
            padding=("3dp", 0, 0, "12dp"),
        ),
        DrawerClickableItem(
            text="Python",
            icon="language-python",
        ),
        DrawerClickableItem(

```

(continues on next page)

(continued from previous page)

```

        text="JavaScript",
        icon="language-javascript",
    ),
    DrawerClickableItem(
        text="CPP",
        icon="language-cpp",
    ),
    DrawerClickableItem(
        text="Swift",
        icon="language-swift",
    ),
),
id="nav_drawer",
radius=(0, 16, 16, 0),
elevation=4,
width="240dp",
),
)
)

def switch_screen(self, *args, screen_manager_content=None):
"""
Called when tapping on rail menu items. Switches application screens.
"""

instance_navigation_rail, instance_navigation_rail_item = args
screen_manager_content.current = (
    instance_navigation_rail_item.icon.split("-")[1].lower()
)

def open_nav_drawer(self, *args):
    self.root.ids.nav_drawer.set_state("open")

def on_start(self):
    """
Creates application screens.
"""

    screen_manager = self.root.ids.screen_manager
    root_box = screen_manager.ids.screen.ids.box.ids.box_rail.ids.root_box
    navigation_rail = root_box.ids.navigation_rail
    screen_manager_content = root_box.ids.screen_manager_content
    navigation_rail_items = navigation_rail.get_items()[:]
    navigation_rail_items.reverse()
    navigation_rail.bind(
        on_item_release=lambda *args: self.switch_screen(
            *args, screen_manager_content=screen_manager_content
        )
    )

    for widget in navigation_rail_items:
        name_screen = widget.icon.split("-")[1].lower()
        screen_manager_content.add_widget(
            MDScreen(
                MDBarLayout(

```

(continues on next page)

(continued from previous page)

```
        MDLabel(
            text=name_screen.capitalize(),
            font_style="H1",
            halign="right",
            adaptive_height=True,
            shorten=True,
        ),
        padding="12dp",
    ),
    name=name_screen,
    md_bg_color="#edd769",
    radius=[18, 0, 0, 0],
),
)
```

```
Example().run()
```

## API - kivymd.uix.navigationrail.navigationrail

```
class kivymd.uix.navigationrail.navigationrail.MDNavigationRailFabButton(*args, **kwargs)
```

Implements an optional floating action button (FAB).

### icon

Button icon name.

```
MDNavigationRail:
```

```
    MDNavigationRailFabButton:
        icon: "home"
```



`icon` is an `StringProperty` and defaults to ‘`pencil`’.

```
class kivymd.uix.navigationrail.navigationrail.MDNavigationRailMenuButton(*args, **kwargs)
```

Implements a menu button.

#### icon

Button icon name.

```
MDNavigationRail:
```

```
    MDNavigationRailMenuButton:  
        icon: "home"
```



`icon` is an `StringProperty` and defaults to ‘menu’.

```
class kivymd.uix.navigationrail.navigationrail.MDNavigationRailItem(**kwargs)
```

Implements a menu item with an icon and text.

**navigation\_rail**

`MDNavigationRail` object.

`navigation_rail` is an `ObjectProperty` and defaults to `None`.

**icon**

Icon item.

```
MDNavigationRail:
```

```
    MDNavigationRailItem:
        icon: "language-python"
```



`icon` is an `StringProperty` and defaults to ‘checkbox-blank’.

#### **text**

Text item.

```
MDNavigationRail:
```

```
MDNavigationRailItem:
    text: "Python"
    icon: "language-python"
```



`text` is an `StringProperty` and defaults to ''.

#### **badge\_icon**

Badge icon name.

```
MDNavigationRail:
```

```
MDNavigationRailItem:
    text: "Python"
    icon: "language-python"
    badge_icon: "plus"
```




`badge_icon` is an `StringProperty` and defaults to “”.

#### `badge_icon_color`

Badge icon color in (r, g, b, a) format.

MDNavigationRail:

```
MDNavigationRailItem:
    text: "Python"
    icon: "language-python"
    badge_icon: "plus"
    badge_icon_color: 0, 0, 1, 1
```

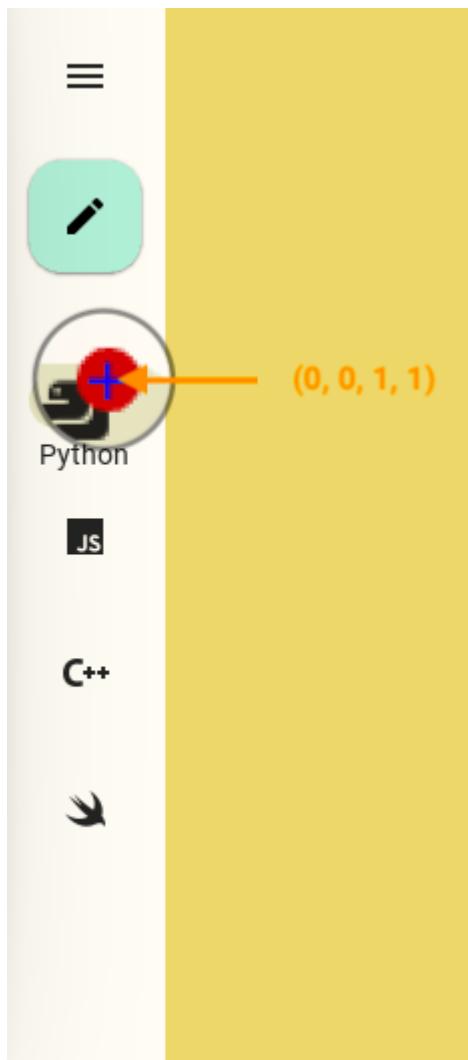


`badge_icon_color` is an `StringProperty` and defaults to `None`.

#### **badge\_bg\_color**

Badge icon background color in (r, g, b, a) format.

MDNavigationRail:

```
MDNavigationRailItem:
    text: "Python"
    icon: "language-python"
    badge_icon: "plus"
    badge_bg_color: "#b0f0d6"
```

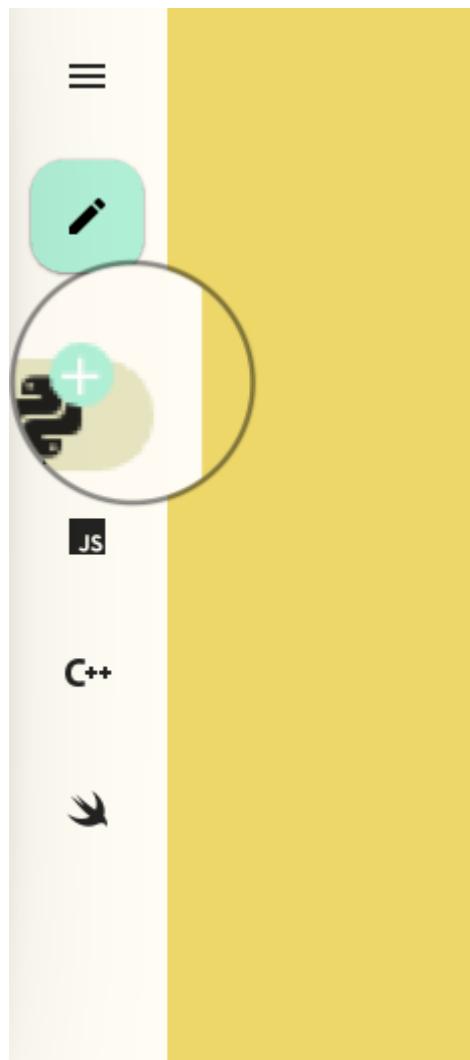


`badge_bg_color` is an `ColorProperty` and defaults to `None`.

#### `badge_font_size`

Badge icon font size.

##### MDNavigationRail:

```
MDNavigationRailItem:
    text: "Python"
    icon: "language-python"
    badge_icon: "plus"
    badge_font_size: "24sp"
```

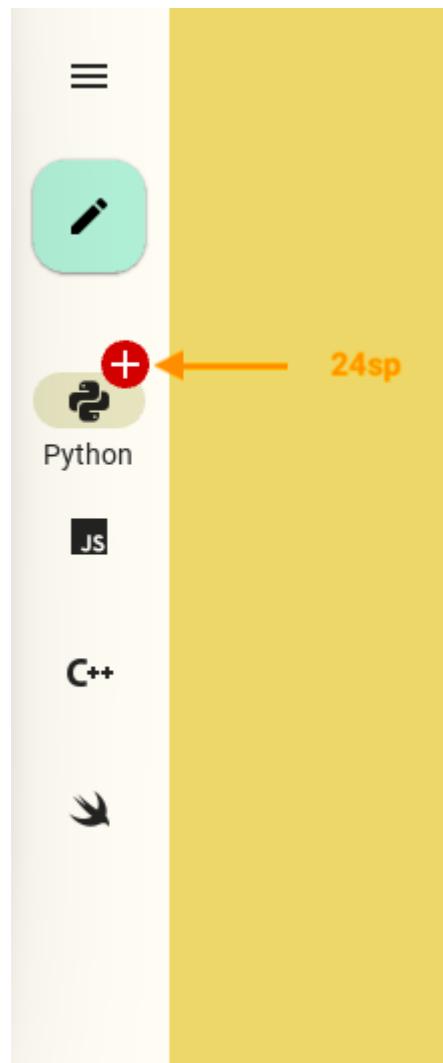

`badge_font_size` is an `NumericProperty` and defaults to `0`.

#### **active**

Is the element active.

`active` is an `BooleanProperty` and defaults to `False`.

#### `on_active(self, instance_navigation_rail_item, value_active: bool)`

Called when the value of `active` changes.

#### `animation_size_ripple_area(self, value: int)`

Animates the size/fade of the ripple area.

#### `on_press(self)`

Called when pressed on a panel element.

#### `on_release(self)`

Called when released on a panel element.

```
class kivymd.uix.navigationrail.navigationrail.MDNavigationRail(*args, **kwargs)
```

#### Events

**on\_item\_press**

Called on the *on\_press* event of menu item - *MDNavigationRailItem*.

**on\_item\_release**

Called on the *on\_release* event of menu item - *MDNavigationRailItem*.

**radius**

Rail radius.

*radius* is an *VariableListProperty* and defaults to [0, 0, 0, 0].

**padding**

Padding between layout box and children: [padding\_left, padding\_top, padding\_right, padding\_bottom].


*padding* is a *VariableListProperty* and defaults to [0, '36dp', 0, '36dp'].

**anchor**

The position of the panel with menu items. Available options are: 'top', 'bottom', 'center'.

**Top**

```
MDNavigationRail:  
    anchor: "top"  
  
    MDNavigationRailItem:  
        ...
```

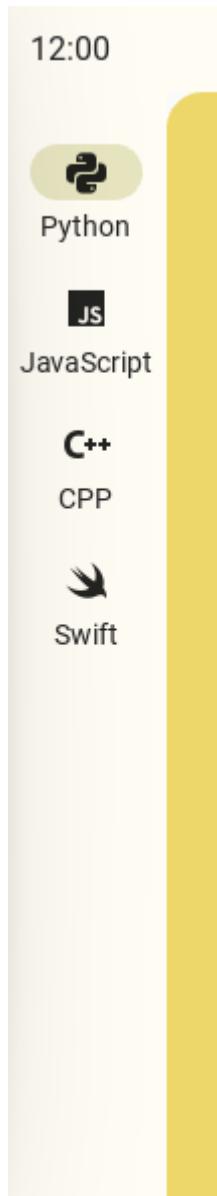


### Center

```
MDNavigationRail:  
    anchor: "center"  
  
    MDNavigationRailItem:  
        ...
```



### Bottom

```
MDNavigationRail:  
    anchor: "bottom"  
  
MDNavigationRailItem:  
    ...
```

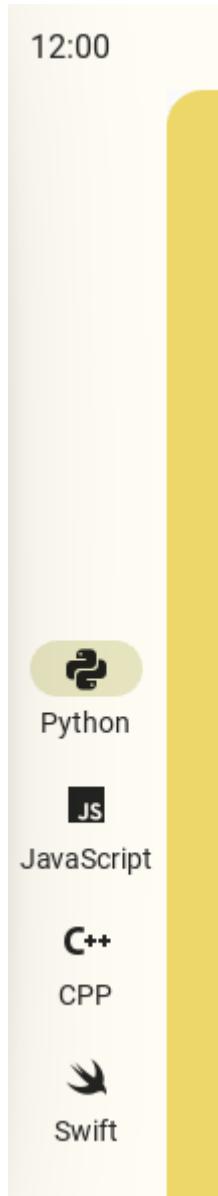

`anchor` is an [OptionProperty](#) and defaults to ‘`top`’.

#### **type**

Type of switching menu items. Available options are: ‘`labeled`’, ‘`selected`’, ‘`unselected`’.

#### **Labeled**

```
MDNavigationRail:  
    type: "labeled"  
  
MDNavigationRailItem:  
    ...
```



### Selected

```
MDNavigationRail:  
    type: "selected"  
  
MDNavigationRailItem:  
    ...
```

### Unselected


```
MDNavigationRail:  
    type: "unselected"  
  
MDNavigationRailItem:  
    ...
```

`type` is an `OptionProperty` and defaults to '*labeled*'.

### text\_color\_item\_normal

The text color in (r, g, b, a) or string format of the normal menu item (`MDNavigationRailItem`).

```
MDNavigationRail:  
    text_color_item_normal: app.theme_cls.primary_color  
  
MDNavigationRailItem:  
    ...
```

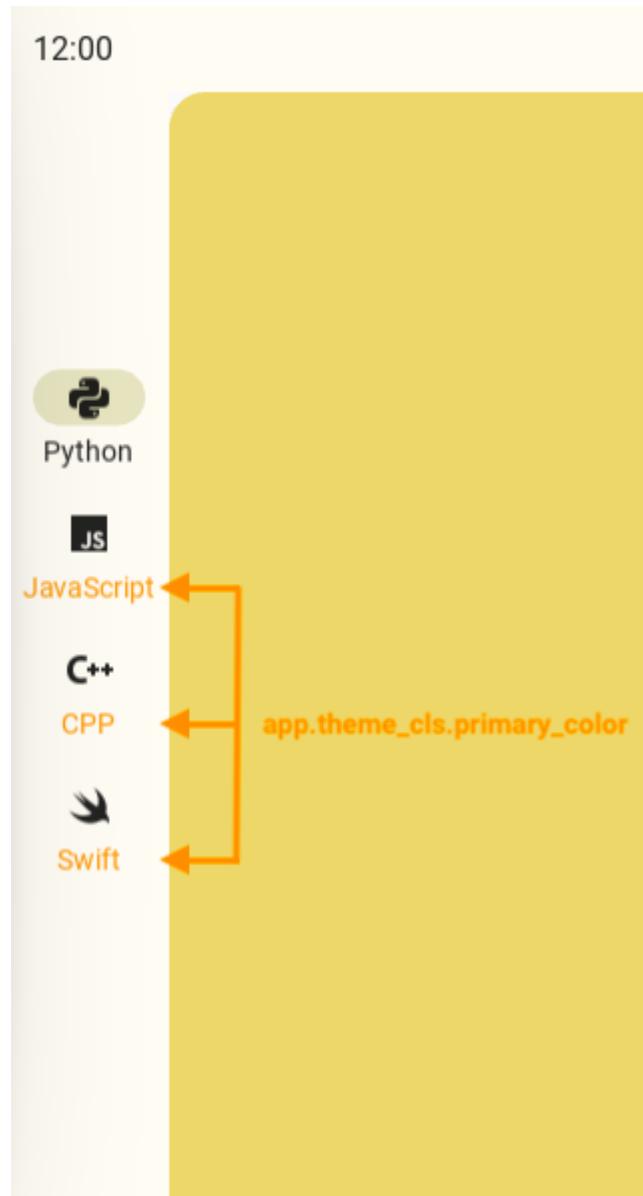

`text_color_item_normal` is an `ColorProperty` and defaults to `None`.

#### `text_color_item_active`

The text color in (r, g, b, a) or string format of the active menu item (`MDNavigationRailItem`).

```
MDNavigationRail:  
    text_color_item_active: app.theme_cls.primary_color
```

```
MDNavigationRailItem:  
    ...
```




`text_color_item_active` is an `ColorProperty` and defaults to `None`.

#### `icon_color_item_normal`

The icon color in (r, g, b, a) or string format of the normal menu item (`MDNavigationRailItem`).

```
MDNavigationRail:  
    icon_color_item_normal: app.theme_cls.primary_color
```

```
MDNavigationRailItem:  
    ...
```

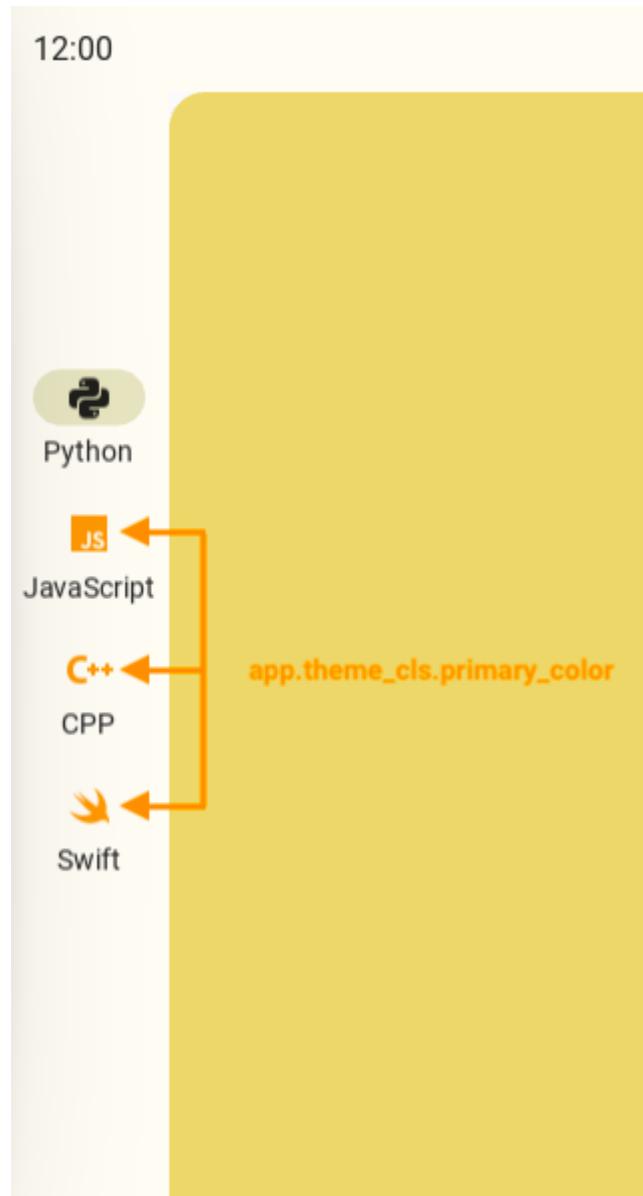


`icon_color_item_normal` is an `ColorProperty` and defaults to `None`.

#### `icon_color_item_active`

The icon color in (r, g, b, a) or string format of the active menu item (`MDNavigationRailItem`).

```
MDNavigationRail:  
    icon_color_item_active: app.theme_cls.primary_color
```

```
MDNavigationRailItem:  
    ...
```

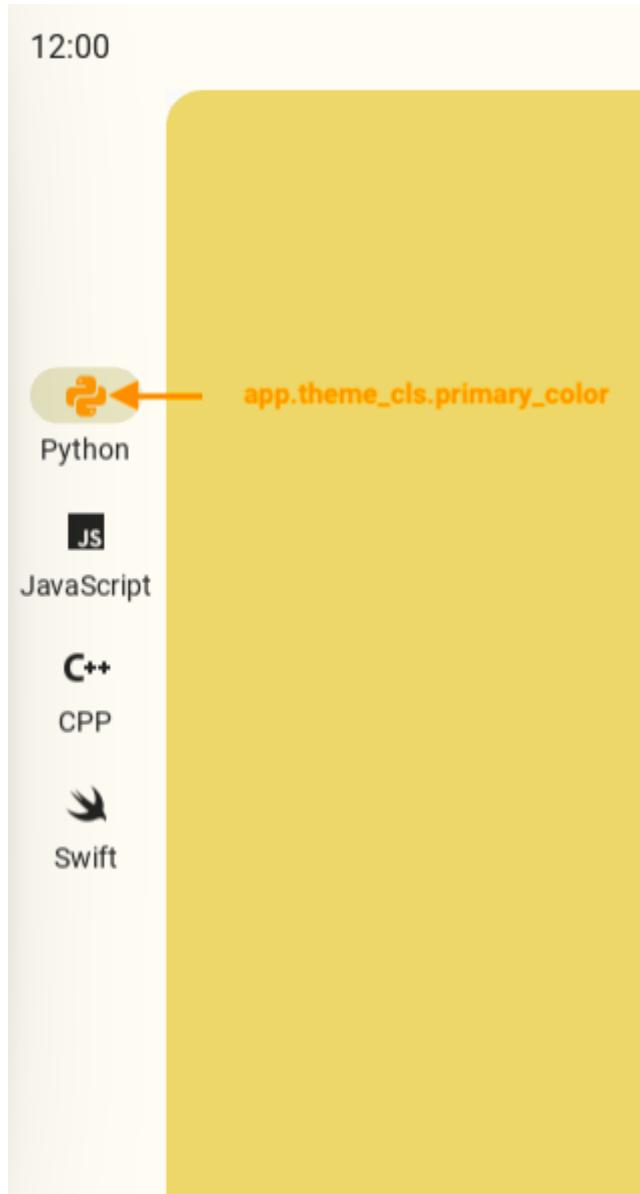


`icon_color_item_active` is an `ColorProperty` and defaults to `None`.

#### **selected\_color\_background**

Background color which will highlight the icon of the active menu item - `MDNavigationRailItem` - in (r, g, b, a) format.

```
MDNavigationRail:  
    selected_color_background: "#e7e4c0"  
  
MDNavigationRailItem:  
    ...
```

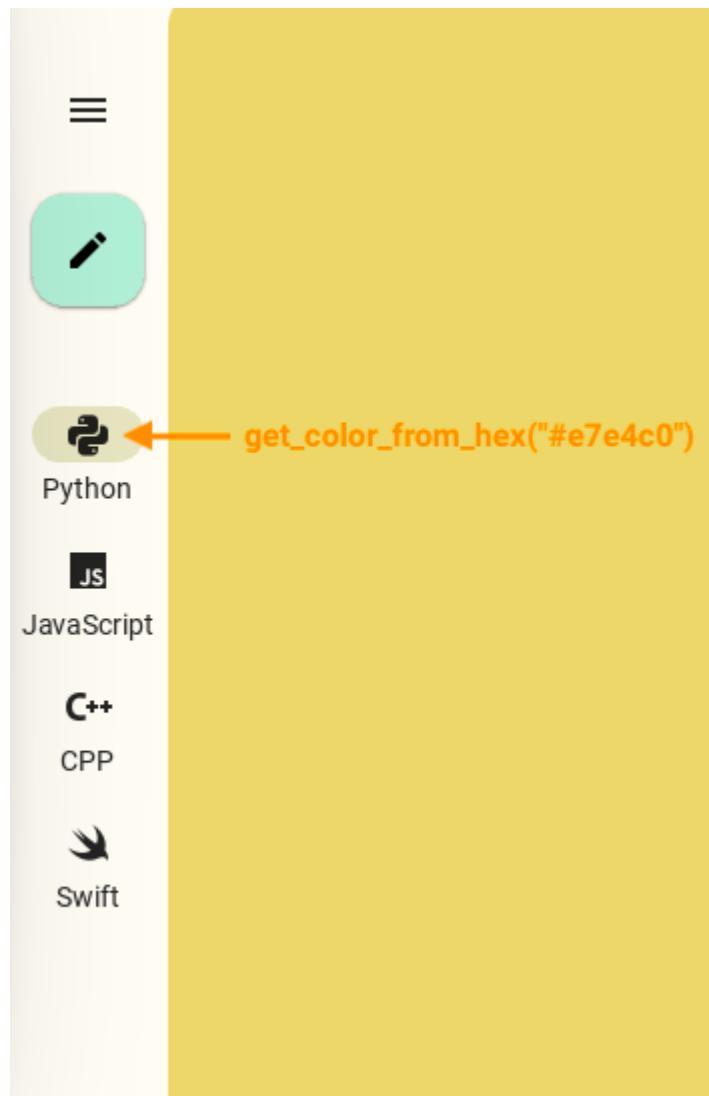

`selected_color_background` is an `ColorProperty` and defaults to `None`.

#### **ripple\_color\_item**

Ripple effect color of menu items (`MDNavigationRailItem`) in (r, g, b, a) format.

```
MDNavigationRail:  
    ripple_color_item: "#e7e4c0"  
  
MDNavigationRailItem:  
    ...
```



`ripple_color_item` is an `ColorProperty` and defaults to `None`.

#### `ripple_transition`


Type of animation of the ripple effect when a menu item is selected.

`ripple_transition` is a `StringProperty` and defaults to '`ripple_transition`'.

#### `current_selected_item`

Index of the menu list item (`MDNavigationRailItem`) that will be active by default

```
MDNavigationRail:  
    current_selected_item: 1  
  
    MDNavigationRailItem:  
        ...
```

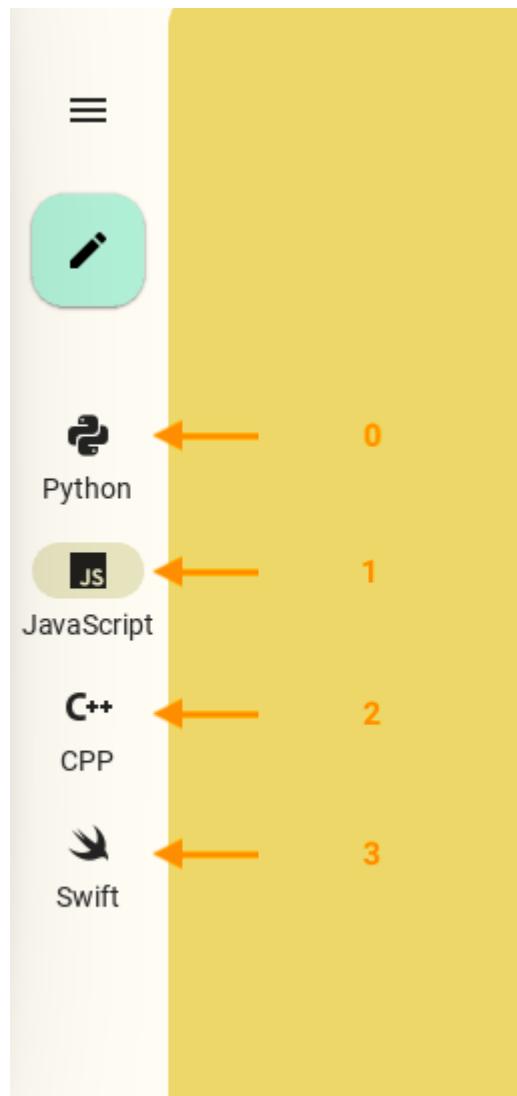

`current_selected_item` is a `NumericProperty` and defaults to 0.

#### **font\_name**

Font path for menu item (`MDNavigationRailItem`) text.

```
MDNavigationRail:
```

```
    MDNavigationRailItem:  
        text: "Python"  
        icon: "language-python"  
        font_name: "nasalization-rg.ttf"
```



`font_name` is an `StringProperty` and defaults to ‘*Roboto*’.

**on\_item\_press(self, \*args)**

Called on the `on_press` event of menu item - `MDNavigationRailItem`.

**on\_item\_release(self, \*args)**

Called on the `on_release` event of menu item - `MDNavigationRailItem`.

**deselect\_item(self, selected\_navigation\_rail\_item: MDNavigationRailItem)**

Sets the `active` value to `False` for all menu items (`MDNavigationRailItem`) except the selected item.  
Called when a menu item is touched.

**get\_items(self)**

Returns a list of `MDNavigationRailItem` objects

**set\_pos\_panel\_items(self, instance\_fab\_button: Union[None, MDNavigationRailFabButton],  
instance\_menu\_button: Union[None, MDNavigationRailFabButton])**

Set PanelItems panel position with menu items.

**set\_current\_selected\_item(self, interval: Union[int, float])**

Sets the active menu list item (`MDNavigationRailItem`).

**set\_pos\_menu\_fab\_buttons**(*self*, *interval*: Union[int, float])

Sets the position of the *MDNavigationRailFabButton* and *MDNavigationRailMenuButton* buttons on the panel.

**add\_widget**(*self*, *widget*, \**args*, \*\**kwargs*)

Add a new widget as a child of this widget.

#### Parameters

**widget: Widget**

Widget to add to our list of children.

**index: int, defaults to 0**

Index to insert the widget in the list. Notice that the default of 0 means the widget is inserted at the beginning of the list and will thus be drawn on top of other sibling widgets. For a full discussion of the index and widget hierarchy, please see the Widgets Programming Guide.

New in version 1.0.5.

**canvas: str, defaults to None**

Canvas to add widget's canvas to. Can be 'before', 'after' or None for the default canvas.

New in version 1.9.0.


```
>>> from kivy.uix.button import Button
>>> from kivy.uix.slider import Slider
>>> root = Widget()
>>> root.add_widget(Button())
>>> slider = Slider()
>>> root.add_widget(slider)
```

### 2.3.28 ProgressBar

#### See also:

Material Design spec, Progress indicators

Progress indicators express an unspecified wait time or display the length of a process.



KivyMD provides the following bars classes for use:

- *MDProgressBar*
- *Determinate*
- *Indeterminate*

### MDProgressBar

```
from kivy.lang import Builder


from kivymd.app import MDApp

KV = """
MDBoxLayout:
    padding: "10dp"

    MDProgressBar:
        value: 50
"""


class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

Test().run()
```




### Vertical orientation

```
MDProgressBar:  
    orientation: "vertical"  
    value: 50
```



### With custom color

```
MDProgressBar:  
    value: 50  
    color: app.theme_cls.accent_color
```



## Indeterminate

```
from kivy.lang import Builder
from kivy.properties import StringProperty

from kivymd.app import MDApp

KV = '''
MDScreen:

    MDProgressBar:
        id: progress
        pos_hint: {"center_y": .6}
        type: "indeterminate"

    MDRaisedButton:
        text: "STOP" if app.state == "start" else "START"
        pos_hint: {"center_x": .5, "center_y": .45}
        on_press: app.state = "stop" if app.state == "start" else "start"
    ...

class Test(MDApp):
    state = StringProperty("stop")

    def build(self):
        return Builder.load_string(KV)

    def on_state(self, instance, value):
        {
            "start": self.root.ids.progress.start,
            "stop": self.root.ids.progress.stop,
        }.get(value)()
```

Test().run()

## Determinate

```
MDProgressBar:
    type: "determinate"
    running_duration: 1
    catching_duration: 1.5
```

**API - kivymd.uix.progressbar.progressbar****class kivymd.uix.progressbar.progressbar.MDProgressBar(\*\*kwargs)**

Class for creating a progress bar widget.

See module documentation for more details.

**reversed**

Reverse the direction the progressbar moves.

*reversed* is an [BooleanProperty](#) and defaults to *False*.**orientation**

Orientation of progressbar. Available options are: ‘horizontal’, ‘vertical’.

*orientation* is an [OptionProperty](#) and defaults to ‘horizontal’.**color**

Progress bar color in (r, g, b, a) or string format.

*color* is an [ColorProperty](#) and defaults to *None*.**back\_color**

Progress bar back color in (r, g, b, a) or string format.

New in version 1.0.0.

*back\_color* is an [ColorProperty](#) and defaults to *None*.**running\_transition**

Running transition.

*running\_transition* is an [StringProperty](#) and defaults to ‘in\_cubic’.**catching\_transition**

Catching transition.

*catching\_transition* is an [StringProperty](#) and defaults to ‘out\_quart’.**running\_duration**

Running duration.

*running\_duration* is an [NumericProperty](#) and defaults to 0.5.**catching\_duration**

Catching duration.

*running\_duration* is an [NumericProperty](#) and defaults to 0.8.**type**

Type of progressbar. Available options are: ‘indeterminate’, ‘determinate’.

*type* is an [OptionProperty](#) and defaults to *None*.**check\_size(self, interval: Union[int, float])****start(self)**

Start animation.

**stop(self)**

Stop animation.


```
running_away(self, *args)
catching_up(self, *args)
```

### 2.3.29 Tooltip

#### See also:

Material Design spec, Tooltips

Toolips display informative text when users hover over, focus on, or tap an element.

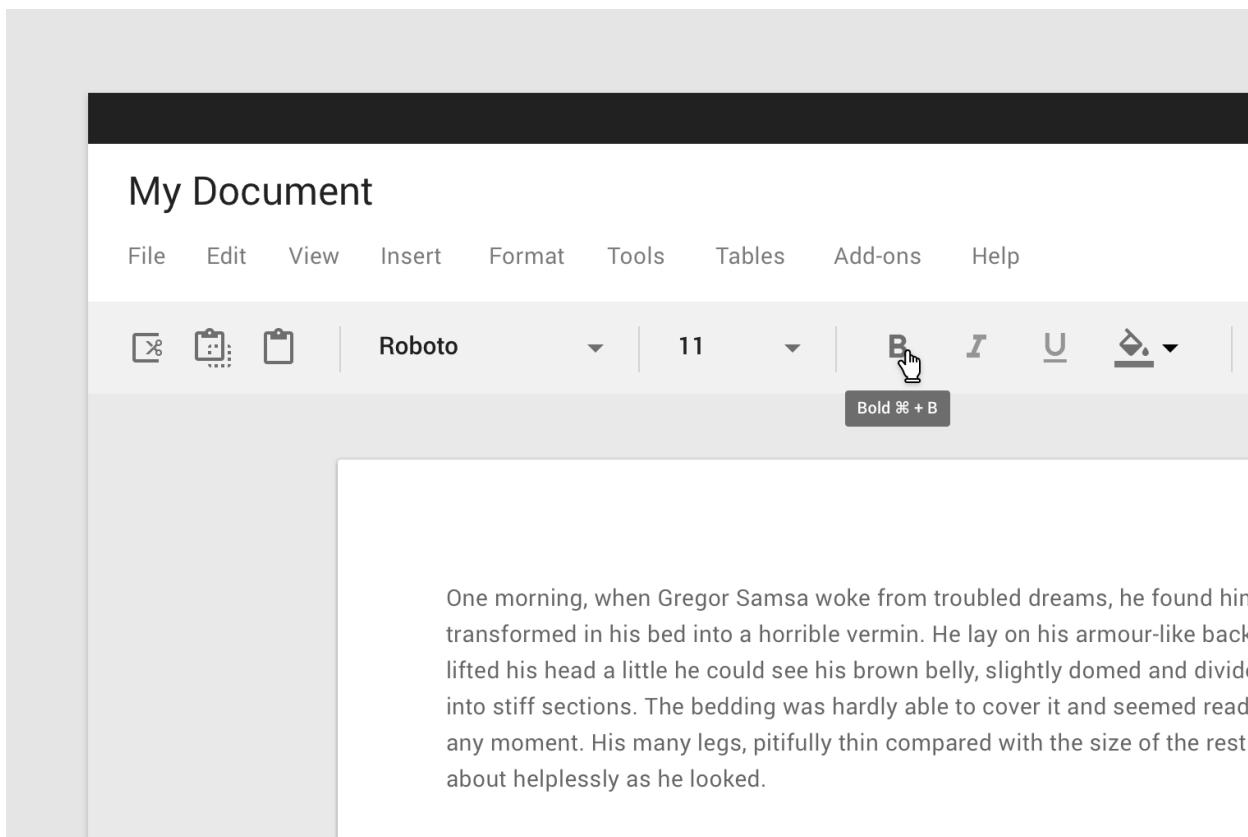

To use the `MDTooltip` class, you must create a new class inherited from the `MDTooltip` class:

In Kv-language:

```
<TooltipMDIconButton@MDIconButton+MDTooltip>
```

In Python code:

```
class TooltipMDIconButton(MDIconButton, MDTooltip):
    pass
```

**Warning:** `MDTooltip` only works correctly with button and label classes.

```
from kivy.lang import Builder
from kivymd.app import MDApp
KV = """
<TooltipMDIconButton@MDIconButton+MDTooltip>

MDScreen:

    TooltipMDIconButton:
        icon: "language-python"
        tooltip_text: self.icon
        pos_hint: {"center_x": .5, "center_y": .5}
"""

class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

Test().run()
```

**Note:** The behavior of tooltips on desktop and mobile devices is different. For more detailed information, [click here](#).

## API - `kivymd.uix.tooltip.tooltip`

```
class kivymd.uix.tooltip.tooltip.MDTooltip(**kwargs)
```

### Events

#### `on_enter`

Called when mouse enters the bbox of the widget AND the widget is visible

#### `on_leave`

Called when the mouse exits the widget AND the widget is visible

#### `tooltip_bg_color`

Tooltip background color in (r, g, b, a) or string format

`tooltip_bg_color` is an `ColorProperty` and defaults to `None`.

#### `tooltip_text_color`

Tooltip text color in (r, g, b, a) or string format

`tooltip_text_color` is an `ColorProperty` and defaults to `None`.

**tooltip\_text**

Tooltip text.

`tooltip_text` is an `StringProperty` and defaults to ''.

**tooltip\_font\_style**

Tooltip font style. Available options are: 'H1', 'H2', 'H3', 'H4', 'H5', 'H6', 'Subtitle1', 'Subtitle2', 'Body1', 'Body2', 'Button', 'Caption', 'Overline', 'Icon'.

`tooltip_font_style` is an `OptionProperty` and defaults to 'Caption'.

**tooltip\_radius**

Corner radius values.

`radius` is an `ListProperty` and defaults to [dp(7),].

**tooltip\_display\_delay**

Tooltip display delay.

`tooltip_display_delay` is an `BoundedNumericProperty` and defaults to 0, min of 0 & max of 4. This property only works on desktop.

**shift\_y**

Y-offset of tooltip text.

`shift_y` is an `NumericProperty` and defaults to 0.

**shift\_right**

Shifting the tooltip text to the right.

New in version 1.0.0.

`shift_right` is an `NumericProperty` and defaults to 0.

**shift\_left**

Shifting the tooltip text to the left.

New in version 1.0.0.

`shift_left` is an `NumericProperty` and defaults to 0.

**delete\_clock(self, widget, touch, \*args)**

**adjust\_tooltip\_position(self, x: float, y: float)**

Returns the coordinates of the tooltip that fit into the borders of the screen.

**display\_tooltip(self, interval: Union[int, float])**

**animation\_tooltip\_show(self, interval: Union[int, float])**

Animation of opening tooltip on the screen.

**animation\_tooltip\_dismiss(self, interval: Union[int, float])**

New in version 1.0.0.

Animation of closing tooltip on the screen.

**remove\_tooltip(self, \*args)**

Removes the tooltip widget from the screen.

**on\_long\_touch(self, touch, \*args)**

Called when the widget is pressed for a long time.

**on\_enter**(*self*, \**args*)  
See [on\\_enter](#) method in [HoverBehavior](#) class.

**on\_leave**(*self*)  
See [on\\_leave](#) method in [HoverBehavior](#) class.

**on\_show**(*self*)  
Default display event handler.

**on\_dismiss**(*self*)  
New in version 1.0.0.  
Default dismiss event handler.

**class kivymd.uix.tooltip.tooltip.MDTooltipViewClass(\*\*kwargs)**

Box layout class. See module documentation for more information.

**tooltip\_bg\_color**  
See [tooltip\\_bg\\_color](#).

**tooltip\_text\_color**  
See [tooltip\\_text\\_color](#).

**tooltip\_text**  
See [tooltip\\_text](#).

**tooltip\_font\_style**  
See [tooltip\\_font\\_style](#).


**tooltip\_radius**  
See [tooltip\\_radius](#).

### 2.3.30 Banner

See also:

Material Design spec, Banner

A banner displays a prominent message and related optional actions.

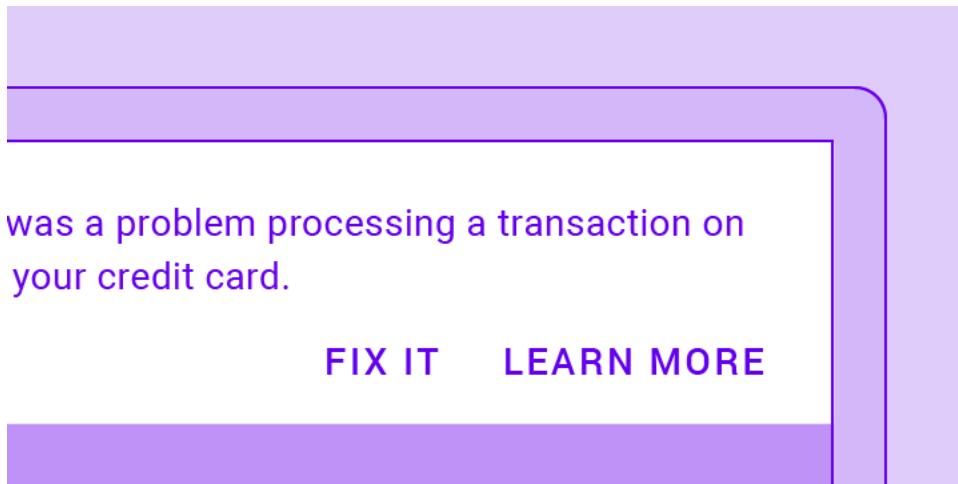

## Usage

```
from kivy.lang import Builder
from kivy.factory import Factory

from kivymd.app import MDApp

Builder.load_string('''
<ExampleBanner@Screen>

MDBanner:
    id: banner
    text: ["One line string text example without actions."]
    # The widget that is under the banner.
    # It will be shifted down to the height of the banner.
    over_widget: screen
    vertical_pad: toolbar.height

MDTopAppBar:
    id: toolbar
    title: "Example Banners"
    elevation: 4
    pos_hint: {'top': 1}

MDBBoxLayout:
    id: screen
    orientation: "vertical"
    size_hint_y: None
    height: Window.height - toolbar.height

    OneLineListItem:
        text: "Banner without actions"
        on_release: banner.show()
```

(continues on next page)

(continued from previous page)

```

Widget:
""")

class Test(MDApp):
    def build(self):
        return Factory.ExampleBanner()

Test().run()

```

### Banner type.

By default, the banner is of the type 'one-line':

```

MDBanner:
    text: ["One line string text example without actions."]

```




To use a two-line banner, specify the 'two-line' `MDBanner.type` for the banner and pass the list of two lines to the `MDBanner.text` parameter:

```

MDBanner:
    type: "two-line"
    text:
        ["One line string text example without actions.", "This is the second line of the banner message."]

```



Similarly, create a three-line banner:

```

MDBanner:
    type: "three-line"
    text:
        ["One line string text example without actions.", "This is the second line of the banner message.", "and this is the third line of the banner message."]

```



To add buttons to any type of banner, use the `MDBanner.left_action` and `MDBanner.right_action` parameters, which should take a list ['Button name', function]:


### MDBanner:

```
text: ["One line string text example without actions."]
left_action: ["CANCEL", lambda x: None]
```

Or two buttons:

### MDBanner:


```
text: ["One line string text example without actions."]
left_action: ["CANCEL", lambda x: None]
right_action: ["CLOSE", lambda x: None]
```



If you want to use the icon on the left in the banner, add the prefix '*-icon*' to the banner type:

### MDBanner:

```
type: "one-line-icon"
icon: f"{images_path}/kivymd.png"
text: ["One line string text example without actions."]
```



---

**Note:** See full example

---

## API - kivymd.uix.banner.banner

**class kivymd.uix.banner.MDBanner(\*args, \*\*kwargs)**

Implements the creation and addition of child widgets as declarative programming style.

### **vertical\_pad**

Indent the banner at the top of the screen.

*vertical\_pad* is an **NumericProperty** and defaults to *dp(68)*.

### **opening\_transition**

The name of the animation transition.

*opening\_transition* is an **StringProperty** and defaults to '*in\_quad*'.

### **icon**

Icon banner.

*icon* is an **StringProperty** and defaults to '*data/logo/kivy-icon-128.png*'.

### **over\_widget**

The widget that is under the banner. It will be shifted down to the height of the banner.

*over\_widget* is an **ObjectProperty** and defaults to *None*.

**text**

List of lines for banner text. Must contain no more than three lines for a ‘one-line’, ‘two-line’ and ‘three-line’ banner, respectively.

`text` is an [ListProperty](#) and defaults to `[]`.

**left\_action**

The action of banner.

To add one action, make a list [`'name_action'`, `callback`] where `'name_action'` is a string that corresponds to an action name and `callback` is the function called on a touch release event.

`left_action` is an [ListProperty](#) and defaults to `[]`.

**right\_action**

Works the same way as `left_action`.

`right_action` is an [ListProperty](#) and defaults to `[]`.

**type**

Banner type. . Available options are: (“one-line”, “two-line”, “three-line”, “one-line-icon”, “two-line-icon”, “three-line-icon”).

`type` is an [OptionProperty](#) and defaults to ‘one-line’.

**opening\_timeout**

Time interval after which the banner will be shown.

New in version 1.0.0.

`opening_timeout` is an [BoundedNumericProperty](#) and defaults to `0.7`.

**opening\_time**

The time taken for the banner to slide to the state ‘open’.

New in version 1.0.0.

`opening_time` is a [NumericProperty](#) and defaults to `0.15`.

**closing\_time**

The time taken for the banner to slide to the state ‘close’.

New in version 1.0.0.

`closing_time` is a [NumericProperty](#) and defaults to `0.15`.

**add\_actions\_buttons(self, instance\_box: MDBoxLayout, data: list)**

Adds buttons to the banner.

**Parameters**

`data` – [‘NAME BUTTON’, <function>];

**show(self)**

Displays a banner on the screen.

**hide(self)**

Hides the banner from the screen.


**set\_type\_banner(self)****animation\_display\_banner(self, interval: Union[int, float])**

### 2.3.31 Card

See also:

Material Design spec, Cards and Material Design 3 spec, Cards

**Cards contain content and actions about a single subject.**

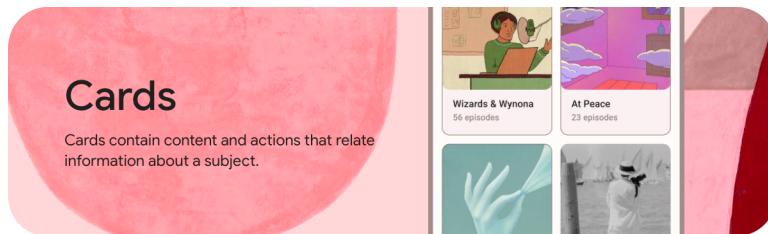

*KivyMD* provides the following card classes for use:

- *MDCard*
- *MDCardSwipe*

---

**Note:** *MDCard* inherited from `BoxLayout`. You can use all parameters and attributes of the `BoxLayout` class in the *MDCard* class.

---

#### MDCard

**An example of the implementation of a card in the style of material design version 3**

Declarative KV and imperative python styles

```
from kivy.lang import Builder
from kivy.properties import StringProperty

from kivymd.app import MDApp
from kivymd.uix.card import MDCard

KV = '''
<MD3Card>
    padding: 4
    size_hint: None, None
    size: "200dp", "100dp"

    MDRelativeLayout:

        MDIconButton:
            icon: "dots-vertical"
            pos_hint: {"top": 1, "right": 1}

        MDLabel:
'''
```

(continues on next page)

(continued from previous page)

```

        id: label
        text: root.text
        adaptive_size: True
        color: "grey"
        pos: "12dp", "12dp"
        bold: True

MDScreen:

    MDBBoxLayout:
        id: box
        adaptive_size: True
        spacing: "56dp"
        pos_hint: {"center_x": .5, "center_y": .5}
    ...

class MD3Card(MDCard):
    '''Implements a material design v3 card.'''
    text = StringProperty()

class Example(MDApp):
    def build(self):
        self.theme_cls.material_style = "M3"
        return Builder.load_string(KV)

    def on_start(self):
        styles = {
            "elevated": "#f6eeee", "filled": "#f4dedc", "outlined": "#f8f5f4"
        }
        for style in styles.keys():
            self.root.ids.box.add_widget(
                MD3Card(
                    line_color=(0.2, 0.2, 0.2, 0.8),
                    style=style,
                    text=style.capitalize(),
                    md_bg_color=styles[style],
                    shadow_softness=2 if style == "elevated" else 12,
                    shadow_offset=(0, 1) if style == "elevated" else (0, 2),
                )
            )

Example().run()

```

Declarative python styles

```

from kivymd.app import MDApp
from kivymd.uix.boxlayout import MDBBoxLayout

```

(continues on next page)

(continued from previous page)

```

from kivymd.uix.button import MDIconButton
from kivymd.uix.card import MDCard
from kivymd.uix.label import MDLabel
from kivymd.uix.relativelayout import MDRelativeLayout
from kivymd.uix.screen import MDScreen

class MD3Card(MDCard):
    '''Implements a material design v3 card.'''

class Example(MDApp):
    def build(self):
        self.theme_cls.material_style = "M3"
        return (
            MDScreen(
                MDBBoxLayout(
                    id="box",
                    adaptive_size=True,
                    spacing="56dp",
                    pos_hint={"center_x": 0.5, "center_y": 0.5},
                )
            )
        )

    def on_start(self):
        styles = {
            "elevated": "#f6eeee", "filled": "#f4dedc", "outlined": "#f8f5f4"
        }
        for style in styles.keys():
            self.root.ids.box.add_widget(
                MD3Card(
                    MDRelativeLayout(
                        MDIconButton(
                            icon="dots-vertical",
                            pos_hint={"top": 1, "right": 1}
                        ),
                        MDLabel(
                            text=style.capitalize(),
                            adaptive_size=True,
                            color="grey",
                            pos=(12dp, 12dp),
                        ),
                    ),
                    line_color=(0.2, 0.2, 0.2, 0.8),
                    style=style,
                    padding="4dp",
                    size_hint=(None, None),
                    size=("200dp", "100dp"),
                    md_bg_color=styles[style],
                    shadow_softness=2 if style == "elevated" else 12,
                    shadow_offset=(0, 1) if style == "elevated" else (0, 2),
                )
            )

```

(continues on next page)

(continued from previous page)

```
)  
)
```

```
Example().run()
```




## MDCardSwipe

To create a card with *swipe-to-delete* behavior, you must create a new class that inherits from the `MDCardSwipe` class:

```
<SwipeToDeleteItem>  
    size_hint_y: None  
    height: content.height  
  
    MDCardSwipeLayerBox:  
  
        MDCardSwipeFrontBox:  
  
            OneLineListItem:  
                id: content  
                text: root.text  
                _no_ripple_effect: True
```

```
class SwipeToDeleteItem(MDCardSwipe):  
    text = StringProperty()
```

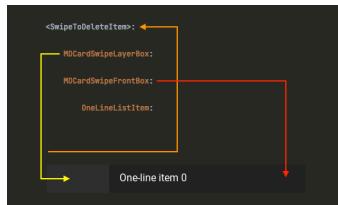

## End full code

Declarative KV and imperative python styles

```
from kivy.lang import Builder  
from kivy.properties import StringProperty  
  
from kivymd.app import MDApp  
from kivymd.uix.card import MDCardSwipe
```

(continues on next page)

(continued from previous page)

```

KV = '''
<SwipeToDeleteItem>
    size_hint_y: None
    height: content.height

MDCardSwipeLayerBox:
    # Content under the card.

MDCardSwipeFrontBox:

    # Content of card.
    OneLineListItem:
        id: content
        text: root.text
        _no_ripple_effect: True

MDScreen:

    MDBBoxLayout:
        orientation: "vertical"

        MDTopAppBar:
            elevation: 4
            title: "MDCardSwipe"

        MDScrollView:
            scroll_timeout : 100

        MDList:
            id: md_list
            padding: 0
    ...
    ...

class SwipeToDeleteItem(MDCardSwipe):
    '''Card with `swipe-to-delete` behavior.'''

    text = StringProperty()

class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return Builder.load_string(KV)

    def on_start(self):
        '''Creates a list of cards.'''

        for i in range(20):

```

(continues on next page)

(continued from previous page)

```

        self.root.ids.md_list.add_widget(
            SwipeToDeleteItem(text=f"One-line item {i}")
)

```

```
Example().run()
```

Declarative python styles

```

from kivymd.app import MDApp
from kivymd.uix.boxlayout import MDBBoxLayout
from kivymd.uix.card import (
    MDCardSwipe, MDCardSwipeLayerBox, MDCardSwipeFrontBox
)
from kivymd.uix.list import MDList, OneLineListItem
from kivymd.uix.screen import MDScreen
from kivymd.uix.scrollview import MDScrollView
from kivymd.uix.toolbar import MDTopAppBar


class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return (
            MDScreen(
                MDBBoxLayout(
                    MDTopAppBar(
                        elevation=4,
                        title="MDCardSwipe",
                    ),
                    MDScrollView(
                        MDList(
                            id="md_list",
                        ),
                        id="scroll",
                        scroll_timeout=100,
                    ),
                    id="box",
                    orientation="vertical",
                ),
            )
        )

    def on_start(self):
        '''Creates a list of cards.'''

        for i in range(20):
            self.root.ids.box.ids.scroll.ids.md_list.add_widget(
                MDCardSwipe(
                    MDCardSwipeLayerBox(),
                    MDCardSwipeFrontBox(

```

(continues on next page)

(continued from previous page)

```
        OneLineListItem(  
            id="content",  
            text=f"One-line item {i}",  
            _no_ripple_effect=True,  
        )  
,  
        size_hint_y=None,  
        height="52dp",  
)  
)
```

```
Example().run()
```

### Binding a swipe to one of the sides of the screen

```
<SwipeToDeleteItem>  
    # By default, the parameter is "left"  
    anchor: "right"
```

---

**Note:** You cannot use the left and right swipe at the same time.

---

### Swipe behavior

```
<SwipeToDeleteItem>  
    # By default, the parameter is "hand"  
    type_swipe: "hand"
```

```
<SwipeToDeleteItem>:  
    type_swipe: "auto"
```

### Removing an item using the type\_swipe = "auto" parameter

The map provides the `MDCardSwipe.on_swipe_complete` event. You can use this event to remove items from a list:  
 Declarative KV styles

```
<SwipeToDeleteItem>:
    on_swipe_complete: app.on_swipe_complete(root)
```

Declarative python styles

```
.. code-block:: python

    MDCardSwipe(
        ...
        on_swipe_complete=self.on_swipe_complete,
    )
```

Imperative python styles

```
def on_swipe_complete(self, instance):
    self.root.ids.md_list.remove_widget(instance)
```

Decorative python styles

```
def on_swipe_complete(self, instance):
    self.root.ids.box.ids.scroll.ids.md_list.remove_widget(instance)
```

### Add content to the bottom layer of the card

To add content to the bottom layer of the card, use the `MDCardSwipeLayerBox` class.

```
<SwipeToDeleteItem>:

    MDCardSwipeLayerBox:
        padding: "8dp"

        MDIconButton:
            icon: "trash-can"
            pos_hint: {"center_y": .5}
            on_release: app.remove_item(root)
```

**End full code**

Declarative KV styles

```
from kivy.lang import Builder
from kivy.properties import StringProperty

from kivymd.app import MDApp
from kivymd.uix.card import MDCardSwipe

KV = '''
<SwipeToDeleteItem>:
    size_hint_y: None
    height: content.height

    MDCardSwipeLayerBox:
        padding: "8dp"

        MDIconButton:
            icon: "trash-can"
            pos_hint: {"center_y": .5}
            on_release: app.remove_item(root)

    MDCardSwipeFrontBox:

        OneLineListItem:
            id: content
            text: root.text
            _no_ripple_effect: True

MDScreen:

    MDBBoxLayout:
        orientation: "vertical"

        MDTopAppBar:
            elevation: 4
            title: "MDCardSwipe"

        MDScrollView:

            MDList:
                id: md_list
                padding: 0
    ...

class SwipeToDeleteItem(MDCardSwipe):
    text = StringProperty()

class Example(MDApp):
```

(continues on next page)

(continued from previous page)

```

def __init__(self, **kwargs):
    super().__init__(**kwargs)
    self.theme_cls.theme_style = "Dark"
    self.theme_cls.primary_palette = "Orange"
    self.screen = Builder.load_string(KV)

def build(self):
    return self.screen

def remove_item(self, instance):
    self.screen.ids.md_list.remove_widget(instance)

def on_start(self):
    for i in range(20):
        self.screen.ids.md_list.add_widget(
            SwipeToDeleteItem(text=f"One-line item {i}")
    )

```

Example().run()

Decorative python styles

```

from kivymd.app import MDApp
from kivymd.uix.boxlayout import MDBBoxLayout
from kivymd.uix.button import MDIconButton
from kivymd.uix.card import (
    MDCardSwipe, MDCardSwipeLayerBox, MDCardSwipeFrontBox
)
from kivymd.uix.list import MDList, OneLineListItem
from kivymd.uix.screen import MDScreen
from kivymd.uix.scrollview import MDScrollView
from kivymd.uix.toolbar import MDTopAppBar


class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return (
            MDScreen(
                MDBBoxLayout(
                    MDTopAppBar(
                        elevation=4,
                        title="MDCardSwipe",
                    ),
                    MDScrollView(
                        MDList(
                            id="md_list",
                        ),
                        id="scroll",
                        scroll_timeout=100,

```

(continues on next page)

(continued from previous page)

```

        ),
        id="box",
        orientation="vertical",
    ),
)
)

def on_start(self):
    '''Creates a list of cards.'''

    for i in range(20):
        self.root.ids.box.ids.scroll.ids.md_list.add_widget(
            MDCardSwipe(
                MDCardSwipeLayerBox(
                    MDIconButton(
                        icon="trash-can",
                        pos_hint={"center_y": 0.5},
                        on_release=self.remove_item,
                    ),
                ),
                MDCardSwipeFrontBox(
                    OneLineListItem(
                        id="content",
                        text=f"One-line item {i}",
                        _no_ripple_effect=True,
                    )
                ),
                size_hint_y=None,
                height="52dp",
            )
        )

def remove_item(self, instance):
    self.root.ids.box.ids.scroll.ids.md_list.remove_widget(
        instance.parent.parent
    )

```

Example().run()

## Focus behavior

<b>MDCard:</b>
focus_behavior: True

Declarative KV styles

from kivy.lang import Builder
-------------------------------

(continues on next page)

(continued from previous page)

```

from kivymd.app import MDApp

KV = """
MDScreen:

    MDCard:
        size_hint: .7, .4
        focus_behavior: True
        pos_hint: {"center_x": .5, "center_y": .5}
        md_bg_color: "darkgrey"
        unfocus_color: "darkgrey"
        focus_color: "grey"
        elevation: 6
    ...
}

class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        return Builder.load_string(KV)

Example().run()

```

Declarative python styles

```

from kivymd.app import MDApp
from kivymd.uix.card import MDCard
from kivymd.uix.screen import MDScreen


class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        return (
            MDScreen(
                MDCard(
                    size_hint=(0.7, 0.4),
                    focus_behavior=True,
                    pos_hint={"center_x": 0.5, "center_y": 0.5},
                    md_bg_color="darkgrey",
                    unfocus_color="darkgrey",
                    focus_color="grey",
                    elevation=6,
                ),
            )
        )

```

Example().run()

## Ripple behavior

```
MDCard:  
    ripple_behavior: True
```

### API - kivymd.uix.card.card

```
class kivymd.uix.card.card.MDSeparator(**kwargs)
```

A separator line.

#### color

Separator color in (r, g, b, a) or string format.

`color` is a [ColorProperty](#) and defaults to *None*.

```
on_orientation(self, *args)
```

```
class kivymd.uix.card.card.MDCard(*args, **kwargs)
```

Implements the creation and addition of child widgets as declarative programming style.

#### focus\_behavior

Using focus when hovering over a card.

`focus_behavior` is a [BooleanProperty](#) and defaults to *False*.

#### ripple\_behavior

Use ripple effect for card.

`ripple_behavior` is a [BooleanProperty](#) and defaults to *False*.

#### radius

Card radius by default.

New in version 1.0.0.

`radius` is an [VariableListProperty](#) and defaults to `[dp(6), dp(6), dp(6), dp(6)]`.

#### style

Card type.

New in version 1.0.0.

Available options are: ‘filled’, ‘elevated’, ‘outlined’.

`style` is an [OptionProperty](#) and defaults to ‘elevated’.

```
update_md_bg_color(self, instance_card, theme_style: str)
```

```
set_style(self, *args)
```

```
set_line_color(self)
```

```
set_elevation(self)
```

```
set_radius(self)
```

```
on_ripple_behavior(self, interval: Union[int, float], value_behavior: bool)
```

---

```
class kivymd.uix.card.card.MDCardSwipe(*args, **kwargs)
```

**Events****`on_swipe_complete`**

Called when a swipe of card is completed.

**`open_progress`**

Percent of visible part of side panel. The percent is specified as a floating point number in the range 0-1. 0.0 if panel is closed and 1.0 if panel is opened.

`open_progress` is a [NumericProperty](#) and defaults to *0.0*.

**`opening_transition`**

The name of the animation transition type to use when animating to the [state](#) ‘*opened*’.

`opening_transition` is a [StringProperty](#) and defaults to ‘*out\_cubic*’.

**`closing_transition`**

The name of the animation transition type to use when animating to the [state](#) ‘*closed*’.

`closing_transition` is a [StringProperty](#) and defaults to ‘*out\_sine*’.

**`closing_interval`**

Interval for closing the front layer.

New in version 1.1.0.

`closing_interval` is a [NumericProperty](#) and defaults to *0*.

**`anchor`**

Anchoring screen edge for card. Available options are: ‘*left*’, ‘*right*’.

`anchor` is a [OptionProperty](#) and defaults to *left*.

**`swipe_distance`**

The distance of the swipe with which the movement of navigation drawer begins.

`swipe_distance` is a [NumericProperty](#) and defaults to *50*.

**`opening_time`**

The time taken for the card to slide to the [state](#) ‘*open*’.

`opening_time` is a [NumericProperty](#) and defaults to *0.2*.

**`state`**

Detailed state. Sets before `state`. Bind to `state` instead of `status`. Available options are: ‘*closed*’, ‘*opened*’.

`status` is a [OptionProperty](#) and defaults to ‘*closed*’.

**`max_swipe_x`**

If, after the events of `on_touch_up` card position exceeds this value - will automatically execute the method `open_card`, and if not - will automatically be `close_card` method.

`max_swipe_x` is a [NumericProperty](#) and defaults to *0.3*.

**`max_opened_x`**

The value of the position the card shifts to when `type_swipe` s set to ‘*hand*’.

`max_opened_x` is a [NumericProperty](#) and defaults to *100dp*.

**type\_swipe**

Type of card opening when swipe. Shift the card to the edge or to a set position `max_opened_x`. Available options are: ‘auto’, ‘hand’.

`type_swipe` is a [OptionProperty](#) and defaults to `auto`.

**add\_widget(self, widget, index=0, canvas=None)**

Add a new widget as a child of this widget.

**Parameters****widget: Widget**

Widget to add to our list of children.

**index: int, defaults to 0**

Index to insert the widget in the list. Notice that the default of 0 means the widget is inserted at the beginning of the list and will thus be drawn on top of other sibling widgets. For a full discussion of the index and widget hierarchy, please see the Widgets Programming Guide.

New in version 1.0.5.

**canvas: str, defaults to None**

Canvas to add widget’s canvas to. Can be ‘before’, ‘after’ or None for the default canvas.

New in version 1.9.0.

```
>>> from kivy.uix.button import Button
>>> from kivy.uix.slider import Slider
>>> root = Widget()
>>> root.add_widget(Button())
>>> slider = Slider()
>>> root.add_widget(slider)
```

**on\_swipe\_complete(self, \*args)**

Called when a swipe of card is completed.

**on\_anchor(self, instance\_swipe\_to\_delete\_item, anchor\_value: str)****on\_open\_progress(self, instance\_swipe\_to\_delete\_item, progress\_value: float)****on\_touch\_move(self, touch)**

Receive a touch move event. The touch is in parent coordinates.

See [on\\_touch\\_down\(\)](#) for more information.

**on\_touch\_up(self, touch)**

Receive a touch up event. The touch is in parent coordinates.

See [on\\_touch\\_down\(\)](#) for more information.

**on\_touch\_down(self, touch)**

Receive a touch down event.

**Parameters****touch: MotionEvent class**

Touch received. The touch is in parent coordinates. See [relativelayout](#) for a discussion on coordinate systems.

**Returns**

bool If True, the dispatching of the touch event will stop. If False, the event will continue to be dispatched to the rest of the widget tree.

**complete\_swipe(self)**

**open\_card(self)**

**close\_card(self, \*args)**

**class kivymd.uix.card.card.MDCardSwipeFrontBox(\*args, \*\*kwargs)**

Implements the creation and addition of child widgets as declarative programming style.

**class kivymd.uix.card.card.MDCardSwipeLayerBox(\*args, \*\*kwargs)**

Box layout class.


For more information, see in the [BoxLayout](#) class documentation.

### 2.3.32 Selection

#### See also:

[Material Design spec, Banner](#)

**Selection refers to how users indicate specific items they intend to take action on.**

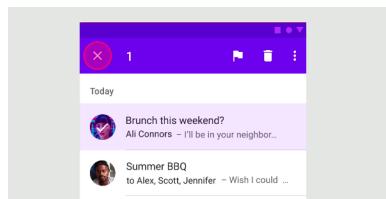

#### Entering selection mode

To select an item and enter selection mode, long press the item:

#### Exiting selection mode

To exit selection mode, tap each selected item until they're all deselected:

## Larger selections

---

**Note:** This feature is missing yet.

---

## Events

```
def on_selected(self, instance_selection_list, instance_selection_item):
    '''Called when a list item is selected.'''
    pass

def on_unselected(self, instance_selection_list, instance_selection_item):
    '''Called when a list item is unselected.'''
    pass
```

## Example with TwoLineAvatarListItem

```
from kivy.animation import Animation
from kivy.lang import Builder
from kivy.utils import get_color_from_hex

from kivymd.app import MDApp
from kivymd.uix.list import TwoLineAvatarListItem

KV = '''
<MyItem>
    text: "Two-line item with avatar"
    secondary_text: "Secondary text here"
    _no_ripple_effect: True

    ImageLeftWidget:
        source: "data/logo/kivy-icon-256.png"

MDBBoxLayout:
    orientation: "vertical"

    MDTopAppBar:
        id: toolbar
        title: "Inbox"
        left_action_items: [["menu"]]
        right_action_items: [["magnify"], ["dots-vertical"]]
        md_bg_color: 0, 0, 0, 1

    MDBBoxLayout:
        padding: "24dp", "8dp", 0, "8dp"
        adaptive_size: True

        MDLabel:
            text: "Today"
            adaptive_size: True
```

(continues on next page)

(continued from previous page)

```

ScrollView:

    MDSelectionList:
        id: selection_list
        spacing: "12dp"
        overlay_color: app.overlay_color[:-1] + [.2]
        icon_bg_color: app.overlay_color
        on_selected: app.on_selected(*args)
        on_unselected: app.on_unselected(*args)
        on_selected_mode: app.set_selection_mode(*args)
    ...

class MyItem(TwoLineAvatarListItem):
    pass


class Example(MDApp):
    overlay_color = get_color_from_hex("#6042e4")

    def build(self):
        return Builder.load_string(KV)

    def on_start(self):
        for i in range(10):
            self.root.ids.selection_list.add_widget(MyItem())

    def set_selection_mode(self, instance_selection_list, mode):
        if mode:
            md_bg_color = self.overlay_color
            left_action_items = [
                [
                    "close",
                    lambda x: self.root.ids.selection_list.unselected_all(),
                ]
            ]
            right_action_items = [["trash-can"], ["dots-vertical"]]
        else:
            md_bg_color = (0, 0, 0, 1)
            left_action_items = [["menu"]]
            right_action_items = [["magnify"], ["dots-vertical"]]
            self.root.ids.toolbar.title = "Inbox"

        Animation(md_bg_color=md_bg_color, d=0.2).start(self.root.ids.toolbar)
        self.root.ids.toolbar.left_action_items = left_action_items
        self.root.ids.toolbar.right_action_items = right_action_items

    def on_selected(self, instance_selection_list, instance_selection_item):
        self.root.ids.toolbar.title = str(
            len(instance_selection_list.get_selected_list_items())
    )

```

(continues on next page)

(continued from previous page)

```
def on_unselected(self, instance_selection_list, instance_selection_item):
    if instance_selection_list.get_selected_list_items():
        self.root.ids.toolbar.title = str(
            len(instance_selection_list.get_selected_list_items())
    )
```

Example().run()

### Example with FitImage

```
from kivy.animation import Animation
from kivy.lang import Builder
from kivy.properties import ColorProperty

from kivymd.app import MDApp
from kivymd.uix.fitimage import FitImage

KV = '''
MDBoxLayout:
    orientation: "vertical"
    md_bg_color: app.theme_cls.bg_light

    MDTopAppBar:
        id: toolbar
        title: "Inbox"
        left_action_items: [["menu"]]
        right_action_items: [["magnify"], ["dots-vertical"]]
        md_bg_color: app.theme_cls.bg_light
        specific_text_color: 0, 0, 0, 1

    MDBoxLayout:
        padding: "24dp", "8dp", 0, "8dp"
        adaptive_size: True

        MDLabel:
            text: "Today"
            adaptive_size: True

    ScrollView:

        MDSelectionList:
            id: selection_list
            padding: "24dp", 0, "24dp", "24dp"
            cols: 3
            spacing: "12dp"
            overlay_color: app.overlay_color[:-1] + [.2]
            icon_bg_color: app.overlay_color
```

(continues on next page)

(continued from previous page)

```

progress_round_color: app.progress_round_color
on_selected: app.on_selected(*args)
on_unselected: app.on_unselected(*args)
on_selected_mode: app.set_selection_mode(*args)
...
```
class Example(MDApp):
    overlay_color = ColorProperty("#6042e4")
    progress_round_color = "#ef514b"

    def build(self):
        return Builder.load_string(KV)

    def on_start(self):
        for i in range(10):
            self.root.ids.selection_list.add_widget(
                FitImage(
                    source="image.png",
                    size_hint_y=None,
                    height="240dp",
                )
            )

    def set_selection_mode(self, instance_selection_list, mode):
        if mode:
            md_bg_color = self.overlay_color
            left_action_items = [
                [
                    "close",
                    lambda x: self.root.ids.selection_list.unselected_all(),
                ]
            ]
            right_action_items = [["trash-can"], ["dots-vertical"]]
        else:
            md_bg_color = (1, 1, 1, 1)
            left_action_items = [["menu"]]
            right_action_items = [["magnify"], ["dots-vertical"]]
            self.root.ids.toolbar.title = "Inbox"

        Animation(md_bg_color=md_bg_color, d=0.2).start(self.root.ids.toolbar)
        self.root.ids.toolbar.left_action_items = left_action_items
        self.root.ids.toolbar.right_action_items = right_action_items

    def on_selected(self, instance_selection_list, instance_selection_item):
        self.root.ids.toolbar.title = str(
            len(instance_selection_list.get_selected_list_items())
        )

    def on_unselected(self, instance_selection_list, instance_selection_item):
        if instance_selection_list.get_selected_list_items():
            self.root.ids.toolbar.title = str(
```

```

(continues on next page)

(continued from previous page)

```
    len(instance_selection_list.get_selected_list_items())
)
```

```
Example().run()
```

## API - kivymd.uix.selection.selection

```
class kivymd.uix.selection.selection.MDSelectionList(**kwargs)
```

### Events

#### *on\_selected*

Called when a list item is selected.

#### *on\_unselected*

Called when a list item is unselected.

#### **selected\_mode**

List item selection mode. If *True* when clicking on a list item, it will be selected.

*selected\_mode* is an `BooleanProperty` and defaults to *False*.

#### **icon**

Name of the icon with which the selected list item will be marked.

*icon* is an `StringProperty` and defaults to ‘check’.

#### **icon\_pos**

The position of the icon that will mark the selected list item.

*icon\_pos* is an `ListProperty` and defaults to `[]`.

#### **icon\_bg\_color**

Background color in (r, g, b, a) or string format of the icon that will mark the selected list item.

*icon\_bg\_color* is an `ColorProperty` and defaults to `[1, 1, 1, 1]`.

#### **icon\_check\_color**

Color in (r, g, b, a) or string format of the icon that will mark the selected list item.

*icon\_check\_color* is an `ColorProperty` and defaults to `[1, 1, 1, 1]`.

#### **overlay\_color**

The overlay color in (r, g, b, a) or string format of the selected list item.

*overlay\_color* is an `ColorProperty` and defaults to `[0, 0, 0, 0.2]`.

#### **progress\_round\_size**

Size of the spinner for switching of *selected\_mode* mode.

*progress\_round\_size* is an `NumericProperty` and defaults to `dp(46)`.

**progress\_round\_color**

Color in (r, g, b, a) or string format of the spinner for switching of *selected\_mode* mode.

*progress\_round\_color* is an `NumericProperty` and defaults to `None`.

**add\_widget(self, widget, index=0, canvas=None)**

Add a new widget as a child of this widget.

**Parameters****widget: Widget**

Widget to add to our list of children.

**index: int, defaults to 0**

Index to insert the widget in the list. Notice that the default of 0 means the widget is inserted at the beginning of the list and will thus be drawn on top of other sibling widgets. For a full discussion of the index and widget hierarchy, please see the Widgets Programming Guide.

New in version 1.0.5.

**canvas: str, defaults to None**

Canvas to add widget's canvas to. Can be 'before', 'after' or None for the default canvas.

New in version 1.9.0.

```
>>> from kivy.uix.button import Button
>>> from kivy.uix.slider import Slider
>>> root = Widget()
>>> root.add_widget(Button())
>>> slider = Slider()
>>> root.add_widget(slider)
```

**get\_selected(self)**

Returns True if at least one item in the list is checked.

**get\_selected\_list\_items(self)**

Returns a list of marked objects:

[<kivymd.uix.selection.SelectionItem object>, ...]

**unselected\_all(self)****selected\_all(self)****on\_selected(self, \*args)**

Called when a list item is selected.

**on\_unselected(self, \*args)**


Called when a list item is unselected.

### 2.3.33 DatePicker

See also:

Material Design spec, Date picker

Includes date picker.

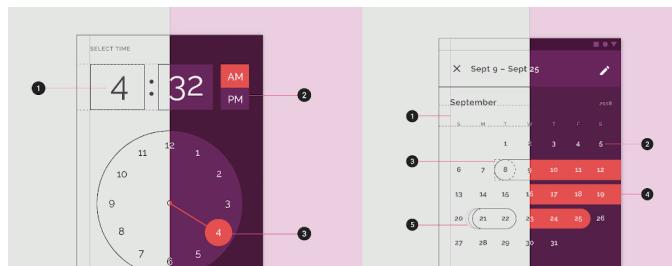

### Usage

Declarative KV style

```
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.pickers import MDDatePicker

KV = """
MDFloatLayout:

    MDRaisedButton:
        text: "Open date picker"
        pos_hint: {'center_x': .5, 'center_y': .5}
        on_release: app.show_date_picker()
"""

class Test(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return Builder.load_string(KV)

    def on_save(self, instance, value, date_range):
        """
        Events called when the "OK" dialog box button is clicked.

        :type instance: <kivymd.uix.picker.MDDatePicker object>;
        :param value: selected date;
        :type value: <class 'datetime.date'>;
        :param date_range: list of 'datetime.date' objects in the selected range;
        """

```

(continues on next page)

(continued from previous page)

```
:type date_range: <class 'list'>;
'''

print(instance, value, date_range)

def on_cancel(self, instance, value):
    '''Events called when the "CANCEL" dialog box button is clicked.'''

def show_date_picker(self):
    date_dialog = MDDatePicker()
    date_dialog.bind(on_save=self.on_save, on_cancel=self.on_cancel)
    date_dialog.open()

Test().run()
```

Declarative python style

```
from kivymd.app import MDApp
from kivymd.uix.button import MDRaisedButton
from kivymd.uix.pickers import MDDatePicker
from kivymd.uix.screen import MDScreen


class Test(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return (
            MDScreen(
                MDRaisedButton(
                    text="Open data picker",
                    pos_hint={'center_x': .5, 'center_y': .5},
                    on_release=self.show_date_picker,
                )
            )
        )

    def on_save(self, instance, value, date_range):
        '''
        Events called when the "OK" dialog box button is clicked.

        :type instance: <kivymd.uix.picker.MDDatePicker object>;
        :param value: selected date;
        :type value: <class 'datetime.date'>;
        :param date_range: list of 'datetime.date' objects in the selected range;
        :type date_range: <class 'list'>;
        '''

        print(instance, value, date_range)
```


(continues on next page)

(continued from previous page)

```
def on_cancel(self, instance, value):
    '''Events called when the "CANCEL" dialog box button is clicked.'''
    pass


def show_date_picker(self, *args):
    date_dialog = MDDatePicker()
    date_dialog.bind(on_save=self.on_save, on_cancel=self.on_cancel)
    date_dialog.open()
```

Test().run()

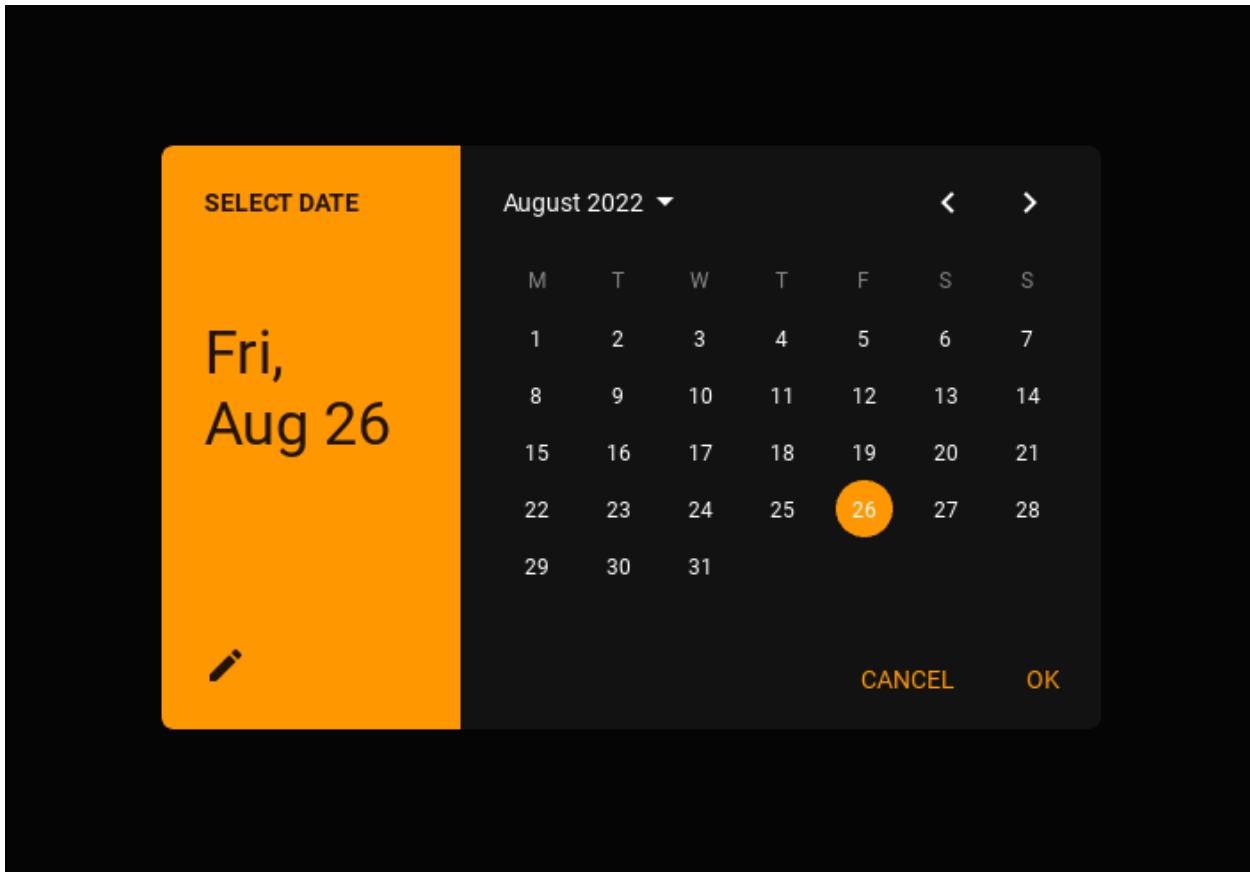

### Open date dialog with the specified date


```
def show_date_picker(self):
    date_dialog = MDDatePicker(year=1983, month=4, day=12)
    date_dialog.open()
```

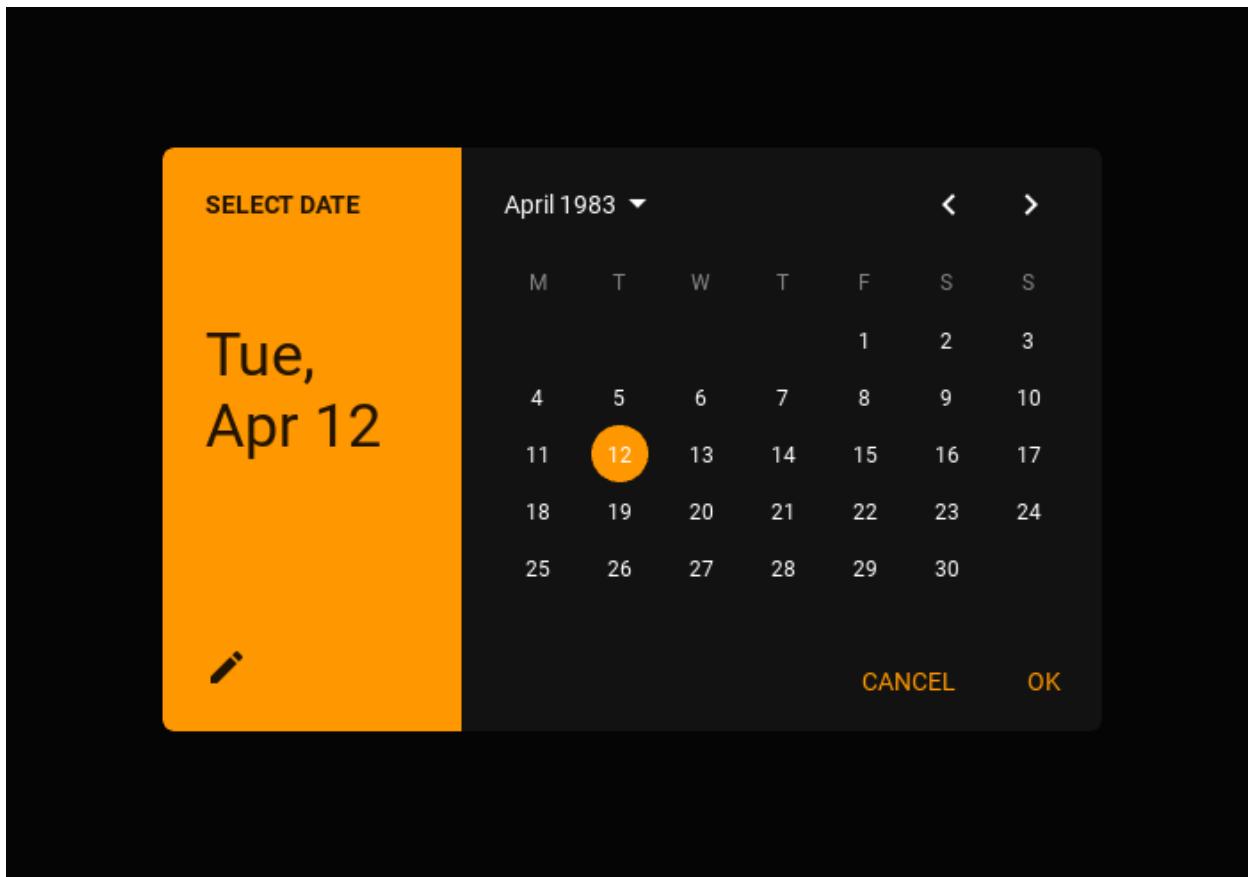

### Interval date

You can set the time interval from and to the set date. All days of the week that are not included in this range will have the status *disabled*.

```
def show_date_picker(self):
    date_dialog = MDDatePicker(
        min_date=datetime.date.today(),
        max_date=datetime.date(
            datetime.date.today().year,
            datetime.date.today().month,
            datetime.date.today().day + 2,
        ),
    )
    date_dialog.open()
```

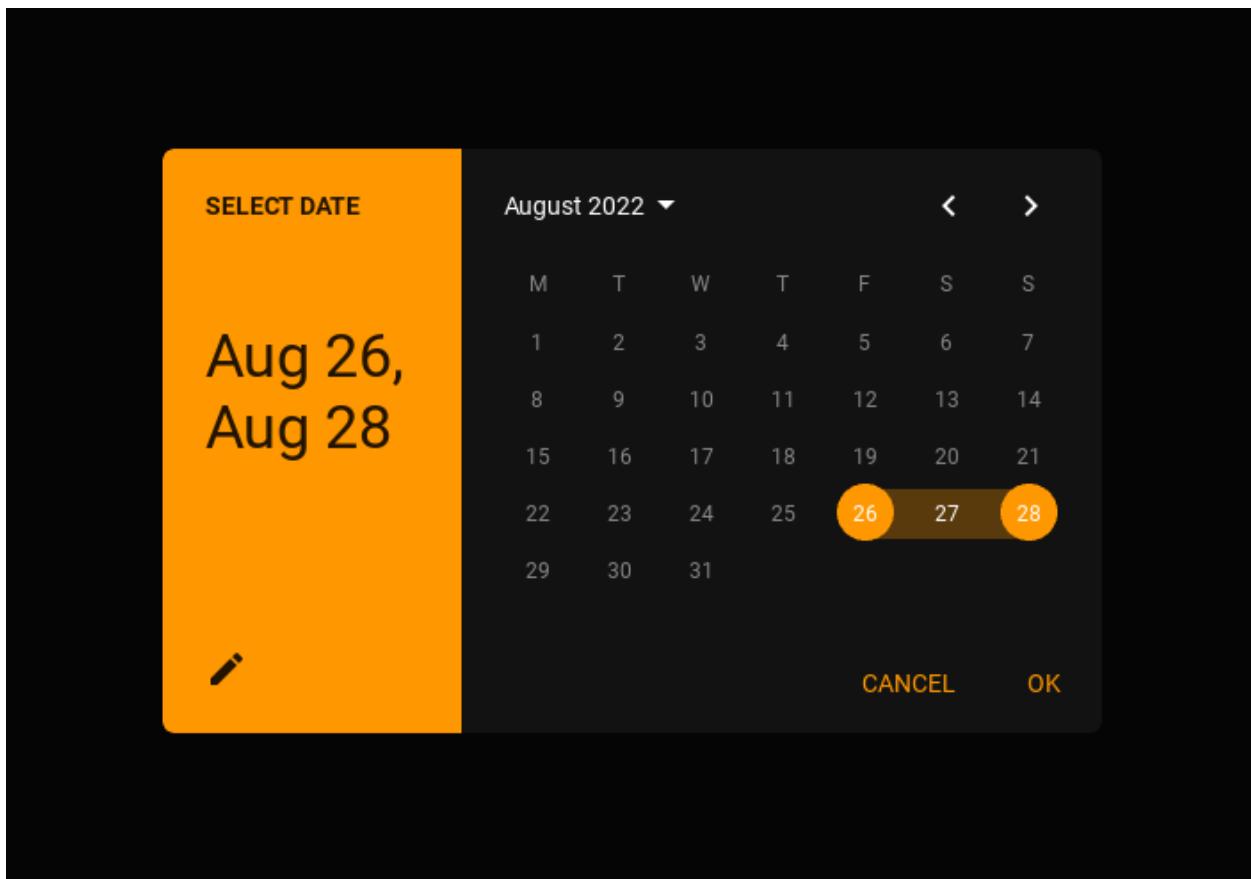


The range of available dates can be changed in the picker dialog:

### Select year

**Warning:** The list of years when opening is not automatically set to the current year.

You can set the range of years using the `min_year` and `max_year` attributes:

```
def show_date_picker(self):
    date_dialog = MDDatePicker(min_year=2022, max_year=2030)
    date_dialog.open()
```

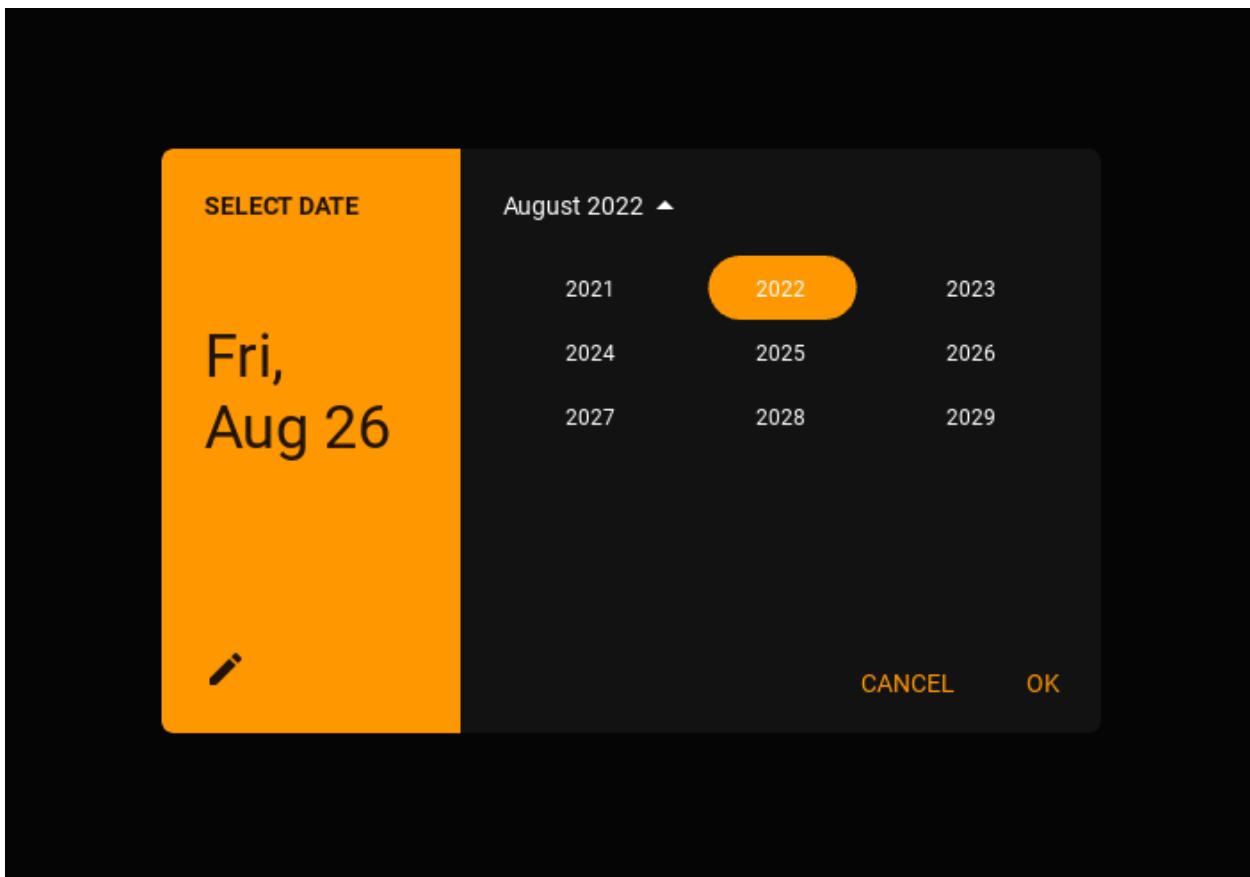

**Set and select a date range**

```
def show_date_picker(self):
    date_dialog = MDDatePicker(mode="range")
    date_dialog.open()
```

#### API - kivymd.uix.pickers.datepicker.datepicker

```
class kivymd.uix.pickers.datepicker.datepicker.BaseDialogPicker(**kwargs)
Base class for MDDatePicker and MDTimePicker classes.
```

##### Events

###### *on\_save*

Events called when the “OK” dialog box button is clicked.


###### *on\_cancel*

Events called when the “CANCEL” dialog box button is clicked.

###### **title\_input**

Dialog title for input date.

```
MDDatePicker(title_input="INPUT DATE")
```

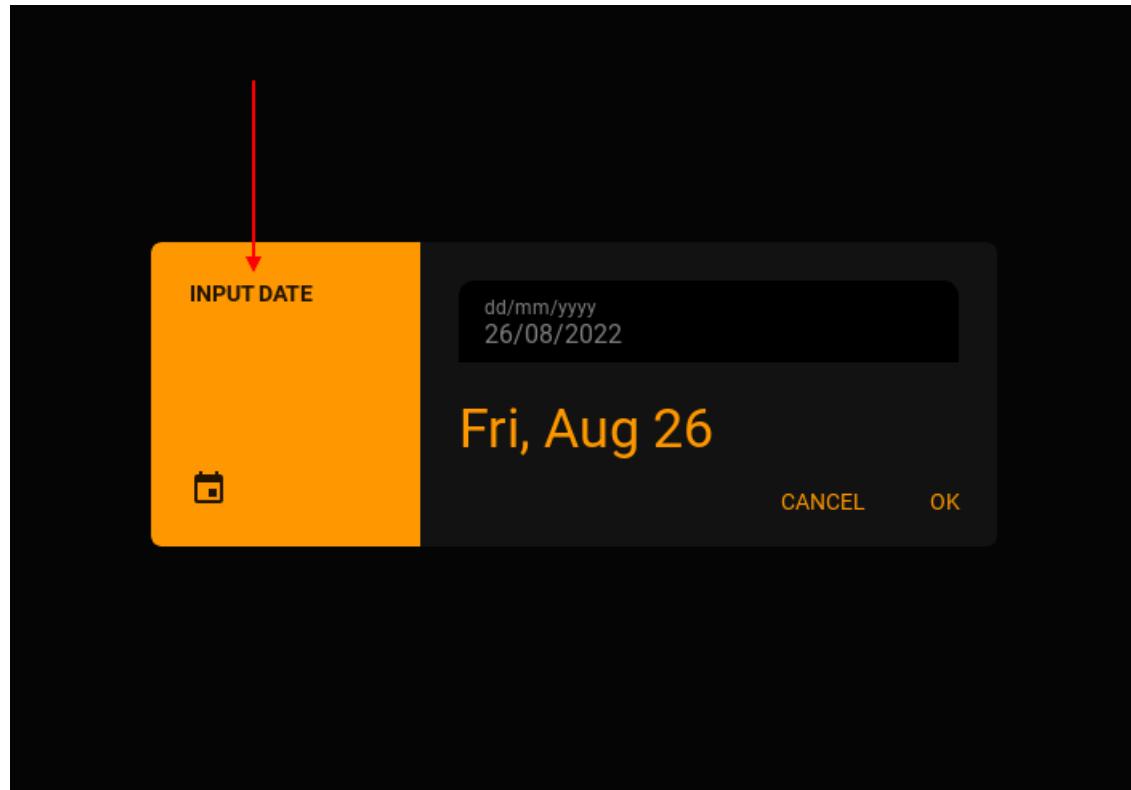


`title_input` is an `StringProperty` and defaults to *INPUT DATE*.

**title**

Dialog title for select date.

```
MDDatePicker(title="SELECT DATE")
```

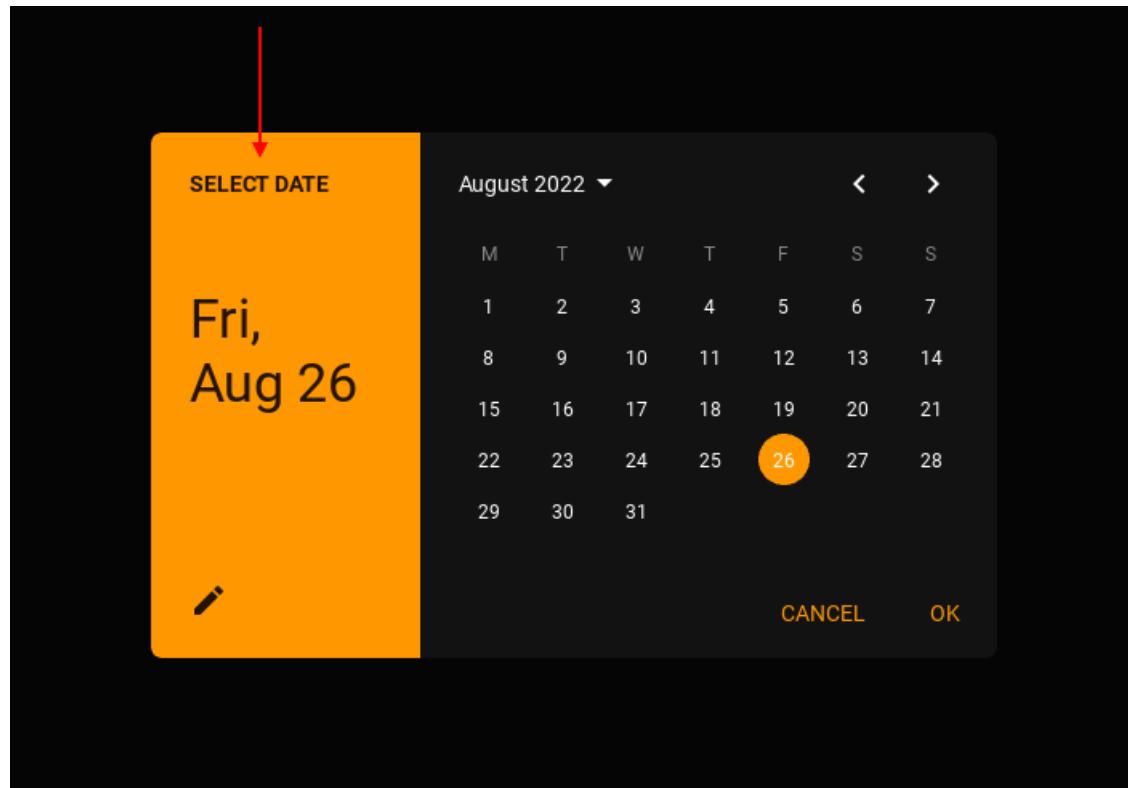


`title` is an `StringProperty` and defaults to `SELECT DATE`.

#### radius

Radius list for the four corners of the dialog.

```
MDDatePicker(radius=[7, 7, 7, 26])
```

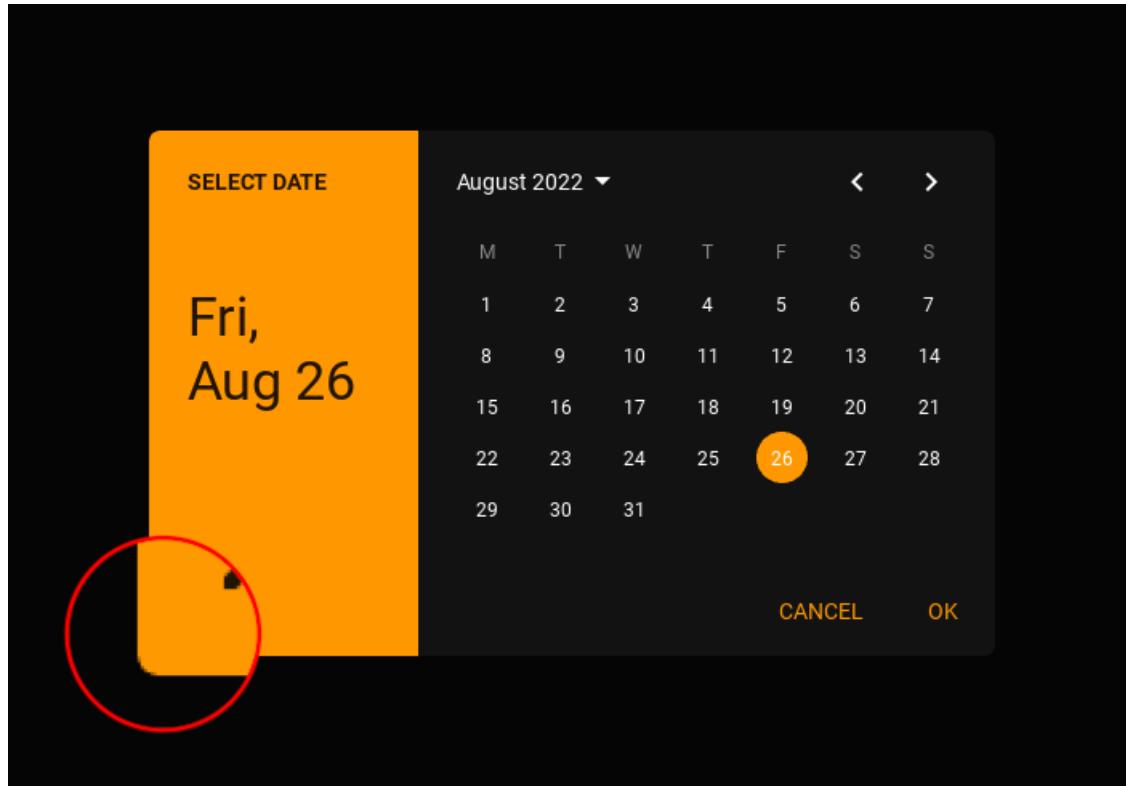


*radius* is an [ListProperty](#) and defaults to [7, 7, 7, 7].

#### primary\_color

Background color of toolbar in (r, g, b, a) or string format.

```
MDDatePicker(primary_color="brown")
```

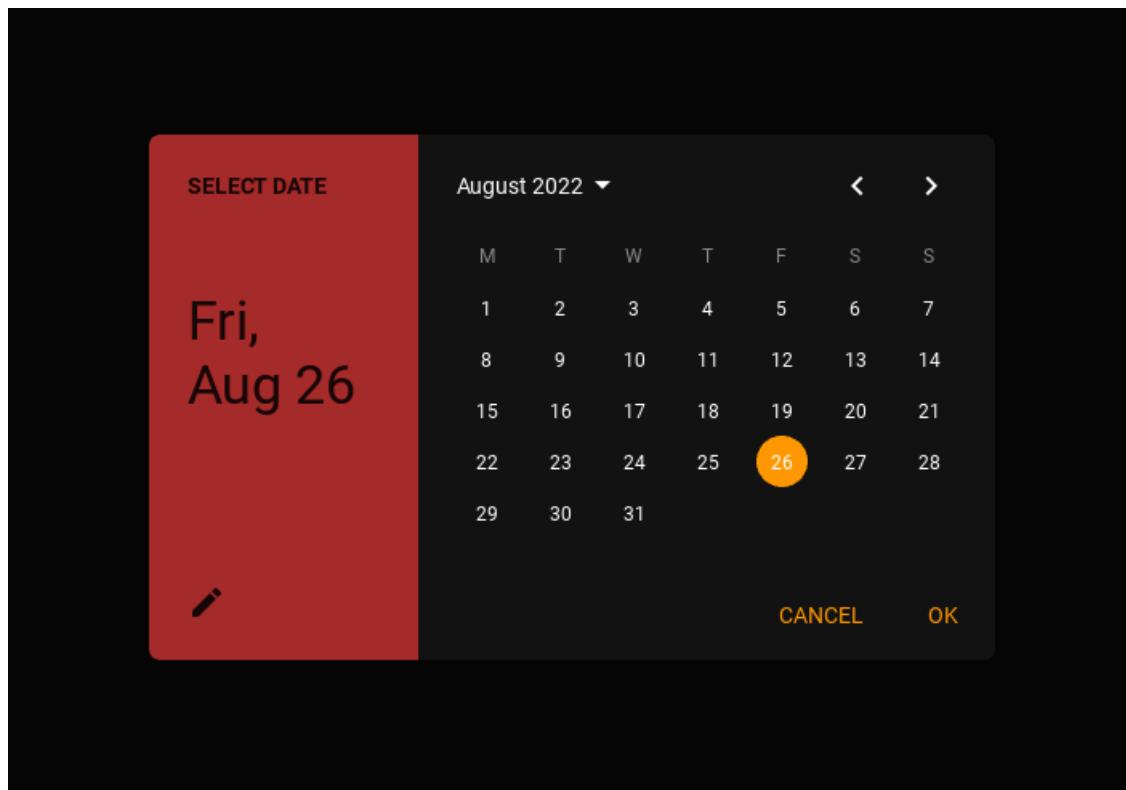


`primary_color` is an `ColorProperty` and defaults to `None`.

#### accent\_color

Background color of calendar/clock face in (r, g, b, a) or string format.

```
MDDatePicker(  
    primary_color="brown",  
    accent_color="darkred",  
)
```

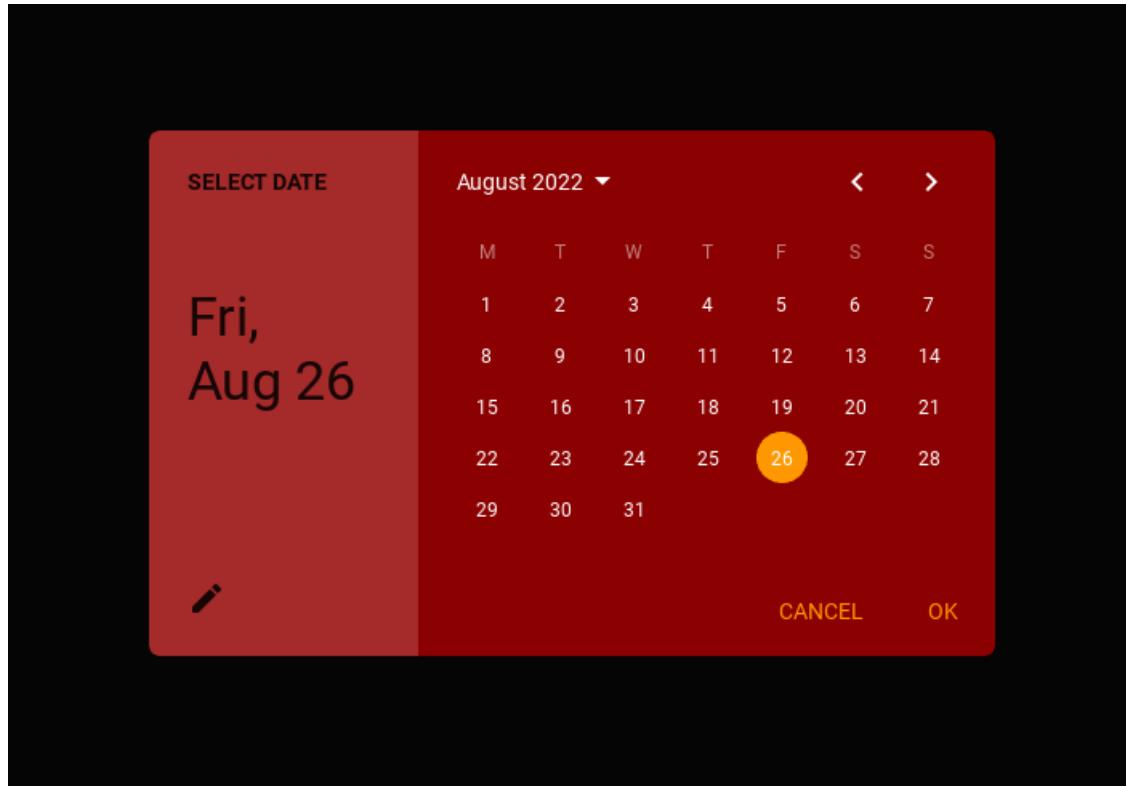


`accent_color` is an [ColorProperty](#) and defaults to *None*.

#### **selector\_color**

Background color of the selected day of the month or hour in (r, g, b, a) or string format.

```
MDDatePicker(  
    primary_color="brown",  
    accent_color="darkred",  
    selector_color="red",  
)
```

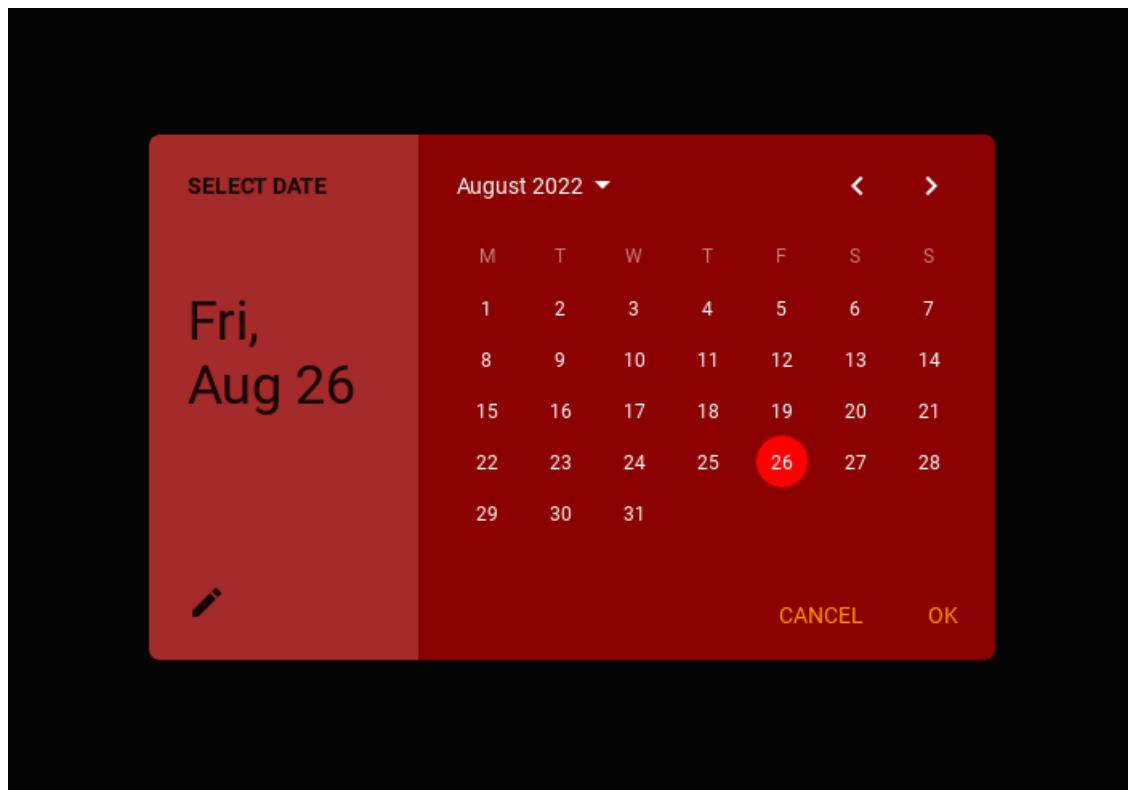


`selector_color` is an [ColorProperty](#) and defaults to *None*.

#### **text\_toolbar\_color**

Color of labels for text on a toolbar in (r, g, b, a) or string format.

```
MDDatePicker(  
    primary_color="brown",  
    accent_color="darkred",  
    selector_color="red",  
    text_toolbar_color="lightgrey",  
)
```

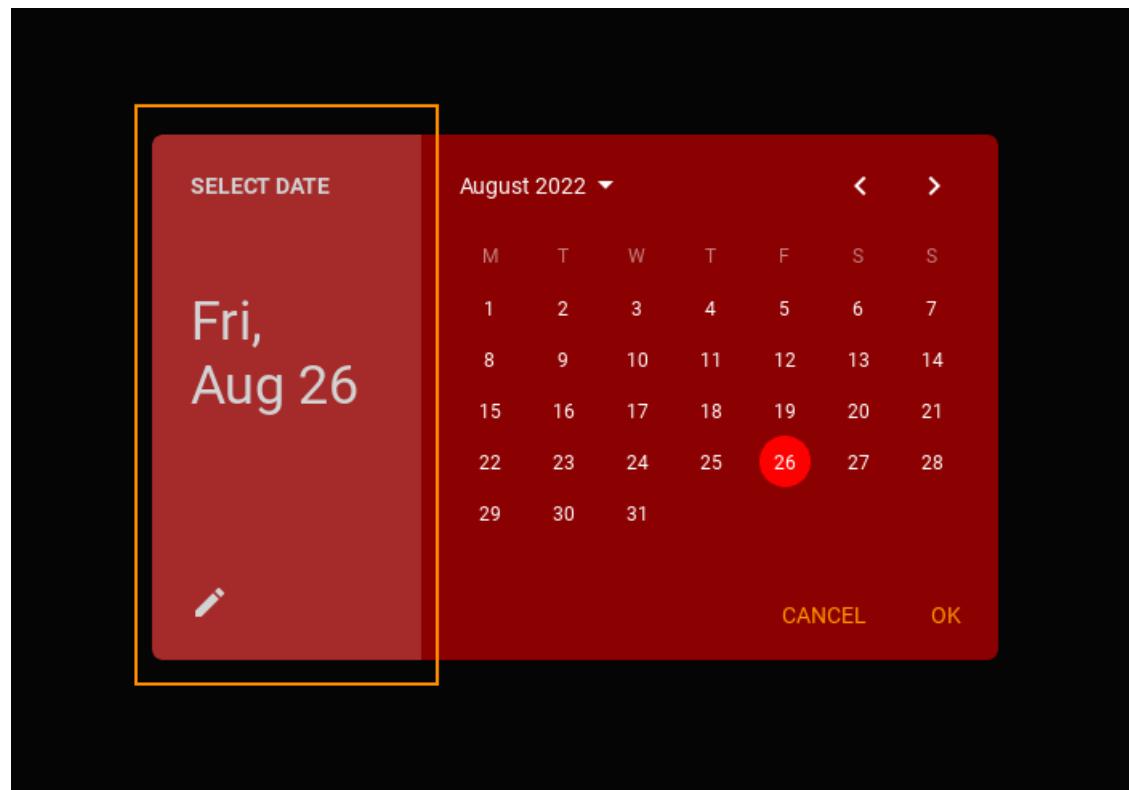


`text_toolbar_color` is an `ColorProperty` and defaults to `None`.

#### **text\_color**

Color of text labels in calendar/clock face in (r, g, b, a) or string format.

```
MDDatePicker(  
    primary_color="brown",  
    accent_color="darkred",  
    selector_color="red",  
    text_toolbar_color="lightgrey",  
    text_color="orange",  
)
```

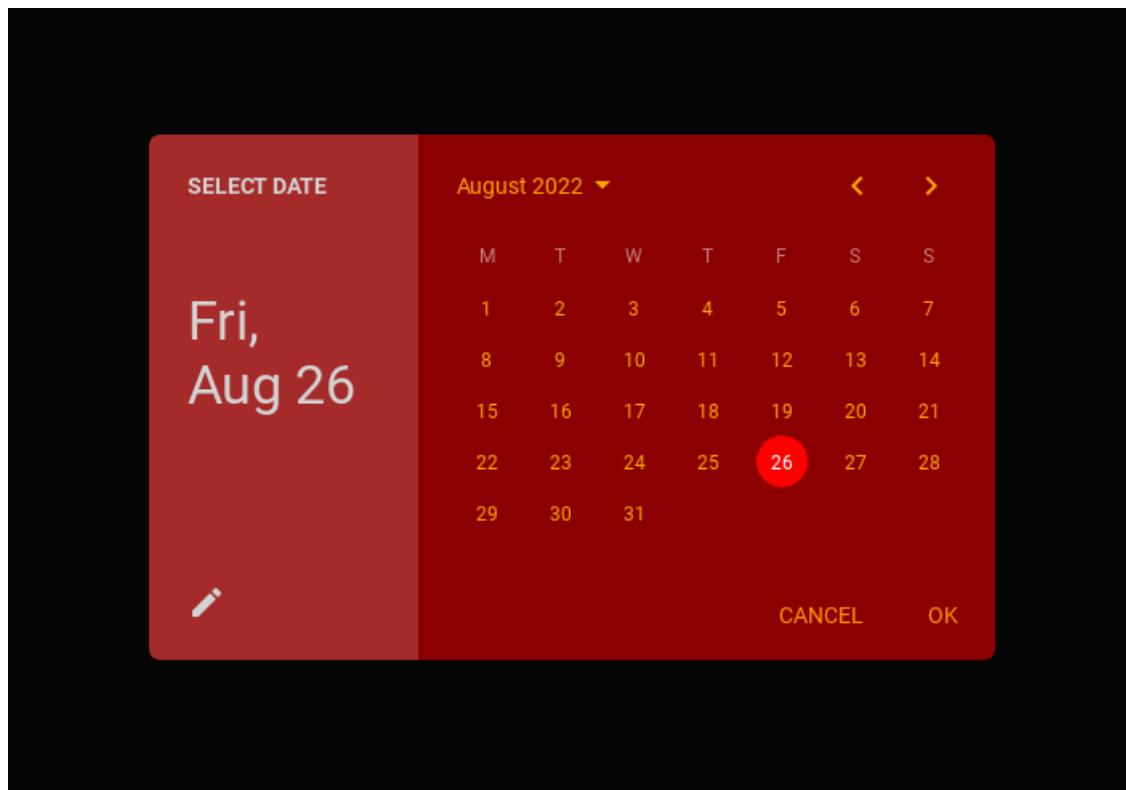


`text_color` is an [ColorProperty](#) and defaults to *None*.

#### **text\_current\_color**

Color of the text of the current day of the month/hour in (r, g, b, a) or string format.

```
MDDatePicker(  
    primary_color="brown",  
    accent_color="darkred",  
    selector_color="red",  
    text_toolbar_color="lightgrey",  
    text_color="orange",  
    text_current_color="white",  
)
```

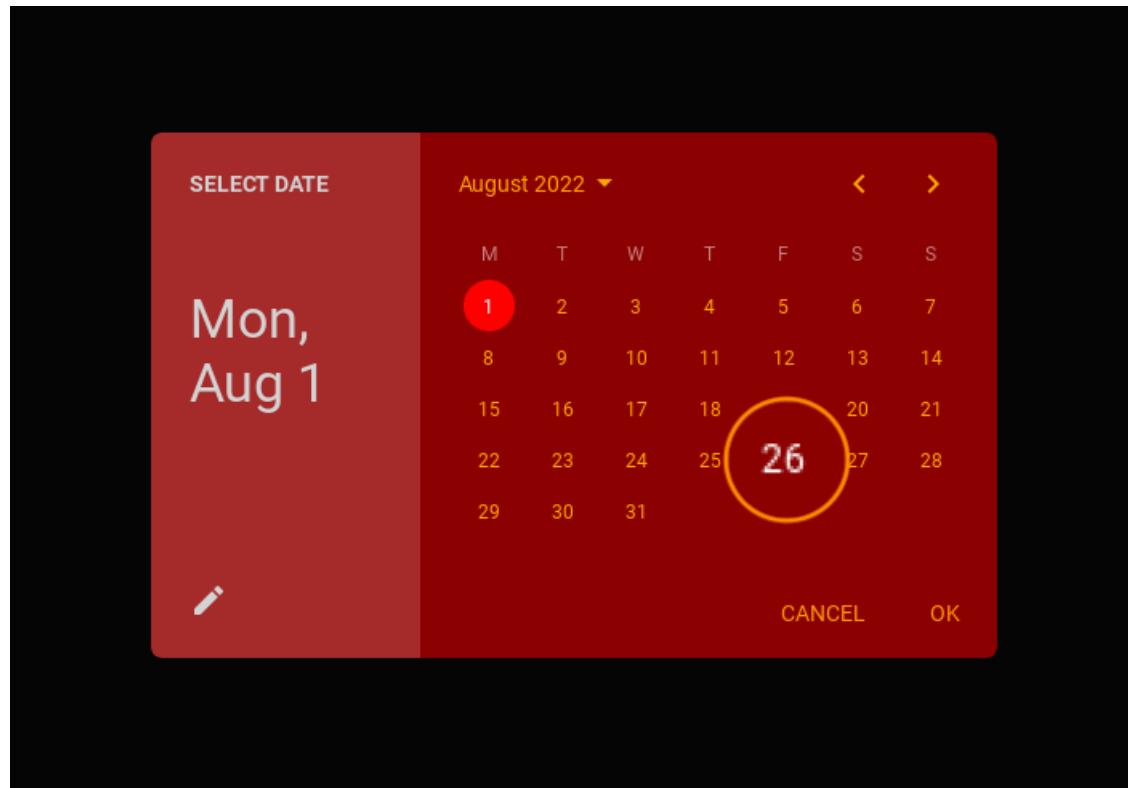


`text_current_color` is an `ColorProperty` and defaults to `None`.

#### `text_button_color`

Text button color in (r, g, b, a) format.

```
MDDatePicker(  
    primary_color="brown",  
    accent_color="darkred",  
    selector_color="red",  
    text_toolbar_color="lightgrey",  
    text_color="orange",  
    text_current_color="white",  
    text_button_color="lightgrey",  
)
```

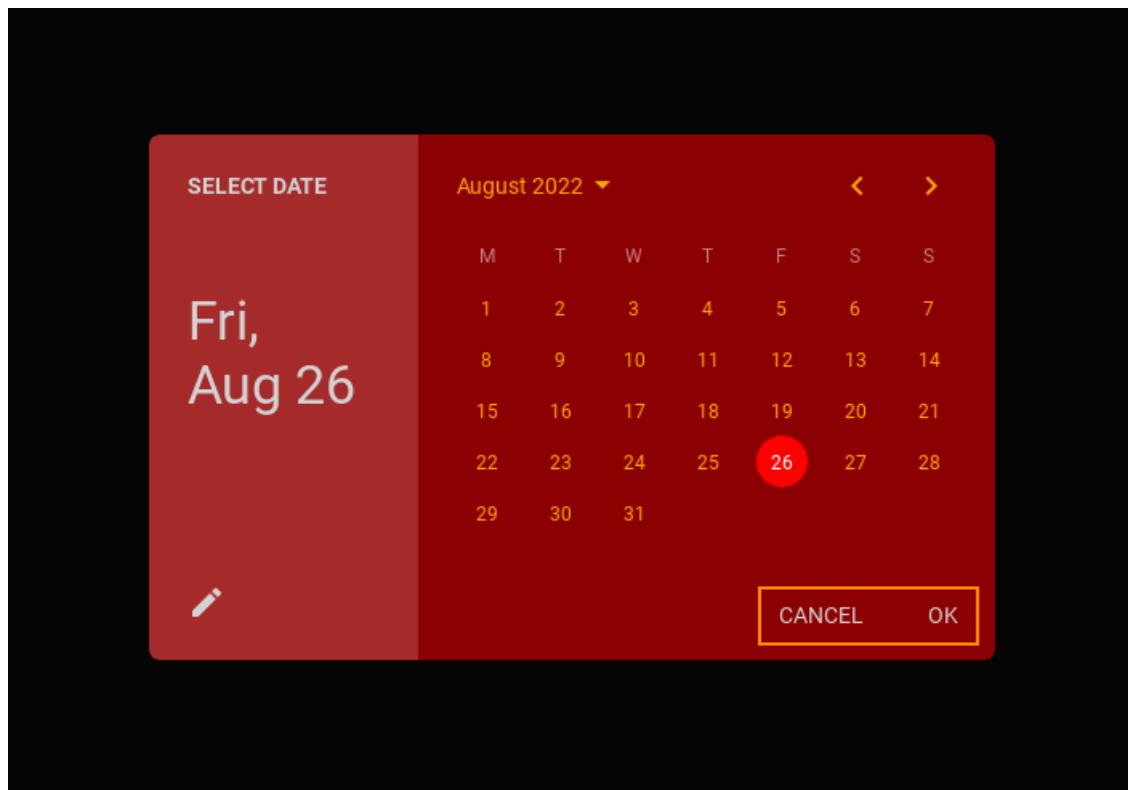


`text_button_color` is an [ColorProperty](#) and defaults to *None*.

#### **input\_field\_background\_color\_normal**

Background color normal of input fields in (r, g, b, a) or string format.

New in version 1.1.0.

```
MDDatePicker(  
    primary_color="brown",  
    accent_color="darkred",  
    selector_color="red",  
    text_toolbar_color="lightgrey",  
    text_color="orange",  
    text_current_color="white",  
    text_button_color="lightgrey",  
    input_field_background_color_normal="coral",  
)
```

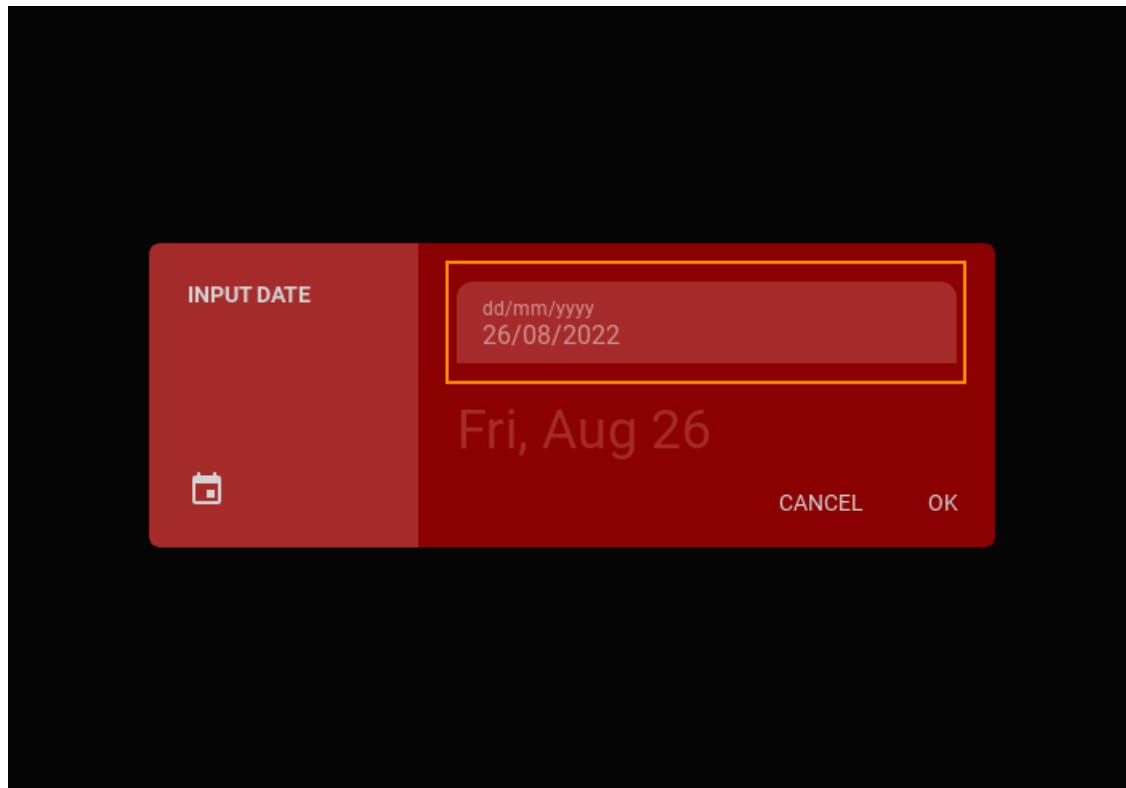


`input_field_background_color_normal` is an `ColorProperty` and defaults to `None`.

#### `input_field_background_color_focus`

Background color normal of input fields in (r, g, b, a) or string format.

New in version 1.1.0.

```
MDDatePicker(  
    primary_color="brown",  
    accent_color="darkred",  
    selector_color="red",  
    text_toolbar_color="lightgrey",  
    text_color="orange",  
    text_current_color="white",  
    text_button_color="lightgrey",  
    input_field_background_color_normal="coral",  
    input_field_background_color_focus="red",  
)
```

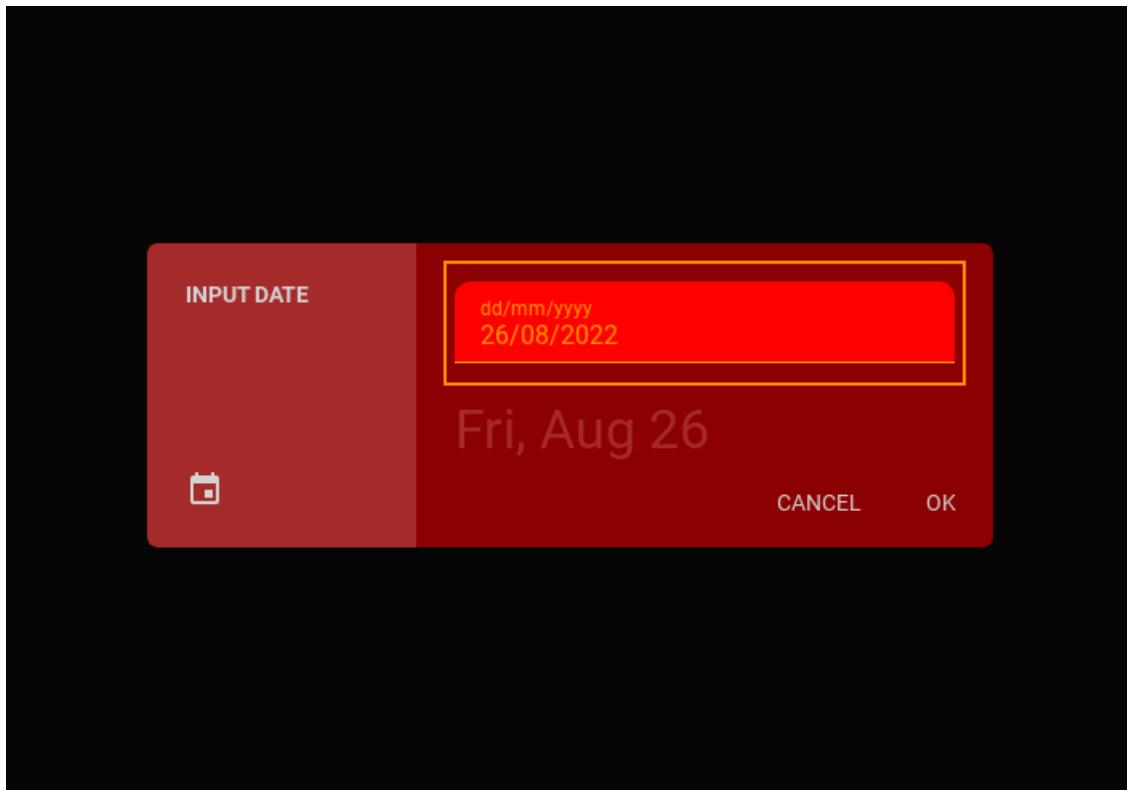

*input\_field\_background\_color\_focus* is an `ColorProperty` and defaults to `None`.

#### **input\_field\_background\_color**

Deprecated since version 1.1.0.

Use `input_field_background_color_normal` instead.

#### **input\_field\_text\_color**

Deprecated since version 1.1.0.


Use `input_field_text_color_normal` instead.

#### **input\_field\_text\_color\_normal**

Text color normal of input fields in (r, g, b, a) or string format.

New in version 1.1.0.

```
MDDatePicker(
    primary_color="brown",
    accent_color="darkred",
    selector_color="red",
    text_toolbar_color="lightgrey",
    text_color="orange",
    text_current_color="white",
    text_button_color="lightgrey",
    input_field_background_color_normal="brown",
    input_field_background_color_focus="red",
    input_field_text_color_normal="white",
)
```

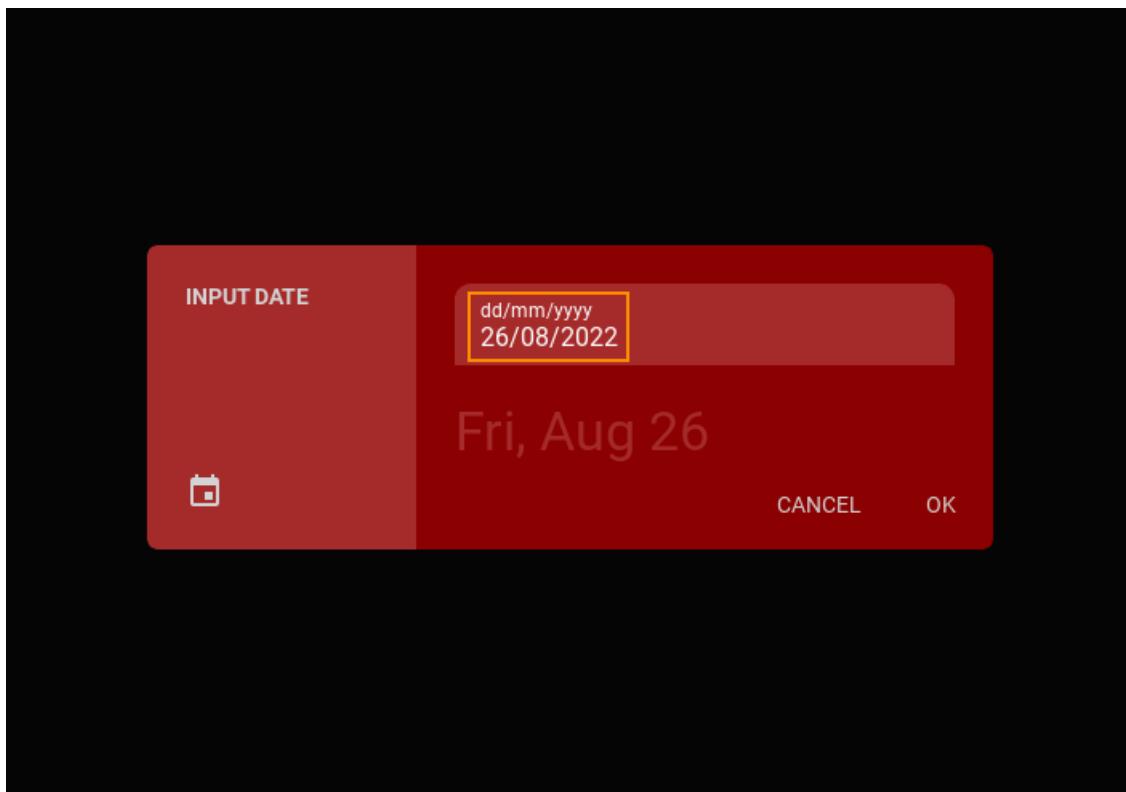


*input\_field\_text\_color\_normal* is an `ColorProperty` and defaults to `None`.

#### **input\_field\_text\_color\_focus**

Text color focus of input fields in (r, g, b, a) or string format.

New in version 1.1.0.

```
MDDatePicker(  
    primary_color="brown",  
    accent_color="darkred",  
    selector_color="red",  
    text_toolbar_color="lightgrey",  
    text_color="orange",  
    text_current_color="white",  
    text_button_color="lightgrey",  
    input_field_background_color_normal="brown",  
    input_field_background_color_focus="red",  
    input_field_text_color_normal="white",  
)
```

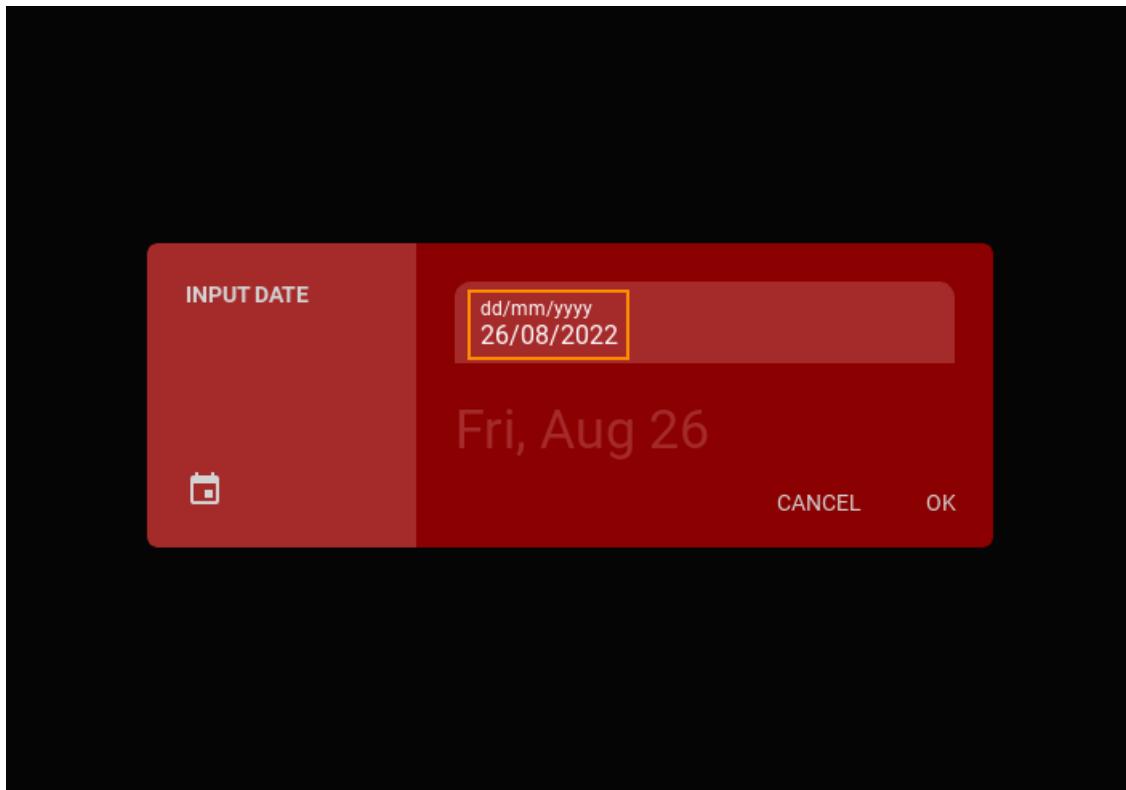


*input\_field\_text\_color\_focus* is an `ColorProperty` and defaults to *None*.

#### **font\_name**

Font name for dialog window text.

```
MDDatePicker(  
    primary_color="brown",  
    accent_color="darkred",  
    selector_color="red",  
    text_toolbar_color="lightgrey",  
    text_color="orange",  
    text_current_color="white",  
    text_button_color="lightgrey",  
    input_field_background_color_normal="brown",  
    input_field_background_color_focus="red",  
    input_field_text_color_normal="white",  
    input_field_text_color_focus="lightgrey",  
    font_name="nasalization.ttf",  
)
```

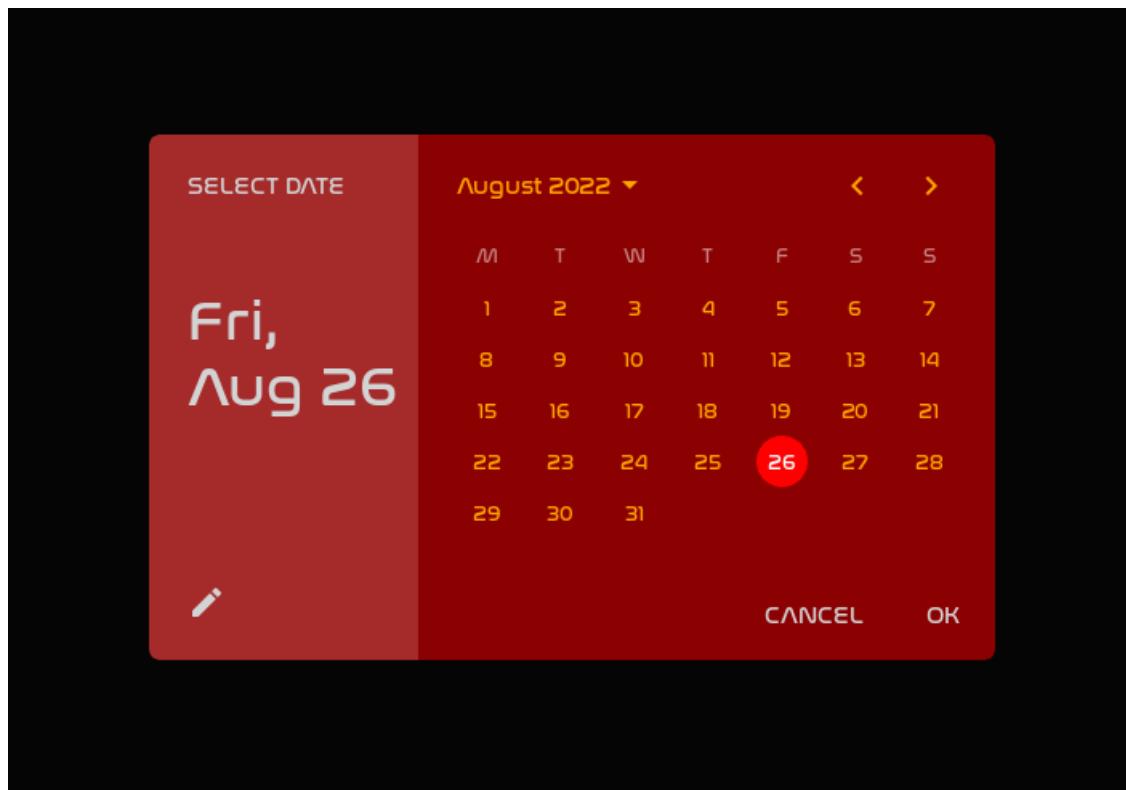

`font_name` is an `StringProperty` and defaults to ‘*Roboto*’.

`on_input_field_background_color(self, instance, value: str | list | tuple)`

For supported of current API.

`on_input_field_text_color(self, instance, value: str | list | tuple)`

For supported of current API.

`on_save(self, *args)`

Events called when the “OK” dialog box button is clicked.

`on_cancel(self, *args)`

Events called when the “CANCEL” dialog box button is clicked.

`class kivymd.uix.pickers.datepicker.DatePickerInputField(*args, **kwargs)`

Implements date input in dd/mm/yyyy format.

`helper_text_mode`

`owner`

`set_error(self)`

Sets a text field to an error state.

`input_filter(self, value: str, boolean: bool)`

Filters the input according to the specified mode.

`is_numeric(self, value: str)`

Returns true if the value of the `value` argument can be converted to an integer, or if the value of the `value` argument is ‘/’.

**get\_list\_date(self)**

Returns a list as `[dd, mm, yyyy]` from a text field for entering a date.

```
class kivymd.uix.pickers.datepicker.datepicker.MDDatePicker(year=None, month=None, day=None, firstweekday=0, **kwargs)
```

Base class for MDDatePicker and MDTimePicker classes.

**Events*****on\_save***


Events called when the “OK” dialog box button is clicked.

***on\_cancel***

Events called when the “CANCEL” dialog box button is clicked.

**text\_weekday\_color**


Text color of weekday names in (r, g, b, a) or string format.

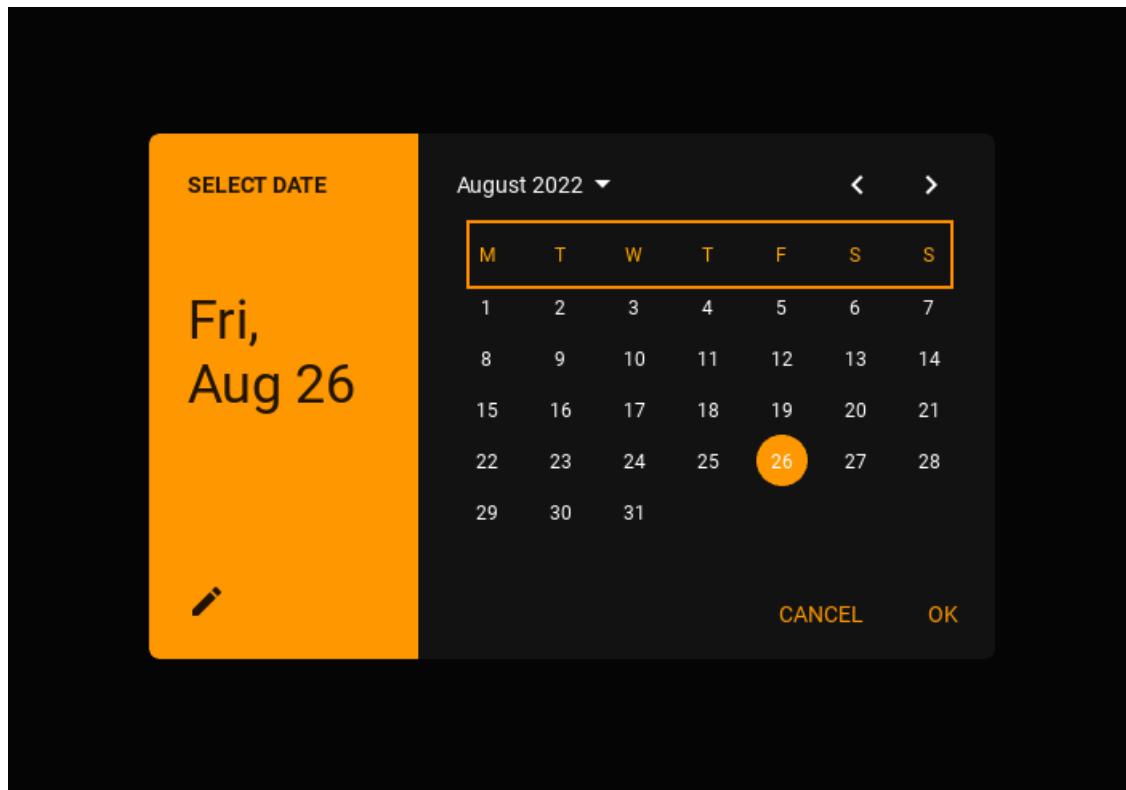

`text_weekday_color` is an `ColorProperty` and defaults to `None`.

**helper\_text**

Helper text when entering an invalid date.

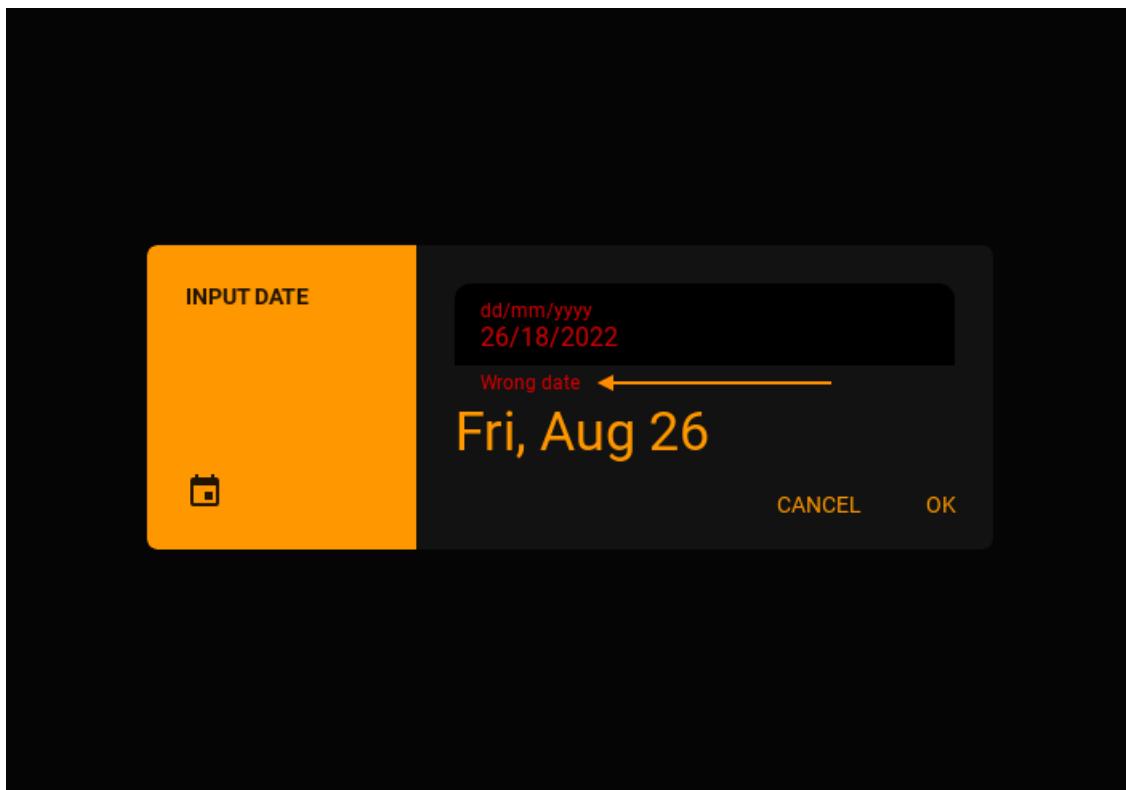

`helper_text` is an [StringProperty](#) and defaults to ‘*Wrong date*’.

#### **day**

The day of the month to be opened by default. If not specified, the current number will be used.

See [Open date dialog with the specified date](#) for more information.

`day` is an [NumericProperty](#) and defaults to *0*.

#### **month**

The number of month to be opened by default. If not specified, the current number will be used.

See [Open date dialog with the specified date](#) for more information.

`month` is an [NumericProperty](#) and defaults to *0*.

#### **year**

The year of month to be opened by default. If not specified, the current number will be used.

See [Open date dialog with the specified date](#) for more information.

`year` is an [NumericProperty](#) and defaults to *0*.

#### **min\_year**

The year of month to be opened by default. If not specified, the current number will be used.

`min_year` is an [NumericProperty](#) and defaults to *1914*.

#### **max\_year**

The year of month to be opened by default. If not specified, the current number will be used.

`max_year` is an [NumericProperty](#) and defaults to *2121*.

**mode**

**Dialog type:** ‘picker’ type allows you to select one date;

‘range’ type allows to set a range of dates from which the user can select a date.

Available options are: ['picker', 'range'].

*mode* is an [ObjectProperty](#) and defaults to *picker*.

**min\_date**

The minimum value of the date range for the ‘mode’ parameter. Must be an object <class ‘datetime.date’>.

See [Open date dialog with the specified date](#) for more information.

*min\_date* is an [ObjectProperty](#) and defaults to *None*.

**max\_date**

The minimum value of the date range for the ‘mode’ parameter. Must be an object <class ‘datetime.date’>.

See [Open date dialog with the specified date](#) for more information.

*max\_date* is an [ObjectProperty](#) and defaults to *None*.

**date\_range\_text\_error**

Error text that will be shown on the screen in the form of a toast if the minimum date range exceeds the maximum.

*date\_range\_text\_error* is an [StringProperty](#) and defaults to ‘Error date range’.

**input\_field\_cls**

A class that will implement date input in the format dd/mm/yyyy. See [DatePickerInputField](#) class for more information.

```
class CustomInputField(MDTextField):
    owner = ObjectProperty() # required attribute

    # Required method.
    def set_error(self):
        [...]

    # Required method.
    def get_list_date(self):
        [...]

    # Required method.
    def input_filter(self):
        [...]

    def show_date_picker(self):
        date_dialog = MDDatePicker(input_field_cls=CustomInputField)
```

*input\_field\_cls* is an [ObjectProperty](#) and defaults to [DatePickerInputField](#).

**sel\_year****sel\_month****sel\_day**

**on\_device\_orientation(self, instance\_theme\_manager: ThemeManager, orientation\_value: str)**

Called when the device's screen orientation changes.

**on\_ok\_button\_pressed(self)**

Called when the 'OK' button is pressed to confirm the date entered.

**is\_date\_valaid(self, date: str)**

Checks the valid of the currently entered date.

**transformation\_from\_dialog\_select\_year(self)**

**transformation\_to\_dialog\_select\_year(self)**

**transformation\_to\_dialog\_input\_date(self)**

**transformation\_from\_dialog\_input\_date(self, interval: Union[int, float])**

**compare\_date\_range(self)**

**update\_calendar\_for\_date\_range(self)**

**update\_text\_full\_date(self, list\_date)**

Updates the title of the week, month and number day name in an open date input dialog.

**update\_calendar(self, year, month)**

**get\_field(self)**

Creates and returns a text field object used to enter dates.

**get\_date\_range(self)**

**set\_text\_full\_date(self, year, month, day, orientation)**

Returns a string of type "Tue, Feb 2" or "Tue, Feb 2" for a date

choose and a string like "Feb 15 - Mar 23" or "Feb 15,

**Mar 23" for**

a date range.

**set\_selected\_widget(self, widget)**

**set\_month\_day(self, day)**

**set\_position\_to\_current\_year(self)**

**generate\_list\_widgets\_years(self)**

**generate\_list\_widgets\_days(self)**

**change\_month(self, operation: str)**

Called when "chevron-left" and "chevron-right" buttons are pressed. Switches the calendar to the previous/next month.

### 2.3.34 ColorPicker

New in version 1.0.0.

**Create, share, and apply color palettes to your UI, as well as measure the accessibility level of any color combination..**



### Usage

```
from typing import Union

from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.pickers import MDColorPicker

KV = """
MDScreen:

    MDTopAppBar:
        id: toolbar
        title: "MDTopAppBar"
        pos_hint: {"top": 1}
```

(continues on next page)

(continued from previous page)

```

MDRaisedButton:
    text: "OPEN PICKER"
    pos_hint: {"center_x": .5, "center_y": .5}
    md_bg_color: toolbar.md_bg_color
    on_release: app.open_color_picker()
...

class MyApp(MDApp):
    def build(self):
        return Builder.load_string(KV)

    def open_color_picker(self):
        color_picker = MDColorPicker(size_hint=(0.45, 0.85))
        color_picker.open()
        color_picker.bind(
            on_select_color=self.on_select_color,
            on_release=self.get_selected_color,
        )

    def update_color(self, color: list) -> None:
        self.root.ids.toolbar.md_bg_color = color


    def get_selected_color(
        self,
        instance_color_picker: MDColorPicker,
        type_color: str,
        selected_color: Union[list, str],
    ):
        """
        Return selected color.

        print(f"Selected color is {selected_color}")
        self.update_color(selected_color[:-1] + [1])
        """

    def on_select_color(self, instance_gradient_tab, color: list) -> None:
        """
        Called when a gradient image is clicked.
        """

```

MyApp().run()

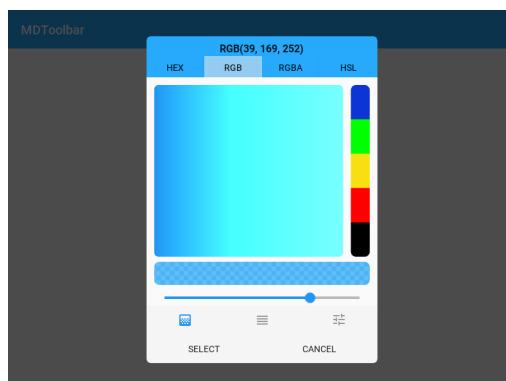

**API - kivymd.uix.pickers.colorpicker.colorpicker**

```
class kivymd.uix.pickers.colorpicker.colorpicker.MDColorPicker(**kwargs)
```

ModalView class. See module documentation for more information.

**Events*****on\_pre\_open:***

Fired before the ModalView is opened. When this event is fired ModalView is not yet added to window.

***on\_open:***

Fired when the ModalView is opened.

***on\_pre\_dismiss:***

Fired before the ModalView is closed.

***on\_dismiss:***

Fired when the ModalView is closed. If the callback returns True, the dismiss will be canceled.

Changed in version 1.11.0: Added events *on\_pre\_open* and *on\_pre\_dismiss*.

Changed in version 2.0.0: Added property ‘overlay\_color’.

Changed in version 2.1.0: Marked *attach\_to* property as deprecated.

**adjacent\_color\_constants**

A list of values that are used to create the gradient. These values are selected empirically. Each of these values will be added to the selected RGB value, thus creating colors that are close in value.

*adjacent\_color\_constants* is an [ListProperty](#) and defaults to [0.299, 0.887, 0.411].

**default\_color**

Default color value in (r, g, b, a) or string format. The set color value will be used when you open the dialog.

*default\_color* is an [ColorProperty](#) and defaults to *None*.

**type\_color**

Type of color. Available options are: ‘RGBA’, ‘HEX’, ‘RGB’.

*type\_color* is an [OptionProperty](#) and defaults to ‘RGB’.

**background\_down\_button\_selected\_type\_color**


Button background for choosing a color type (‘RGBA’, ‘HEX’, ‘HSL’, ‘RGB’) in (r, g, b, a) or string format.



*background\_down\_button\_selected\_type\_color* is an [ColorProperty](#) and defaults to [1, 1, 1, 0.3].

**radius\_color\_scale**

The radius value for the color scale.



`radius` is an `VariableListProperty` and defaults to `[8, 8, 8, 8]`.

**`text_button_ok`**

Color selection button text.

`text_button_ok` is an `StringProperty` and defaults to ‘`SELECT`’.

**`text_button_cancel`**

Cancel button text.

`text_button_cancel` is an `StringProperty` and defaults to ‘`CANCEL`’.

**`selected_color`**

**`update_color_slider_item_bottom_navigation(self, color: list)`**

Updates the color of the slider that sets the transparency value of the selected color and the color of bottom navigation items.

**`update_color_type_buttons(self, color: list)`**

Updating button colors (display buttons of type of color) to match the selected color.

**`get_rgb(self, color: list)`**

Returns an RGB list of values from 0 to 255.

**`on_background_down_button_selected_type_color(self, instance_color_picker, color: list)`**

**`on_type_color(self, instance_color_picker, type_color: str = "", interval: Union[float, int] = 0)`**

Called when buttons are clicked to set the color type.

**`on_open(self)`**

Default open event handler.

**`on_select_color(self, color: list)`**

Called when a gradient image is clicked.

**`on_switch_tabs(self, bottom_navigation_instance, bottom_navigation_item_instance, name_tab)`**

Called when switching tabs of bottom navigation.

**`on_release(self, *args)`**


Called when the `SELECT` button is pressed

### 2.3.35 TimePicker

See also:

Material Design spec, Time picker

Includes time picker.

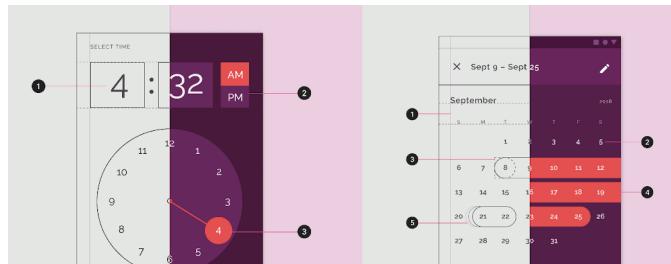

**Warning:** The widget is under testing. Therefore, we would be grateful if you would let us know about the bugs found.

### Usage

Declarative KV style

```
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.pickers import MDTIMEPicker

KV = """
MDFloatLayout:

    MDRaisedButton:
        text: "Open time picker"
        pos_hint: {'center_x': .5, 'center_y': .5}
        on_release: app.show_time_picker()
    ...

class Test(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return Builder.load_string(KV)

    def show_time_picker(self):
        '''Open time picker dialog.'''
        time_dialog = MDTIMEPicker()
```

(continues on next page)

(continued from previous page)

```
    time_dialog.open()
```

```
Test().run()
```


Declarative python style

```
from kivymd.app import MDApp
from kivymd.uix.button import MDRaisedButton
from kivymd.uix.pickers import MDTimePicker
from kivymd.uix.screen import MDScreen

class Test(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return (
            MDScreen(
                MDRaisedButton(
                    text="Open time picker",
                    pos_hint={'center_x': .5, 'center_y': .5},
                    on_release=self.show_time_picker,
                )
            )
        )

    def show_time_picker(self, *args):
        '''Open time picker dialog.'''
        MDTimePicker().open()

Test().run()
```

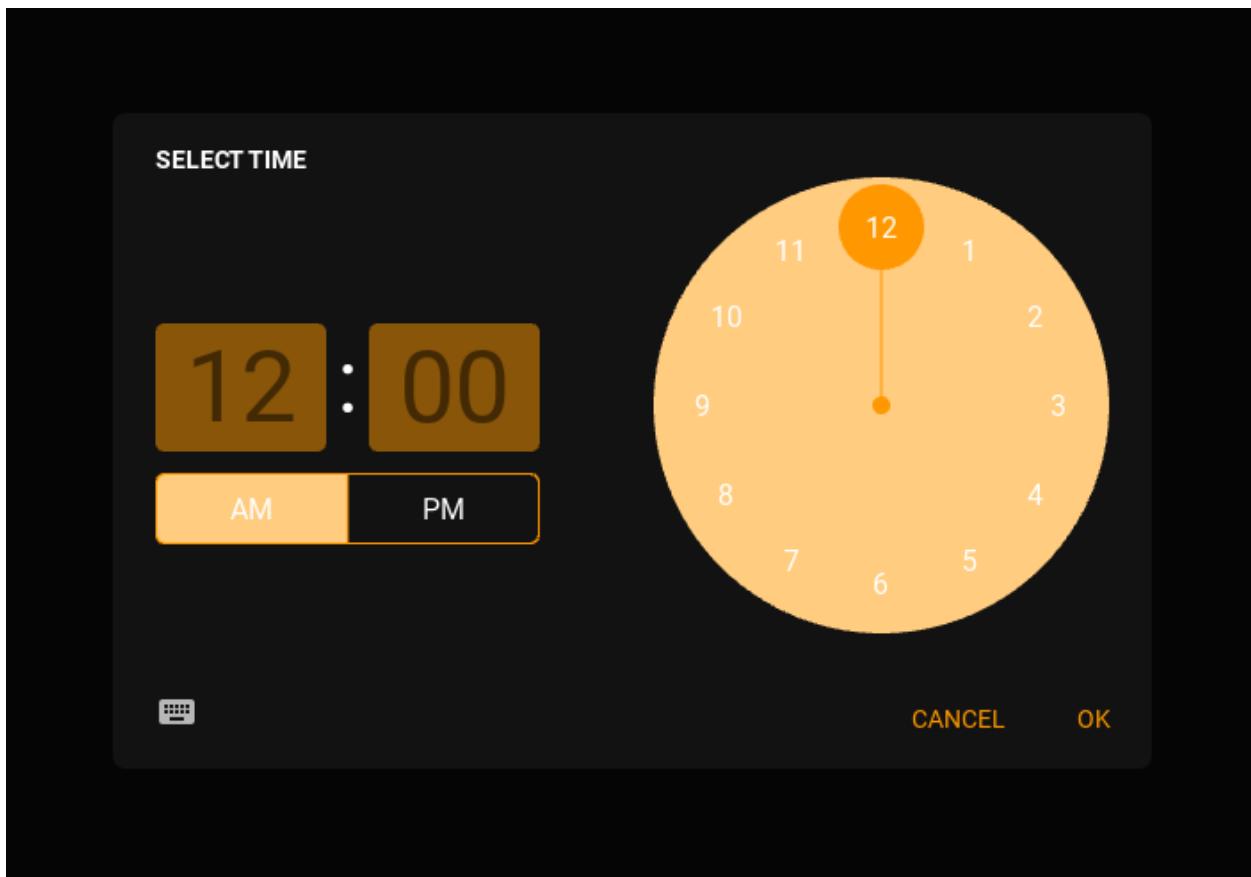

### Binding method returning set time

```
def show_time_picker(self):
    time_dialog = MDTimePicker()
    time_dialog.bind(time=self.get_time)
    time_dialog.open()

def get_time(self, instance, time):
    ...
    The method returns the set time.

:type instance: <kivymd.uix.picker.MDTimePicker object>
:type time: <class 'datetime.time'>
...

return time
```

## Open time dialog with the specified time

Use the `set_time` method of the class.

```
def show_time_picker(self):
    from datetime import datetime


    # Must be a datetime object
    previous_time = datetime.strptime("03:20:00", '%H:%M:%S').time()
    time_dialog = MDTimePicker()
    time_dialog.set_time(previous_time)
    time_dialog.open()
```

---

**Note:** For customization of the `MDTimePicker` class, see the documentation in the `BaseDialogPicker` class.

---

```
MDTimePicker(
    primary_color="brown",
    accent_color="red",
    text_button_color="white",
).open()
```

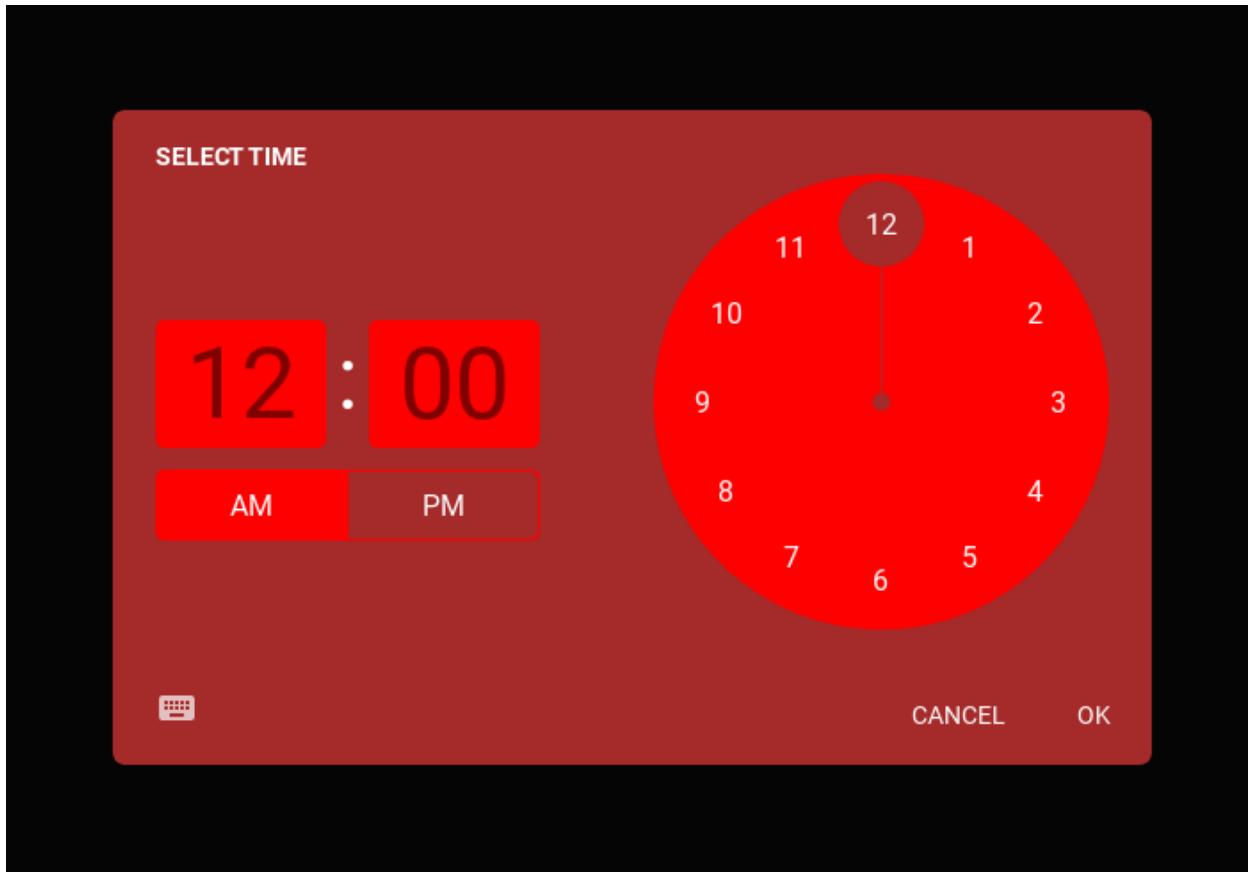

**API - kivymd.uix.pickers.timepicker.timepicker**

```
class kivymd.uix.pickers.timepicker.MDTimePicker(**kwargs)
```

Base class for MDDatePicker and MDTimePicker classes.

**Events*****on\_save***

Events called when the “OK” dialog box button is clicked.

***on\_cancel***

Events called when the “CANCEL” dialog box button is clicked.

**hour**

Current hour.

*hour* is an `StringProperty` and defaults to ‘12’.


**minute**

Current minute.

*minute* is an `StringProperty` and defaults to *0*.

**minute\_radius**


Radius of the minute input field.

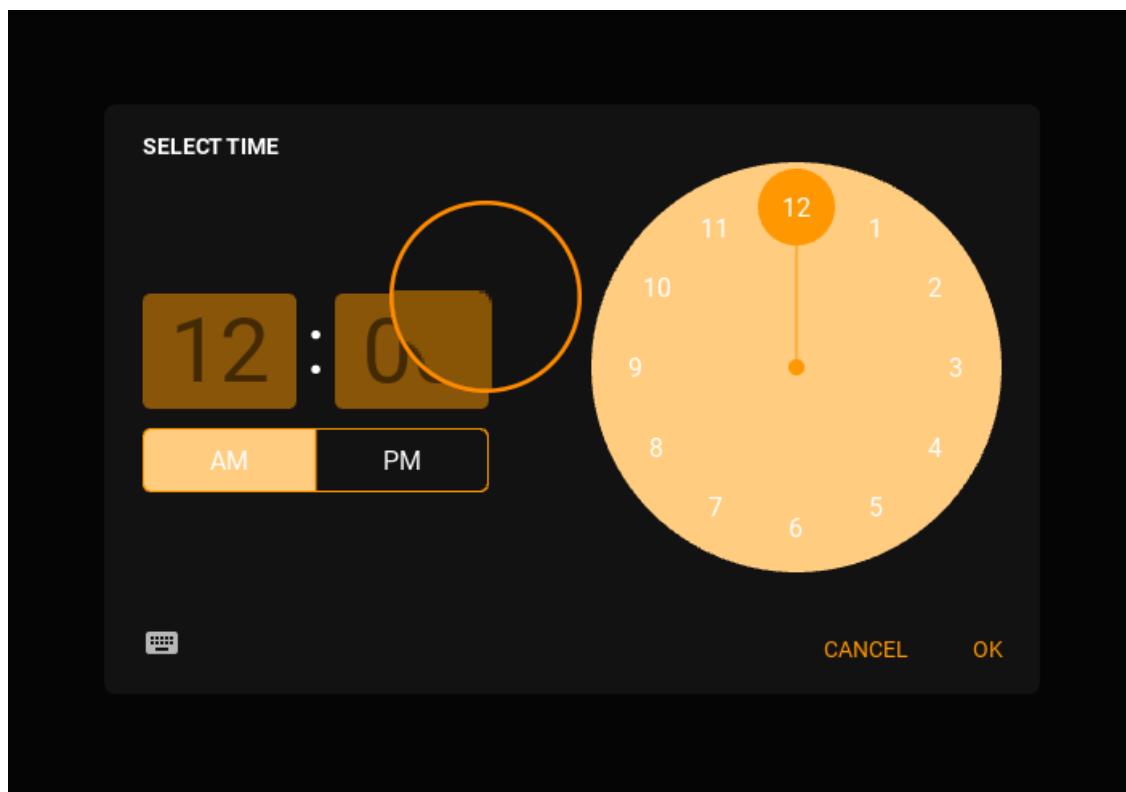

*minute\_radius* is an `ListProperty` and defaults to [*dp(5)*, *dp(5)*, *dp(5)*, *dp(5)*].

**hour\_radius**


Radius of the hour input field.

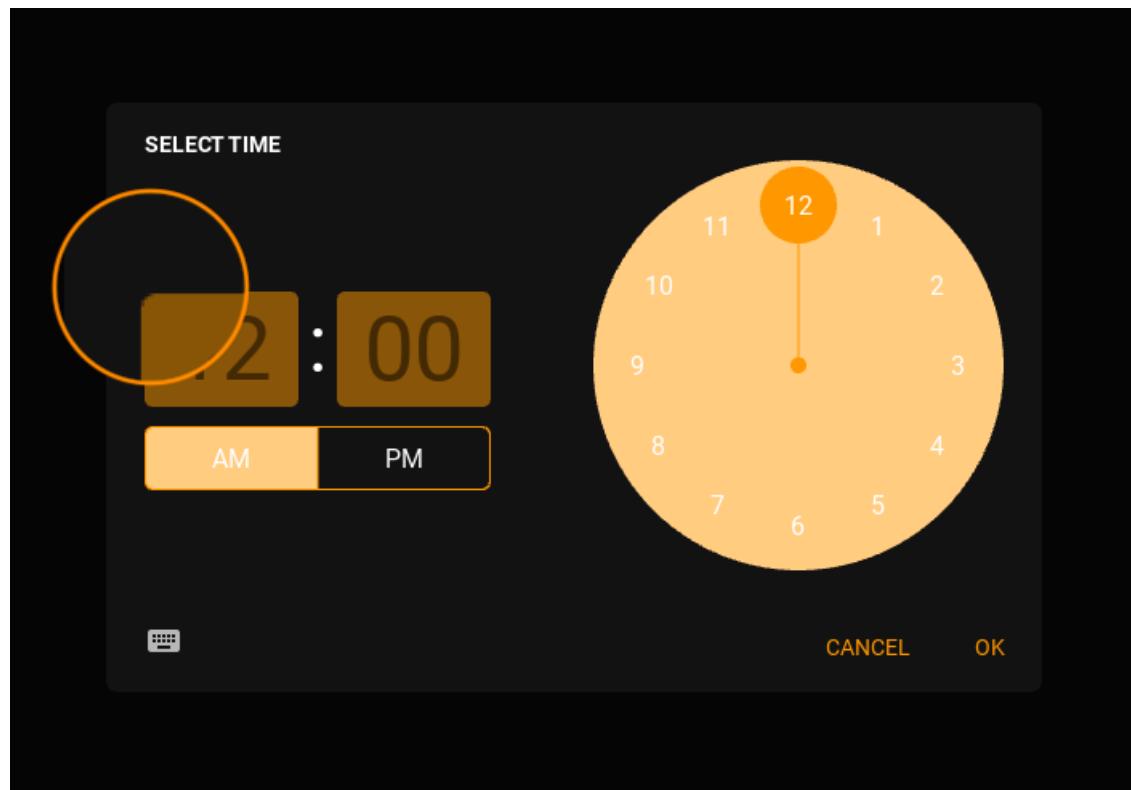

`hour_radius` is an `ListProperty` and defaults to [`dp(5)`, `dp(5)`, `dp(5)`, `dp(5)`].

#### `am_pm_radius`


Radius of the AM/PM selector.

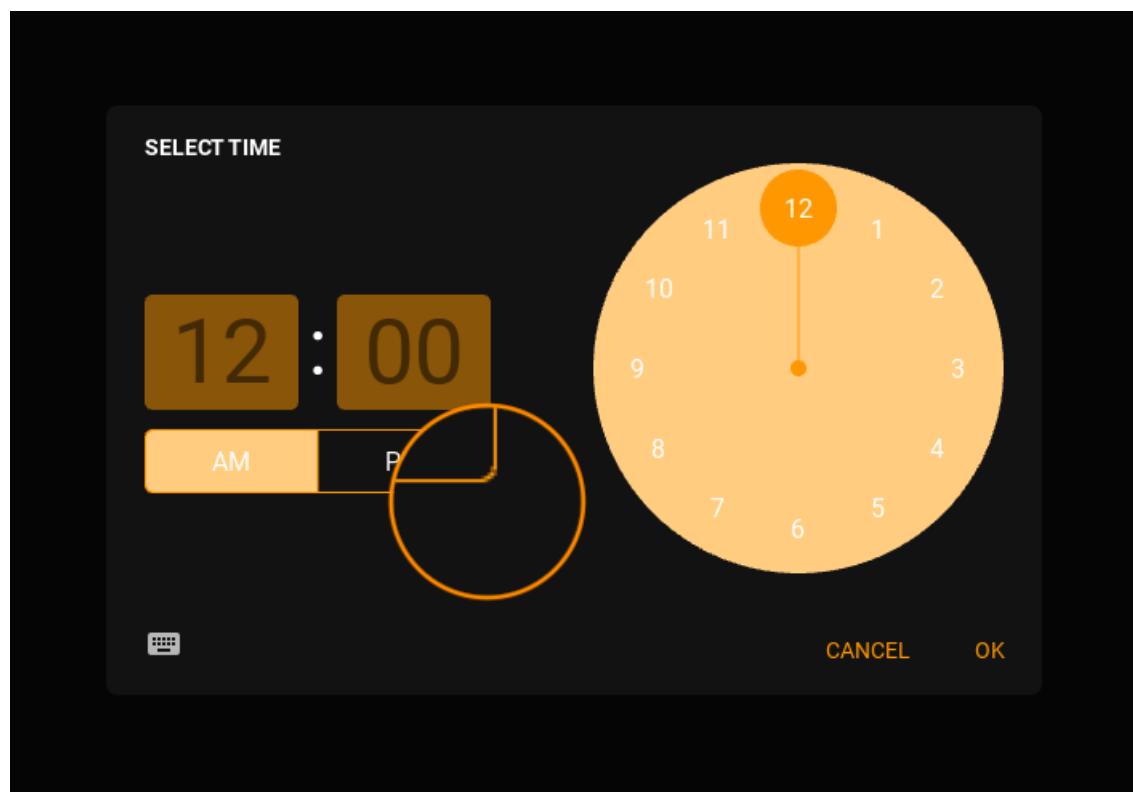

`am_pm_radius` is an `NumericProperty` and defaults to `dp(5)`.

#### `am_pm_border_width`

Width of the AM/PM selector's borders.

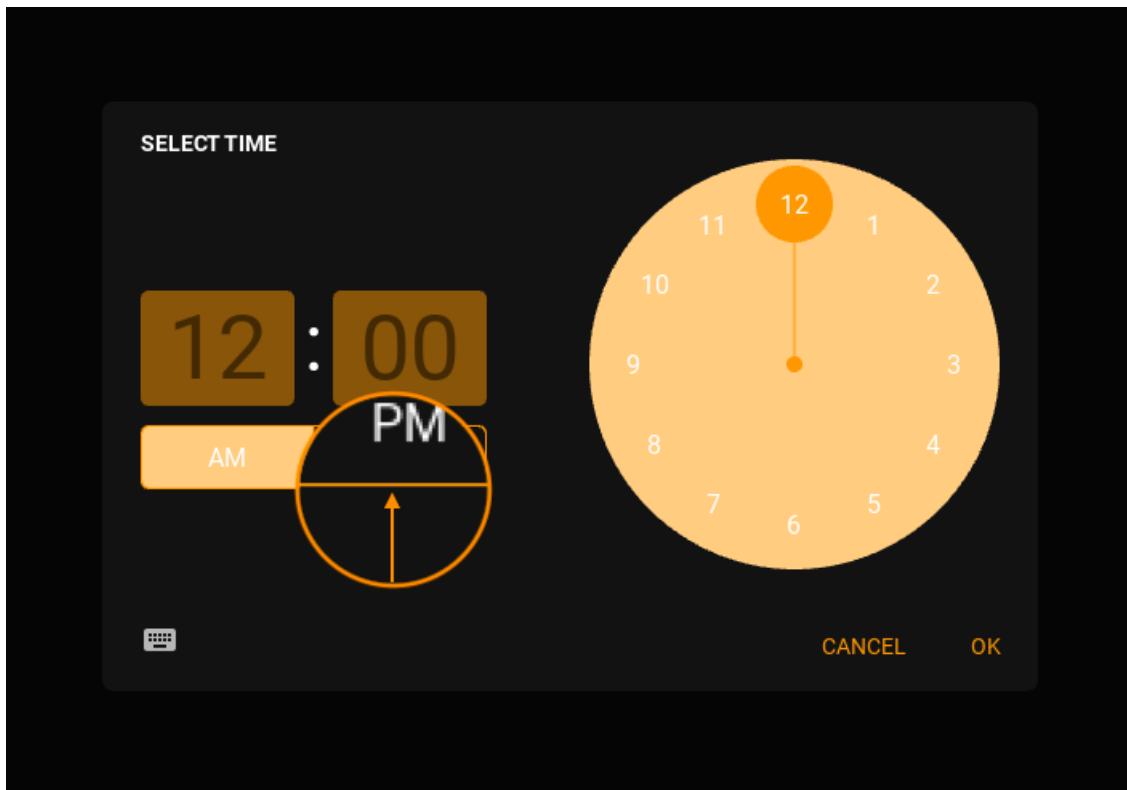

`am_pm_border_width` is an `NumericProperty` and defaults to `dp(1)`.

#### `am_pm`

Current AM/PM mode.

`am_pm` is an `OptionProperty` and defaults to 'am'.

#### `animation_duration`

Duration of the animations.

`animation_duration` is an `NumericProperty` and defaults to 0.2.

#### `animation_transition`

Transition type of the animations.

`animation_transition` is an `StringProperty` and defaults to 'out\_quad'.

#### `time`

Returns the current time object.

`time` is an `ObjectProperty` and defaults to `None`.

#### `set_time(self, time_obj)`

Manually set time dialog with the specified time.

#### `get_state(self)`


Returns the current state of TimePicker. Can be one of *portrait*, *landscape* or *input*.

### 2.3.36 ExpansionPanel

See also:

Material Design spec, Expansion panel

Expansion panels contain creation flows and allow lightweight editing of an element.

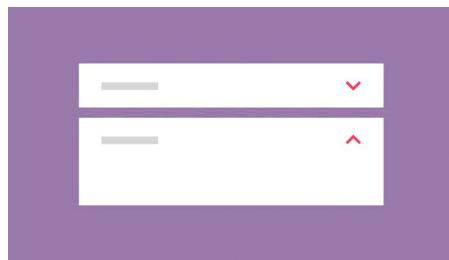

#### Usage

```
self.add_widget(  
    MDExpansionPanel(  
        icon="logo.png", # panel icon  
        content=Content(), # panel content  
        panel_cls=MDExpansionPanelOneLine(text="Secondary text"), # panel class  
    )  
)
```

To use `MDExpansionPanel` you must pass one of the following classes to the `panel_cls` parameter:

- `MDExpansionPanelOneLine`
- `MDExpansionPanelTwoLine`
- `MDExpansionPanelThreeLine`

These classes are inherited from the following classes:

- `OneLineAvatarIconListItem`
- `TwoLineAvatarIconListItem`
- `ThreeLineAvatarIconListItem`

```
self.root.ids.box.add_widget(  
    MDExpansionPanel(  
        icon="logo.png",  
        content=Content(),  
        panel_cls=MDExpansionPanelThreeLine(  
            text="Text",  
            secondary_text="Secondary text",  
            tertiary_text="Tertiary text",  
        )  
    )  
)
```

## Example

```

import os

from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.boxlayout import MDBBoxLayout
from kivymd.uix.expansionpanel import MDExpansionPanel, MDExpansionPanelThreeLine
from kivymd import images_path

KV = '''
<Content>
    adaptive_height: True

    TwoLineIconListItem:
        text: "(050)-123-45-67"
        secondary_text: "Mobile"

        IconLeftWidget:
            icon: 'phone'

    MDScrollView:

        MDGridLayout:
            id: box
            cols: 1
            adaptive_height: True
    ...
'''


class Content(MDBBoxLayout):
    '''Custom content.'''


class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

    def on_start(self):
        for i in range(10):
            self.root.ids.box.add_widget(
                MDExpansionPanel(
                    icon=os.path.join(images_path, "logo", "kivymd-icon-128.png"),
                    content=Content(),
                    panel_cls=MDExpansionPanelThreeLine(
                        text="Text",
                        secondary_text="Secondary text",
                        tertiary_text="Tertiary text",
                    )
                )
            )

```

(continues on next page)

(continued from previous page)

```
)
```

```
Test().run()
```

## Two events are available for MDExpansionPanel

- *on\_open*
- *on\_close*

**MDExpansionPanel:**

```
    on_open: app.on_panel_open(args)
    on_close: app.on_panel_close(args)
```

The user function takes one argument - the object of the panel:

```
def on_panel_open(self, instance_panel):
    print(instance_panel)
```

### See also:

See Expansion panel example

Expansion panel and MDCard

## API - kivymd.uix.expansionpanel.expansionpanel

```
class kivymd.uix.expansionpanel.expansionpanel.MDExpansionPanelOneLine(*args, **kwargs)
```

Single line panel.

```
class kivymd.uix.expansionpanel.expansionpanel.MDExpansionPanelTwoLine(*args, **kwargs)
```

Two-line panel.

```
class kivymd.uix.expansionpanel.expansionpanel.MDExpansionPanelThreeLine(*args, **kwargs)
```

Three-line panel.

```
class kivymd.uix.expansionpanel.expansionpanel.MDExpansionPanelLabel(**kwargs)
```

Label panel.

**..warning:: This class is created for use in the**

MDStepperVertical and MDStepper classes, and has not been tested for use outside of these classes.

```
set_paddings(self, interval: Union[int, float])
```

```
class kivymd.uix.expansionpanel.expansionpanel.MDExpansionPanel(**kwargs)
```

### Events

**on\_open**

Called when a panel is opened.

**on\_close**

Called when a panel is closed.

**content**

Content of panel. Must be *Kivy* widget.

*content* is an `ObjectProperty` and defaults to `None`.

**icon**

Icon of panel.

Icon Should be either be a path to an image or a logo name in `md_icons`

*icon* is an `StringProperty` and defaults to ''.

**opening\_transition**

The name of the animation transition type to use when animating to the state ‘open’.

*opening\_transition* is a `StringProperty` and defaults to ‘out\_cubic’.

**opening\_time**

The time taken for the panel to slide to the state ‘open’.

*opening\_time* is a `NumericProperty` and defaults to 0.2.

**closing\_transition**

The name of the animation transition type to use when animating to the state ‘close’.

*closing\_transition* is a `StringProperty` and defaults to ‘out\_sine’.

**closing\_time**

The time taken for the panel to slide to the state ‘close’.

*closing\_time* is a `NumericProperty` and defaults to 0.2.

**panel\_cls**

Panel object. The object must be one of the classes `MDExpansionPanelOneLine`, `MDExpansionPanelTwoLine` or `MDExpansionPanelThreeLine`.

*panel\_cls* is a `ObjectProperty` and defaults to `None`.

**on\_open(self, \*args)**

Called when a panel is opened.

**on\_close(self, \*args)**

Called when a panel is closed.

**check\_open\_panel(self, instance\_panel: [MDExpansionPanelThreeLine, MDExpansionPanelTwoLine, MDExpansionPanelThreeLine, MDExpansionPanelLabel])**

Called when you click on the panel. Called methods to open or close a panel.

**set\_chevron\_down(self)**

Sets the chevron down.

**set\_chevron\_up(self, instance\_chevron: MDExpansionChevronRight)**

Sets the chevron up.

**close\_panel(self, instance\_expansion\_panel, press\_current\_panel: bool)**

Method closes the panel.

**open\_panel(self, \*args)**

Method opens a panel.

**get\_state(self)**

Returns the state of panel. Can be *close* or *open*.

**add\_widget(self, widget, index=0, canvas=None)**

Add a new widget as a child of this widget.

**Parameters****widget: Widget**

Widget to add to our list of children.

**index: int, defaults to 0**

Index to insert the widget in the list. Notice that the default of 0 means the widget is inserted at the beginning of the list and will thus be drawn on top of other sibling widgets. For a full discussion of the index and widget hierarchy, please see the Widgets Programming Guide.

New in version 1.0.5.

**canvas: str, defaults to None**


Canvas to add widget's canvas to. Can be 'before', 'after' or None for the default canvas.

New in version 1.9.0.

```
>>> from kivy.uix.button import Button
>>> from kivy.uix.slider import Slider
>>> root = Widget()
>>> root.add_widget(Button())
>>> slider = Slider()
>>> root.add_widget(slider)
```

### 2.3.37 Label

The **MDLabel** widget is for rendering text.

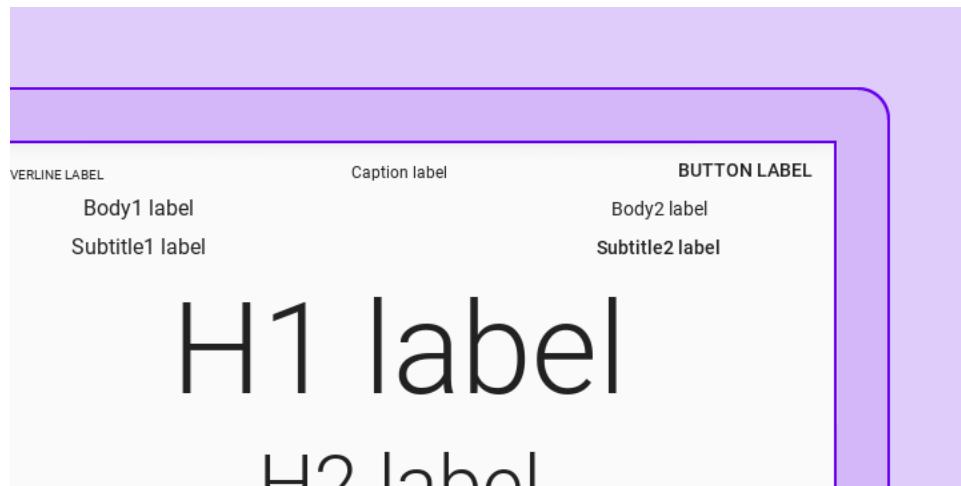

- *MDLabel*

- *MDIcon*

## MDLabel

Class `MDLabel` inherited from the `Label` class but for `MDLabel` the `text_size` parameter is `(self.width, None)` and default is positioned on the left:

```
from kivy.lang import Builder

from kivymd.app import MDApp

KV = '''
MDScreen:


    MDBBoxLayout:
        orientation: "vertical"

        MDTopAppBar:
            title: "MDLabel"

        MDLabel:
            text: "MDLabel"
    '''

class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

Test().run()
```



**Note:** See `halign` and `valign` attributes of the `Label` class

```
MDLabel:
    text: "MDLabel"
    halign: "center"
```



**MDLabel color:**

`MDLabel` provides standard color themes for label color management:

```
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.label import MDLabel


KV = '''
MDScreen:

    MDBBoxLayout:
        id: box
        orientation: "vertical"

        MDTopAppBar:
            title: "MDLabel"
    ...

class Test(MDApp):
    def build(self):
        screen = Builder.load_string(KV)
        # Names of standard color themes.
        for name_theme in [
            "Primary",
            "Secondary",
            "Hint",
            "Error",
            "ContrastParentBackground",
        ]:
            screen.ids.box.add_widget(
                MDLabel(
                    text=name_theme,
                    halign="center",
                    theme_text_color=name_theme,
                )
            )
        return screen

Test().run()
```

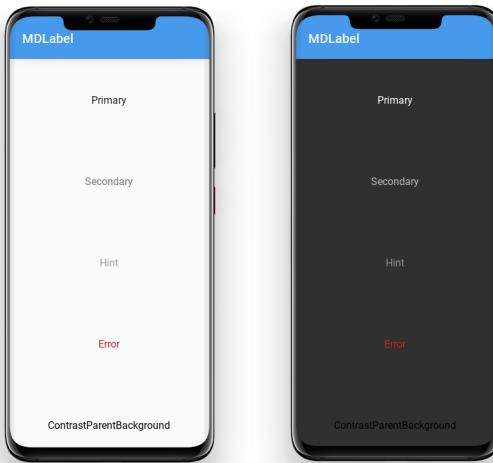

To use a custom color for `MDLabel`, use a theme ‘*Custom*’. After that, you can specify the desired color in the `rgba` format in the `text_color` parameter:

```
MDLabel:
    text: "Custom color"
    halign: "center"
    theme_text_color: "Custom"
    text_color: 0, 0, 1, 1
```

Custom color

`MDLabel` provides standard font styles for labels. To do this, specify the name of the desired style in the `font_style` parameter:

```
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.label import MDLabel
from kivymd.font_definitions import theme_font_styles


KV = '''
MDScreen:

    MDBBoxLayout:
        orientation: "vertical"

        MDTopAppBar:
            title: "MDLabel"

        ScrollView:

            MDList:
                id: box
'''
```

(continues on next page)

(continued from previous page)

```

class Test(MDApp):
    def build(self):
        screen = Builder.load_string(KV)
        # Names of standard font styles.
        for name_style in theme_font_styles[:-1]:
            screen.ids.box.add_widget(
                MDLabel(
                    text=f"{name_style} style",
                    halign="center",
                    font_style=name_style,
                )
            )
    return screen

Test().run()

```

## MDIcon

You can use labels to display material design icons using the [MDIcon](#) class.

**See also:**

[Material Design Icons](#)

[Material Design Icon Names](#)

The [MDIcon](#) class is inherited from [MDLabel](#) and has the same parameters.

**Warning:** For the [MDIcon](#) class, you cannot use `text` and `font_style` options!

```


MDIcon:
    icon: "gmail"
    pos_hint: {"center_x": .5, "center_y": .5}

```



## MDIcon with badge icon

```
MDIcon:
    icon: "gmail"
    badge_icon: "numeric-10"
    pos_hint: {"center_x": .5, "center_y": .5}
```



## API - kivymd.uix.label.label

`class kivymd.uix.label.label.MDLabel(**kwargs)`

Implements the creation and addition of child widgets as declarative programming style.

### `font_style`

Label font style.

Available vanilla font\_style are: ‘H1’, ‘H2’, ‘H3’, ‘H4’, ‘H5’, ‘H6’, ‘Subtitle1’, ‘Subtitle2’, ‘Body1’, ‘Body2’, ‘Button’, ‘Caption’, ‘Overline’, ‘Icon’.

`font_style` is an `StringProperty` and defaults to ‘Body1’.

### `text`

Text of the label.

### `theme_text_color`

Label color scheme name.

Available options are: ‘Primary’, ‘Secondary’, ‘Hint’, ‘Error’, ‘Custom’, ‘ContrastParentBackground’.

`theme_text_color` is an `OptionProperty` and defaults to `None`.

### `text_color`

Label text color in (r, g, b, a) format.

`text_color` is an `ColorProperty` and defaults to `None`.

### `parent_background`

### `can_capitalize`

### `canvas_bg`

`check_font_styles(self, interval: Union[int, float] = 0)`

`update_font_style(self, instance_label, font_style: str)`

`on_theme_text_color(self, instance_label, theme_text_color: str)`

```
on_text_color(self, instance_label, color: Union[list, str])
on_opposite_colors(self, *args)
on_md_bg_color(self, instance_label, color: Union[list, str])
on_size(self, instance_label, size: list)
update_canvas_bg_pos(self, instance_label, pos: list)

class kivymd.uix.label.label.MDIcon(*args, **kwargs)
    Float layout class. For more information, see in the FloatLayout class documentation.

icon
    Label icon name.
    icon is an StringProperty and defaults to ‘android’.

badge_icon
    Label badge icon name.
    New in version 1.0.0.
    badge_icon is an StringProperty and defaults to ‘’.

badge_icon_color
    Badge icon color in (r, g, b, a) format.
    New in version 1.0.0.
    badge_icon_color is an ColorProperty and defaults to None.

badge_bg_color
    Badge icon background color in (r, g, b, a) format.
    New in version 1.0.0.
    badge_bg_color is an ColorProperty and defaults to None.

badge_font_size
    Badge font size.
    New in version 1.0.0.
    badge_font_size is an NumericProperty and defaults to 0.

source
    Path to icon.
    source is an StringProperty and defaults to None.
```

`adjust_size(self, *args)`

### 2.3.38 Menu

#### **See also:**

## Material Design spec, Menus

**Menus display a list of choices on temporary surfaces.**

es lay spread out on the table - Samsa was a travelling salesman - and above a picture that he had recently cut out of an illustrated magazine and housed in a frame. It showed a lady fitted out with a fur hat and fur boa who was wearing a heavy fur muff that covered the whole of her lower arm towards

urned to look out the window at the dull weather. Drops of rain could  
the pane, which made him feel quite sad. "How about if I sleep a little  
rget all this nonsense", he thought, but that was something he was u  
e was used to sleeping on his right, and in his present state couldn't  
However hard he threw himself onto his right, he always rolled back  
. He must have tried it a hundred times, shut his eyes so that he wou  
at the floundering legs, and only stopped when he began to feel a mild  
it he had never felt before.



## Usage

```
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.menu import MDDropdownMenu

KV = '''
MDScreen:

    MDRaisedButton:
        id: button
        text: "PRESS ME"
        pos_hint: {"center_x": .5, "center_y": .5}
        on_release: app.menu.open()
    ...

class Test(MDApp):
    def __init__(self, **kwargs):
        super().__init__(**kwargs)
```

(continues on next page)

(continued from previous page)

```

self.screen = Builder.load_string(KV)
menu_items = [
{
    "text": f"Item {i}",
    "viewclass": "OneLineListItem",
    "on_release": lambda x=f"Item {i}": self.menu_callback(x),
} for i in range(5)
]
self.menu = MDDropdownMenu(
    caller=self.screen.ids.button,
    items=menu_items,
    width_mult=4,
)

def menu_callback(self, text_item):
    print(text_item)

def build(self):
    return self.screen

```

Test().run()

**Warning:** Do not create the `MDDropdownMenu` object when you open the menu window. Because on a mobile device this one will be very slow!

## Wrong

```

menu = MDDropdownMenu(caller=self.screen.ids.button, items=menu_items)
menu.open()

```

## Customization of menu item

Menu items are created in the same way as items for the `RecycleView` class.

```

from kivy.lang import Builder
from kivy.metrics import dp
from kivy.properties import StringProperty

from kivymd.app import MDApp
from kivymd.uix.boxlayout import MDBBoxLayout
from kivymd.uix.list import IRightBodyTouch, OneLineAvatarIconListItem
from kivymd.uix.menu import MDDropdownMenu

KV = '''
<RightContentCls>

```

(continues on next page)

(continued from previous page)

```

disabled: True
adaptive_size: True
pos_hint: {"center_y": .5}

MDIconButton:
    icon: root.icon
    user_font_size: "16sp"
    md_bg_color_disabled: 0, 0, 0, 0

MDLabel:
    text: root.text
    font_style: "Caption"
    adaptive_size: True
    pos_hint: {"center_y": .5}

<Item>

IconLeftWidget:
    icon: root.left_icon

RightContentCls:
    id: container
    icon: root.right_icon
    text: root.right_text

MDScreen:

MDRaisedButton:
    id: button
    text: "PRESS ME"
    pos_hint: {"center_x": .5, "center_y": .5}
    on_release: app.menu.open()
    ...

class RightContentCls(IRightBodyTouch, MDBBoxLayout):
    icon = StringProperty()
    text = StringProperty()

class Item(OneLineAvatarIconListItem):
    left_icon = StringProperty()
    right_icon = StringProperty()
    right_text = StringProperty()

class Test(MDApp):
    def __init__(self, **kwargs):
        super().__init__(**kwargs)
        self.screen = Builder.load_string(KV)

```

(continues on next page)

(continued from previous page)

```

menu_items = [
    {
        "text": f"Item {i}",
        "right_text": f"R+{i}",
        "right_icon": "apple-keyboard-command",
        "left_icon": "git",
        "viewclass": "Item",
        "height": dp(54),
        "on_release": lambda x=f"Item {i}": self.menu_callback(x),
    } for i in range(5)
]
self.menu = MDDropdownMenu(
    caller=self.screen.ids.button,
    items=menu_items,
    width_mult=4,
)

def menu_callback(self, text_item):
    print(text_item)

def build(self):
    return self.screen

```

Test().run()

## Header

```

from kivy.lang import Builder
from kivy.metrics import dp

from kivymd.app import MDApp
from kivymd.uix.menu import MDDropdownMenu
from kivymd.uix.boxlayout import MDBBoxLayout

KV = '''
<MenuHeader>
    orientation: "vertical"
    adaptive_size: True
    padding: "4dp"

    MDBBoxLayout:
        spacing: "12dp"
        adaptive_size: True

        MDIconButton:
            icon: "gesture-tap-button"
            pos_hint: {"center_y": .5}

```

(continues on next page)

(continued from previous page)

```

MDLabel:
    text: "Actions"
    adaptive_size: True
    pos_hint: {"center_y": .5}

MDScreen:
    MDRaisedButton:
        id: button
        text: "PRESS ME"
        pos_hint: {"center_x": .5, "center_y": .5}
        on_release: app.menu.open()
    ...

class MenuHeader(MDBoxLayout):
    '''An instance of the class that will be added to the menu header.'''


class Test(MDApp):
    def __init__(self, **kwargs):
        super().__init__(**kwargs)
        self.screen = Builder.load_string(KV)
        menu_items = [
            {
                "text": f"Item {i}",
                "viewclass": "OneLineListItem",
                "height": dp(56),
                "on_release": lambda x=f"Item {i}": self.menu_callback(x),
            } for i in range(5)
        ]
        self.menu = MDDropdownMenu(
            header_cls=MenuHeader(),
            caller=self.screen.ids.button,
            items=menu_items,
            width_mult=4,
        )

    def menu_callback(self, text_item):
        print(text_item)

    def build(self):
        return self.screen

Test().run()

```

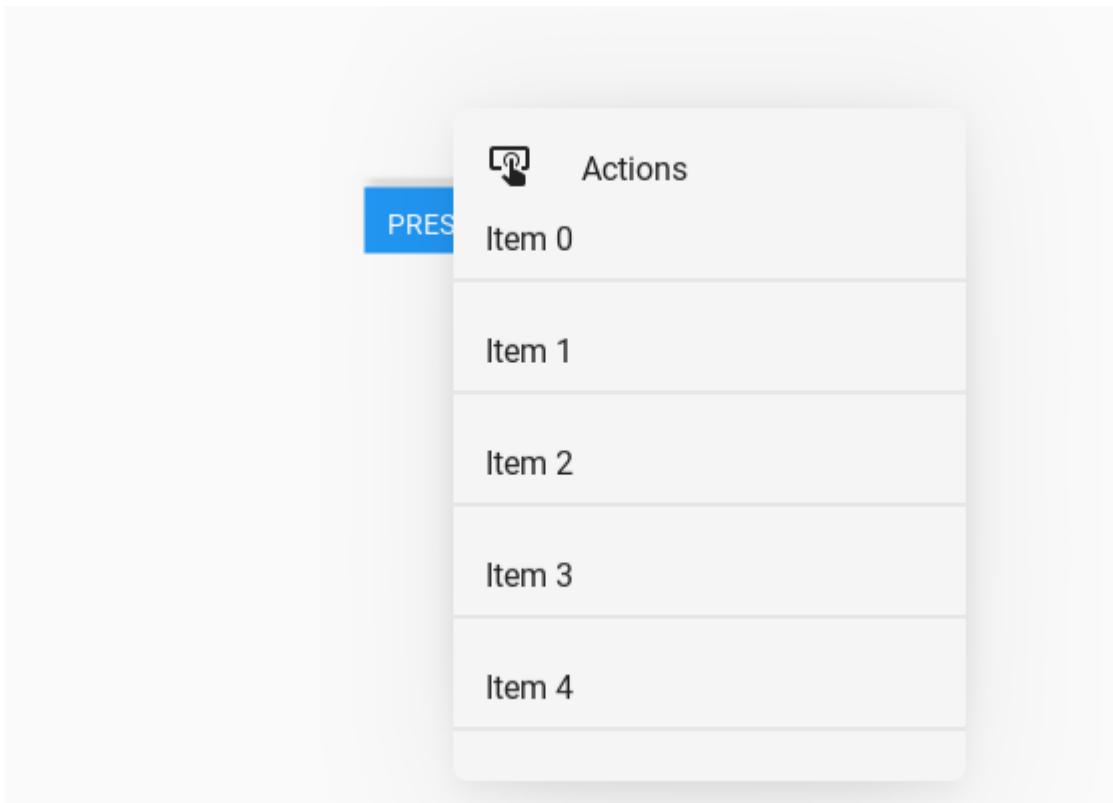

## Menu with MDTopAppBar

The `MDDropdownMenu` works well with the standard `MDTopAppBar`. Since the buttons on the Toolbar are created by the `MDTopAppBar` component, it is necessary to pass the button as an argument to the callback using `lambda x: app.callback(x)`.

**Note:** This example uses drop down menus for both the righthand and lefthand menus (i.e both the ‘triple bar’ and ‘triple dot’ menus) to illustrate that it is possible. A better solution for the ‘triple bar’ menu would probably have been `MDDropDownMenu`.

```
from kivy.lang import Builder
from kivy.metrics import dp

from kivymd.app import MDApp
from kivymd.uix.menu import MDDropdownMenu
from kivymd.uix.snackbar import Snackbar

KV = '''
MDBoxLayout:
    orientation: "vertical"

    MDTopAppBar:
        title: "MDTopAppBar"
        left_action_items: [["menu", lambda x: app.callback(x)]]
        right_action_items: [["dots-vertical", lambda x: app.callback(x)]"]
'''
```

(continues on next page)

(continued from previous page)

```

MDLabel:
    text: "Content"
    halign: "center"
    ...

class Test(MDApp):
    def build(self):
        menu_items = [
            {
                "viewclass": "OneLineListItem",
                "text": f"Item {i}",
                "height": dp(56),
                "on_release": lambda x=f"Item {i}": self.menu_callback(x),
            } for i in range(5)
        ]
        self.menu = MDDropdownMenu(
            items=menu_items,
            width_mult=4,
        )
        return Builder.load_string(KV)

    def callback(self, button):
        self.menu.caller = button
        self.menu.open()

    def menu_callback(self, text_item):
        self.menu.dismiss()
        Snackbar(text=text_item).open()

Test().run()

```

## Position

### Bottom position

See also:

*position*

```

from kivy.lang import Builder
from kivy.metrics import dp
from kivy.properties import StringProperty

from kivymd.uix.list import OneLineIconListItem
from kivymd.app import MDApp
from kivymd.uix.menu import MDDropdownMenu

```

(continues on next page)

(continued from previous page)

```

KV = """
<IconListItem>

    IconLeftWidget:
        icon: root.icon


MDScreen

    MDTextField:
        id: field
        pos_hint: {'center_x': .5, 'center_y': .6}
        size_hint_x: None
        width: "200dp"
        hint_text: "Password"
        on_focus: if self.focus: app.menu.open()
    ...

class IconListItem(OneLineIconListItem):
    icon = StringProperty()

class Test(MDApp):
    def __init__(self, **kwargs):
        super().__init__(**kwargs)
        self.screen = Builder.load_string(KV)
        menu_items = [
            {
                "viewclass": "IconListItem",
                "icon": "git",
                "height": dp(56),
                "text": f"Item {i}",
                "on_release": lambda x=f"Item {i}": self.set_item(x),
            } for i in range(5)]
        self.menu = MDDropdownMenu(
            caller=self.screen.ids.field,
            items=menu_items,
            position="bottom",
            width_mult=4,
        )

    def set_item(self, text__item):
        self.screen.ids.field.text = text__item
        self.menu.dismiss()

    def build(self):
        return self.screen

Test().run()

```

## Center position

```

from kivy.lang import Builder
from kivy.metrics import dp
from kivy.properties import StringProperty

from kivymd.uix.list import OneLineIconListItem
from kivymd.app import MDApp
from kivymd.uix.menu import MDDropdownMenu

KV = '''
<IconListItem>

    IconLeftWidget:
        icon: root.icon


MDScreen

    MDDropDownItem:
        id: drop_item
        pos_hint: {'center_x': .5, 'center_y': .5}
        text: 'Item 0'
        on_release: app.menu.open()
'''


class IconListItem(OneLineIconListItem):
    icon = StringProperty()


class Test(MDApp):
    def __init__(self, **kwargs):
        super().__init__(**kwargs)
        self.screen = Builder.load_string(KV)
        menu_items = [
            {
                "viewclass": "IconListItem",
                "icon": "git",
                "text": f"Item {i}",
                "height": dp(56),
                "on_release": lambda x=f"Item {i}": self.set_item(x),
            } for i in range(5)
        ]
        self.menu = MDDropdownMenu(
            caller=self.screen.ids.drop_item,
            items=menu_items,
            position="center",
            width_mult=4,
        )
        self.menu.bind()

```

(continues on next page)

(continued from previous page)

```
def set_item(self, text_item):
    self.screen.ids.drop_item.set_item(text_item)
    self.menu.dismiss()

def build(self):
    return self.screen

Test().run()
```

## API - kivymd.uix.menu.menu

```
class kivymd.uix.menu.menu.MDDropdownMenu(**kwargs)
```

### Events

#### *on\_release*


The method that will be called when you click menu items.

#### **header\_cls**

An instance of the class (*Kivy* or *KivyMD* widget) that will be added to the menu header.

New in version 0.104.2.

See [Header](#) for more information.

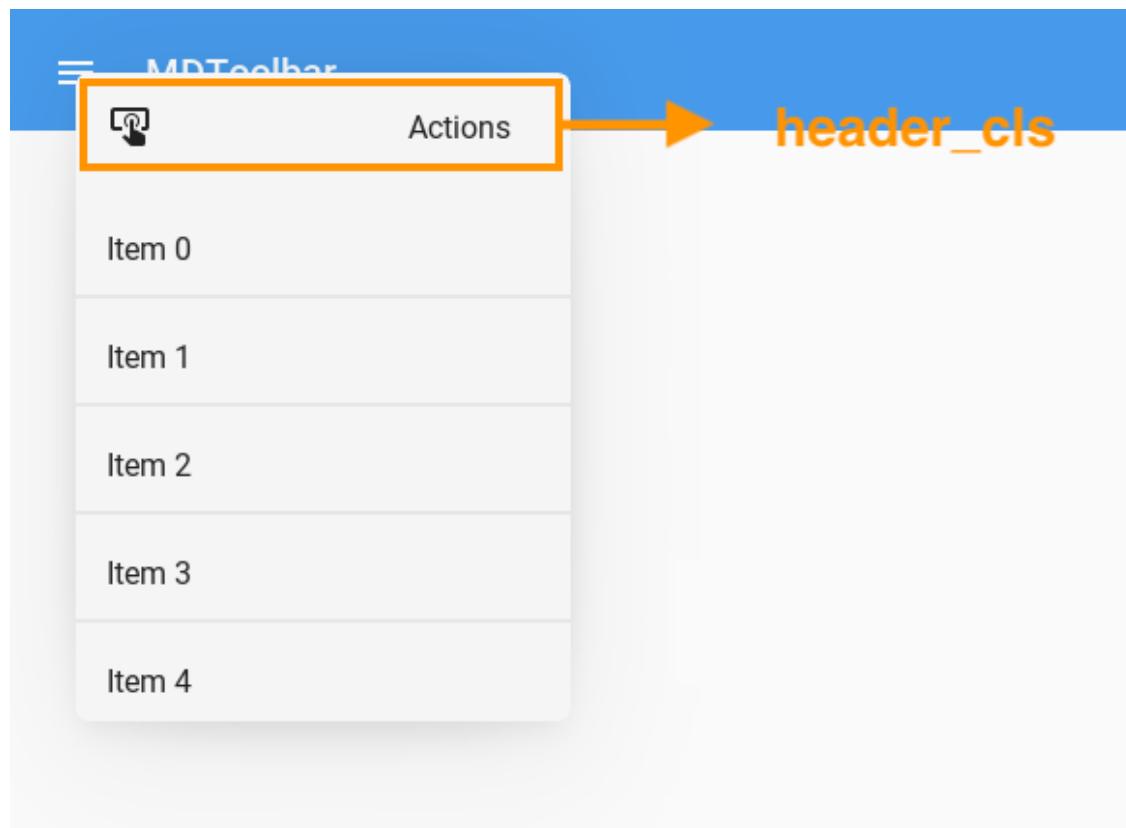


*header\_cls* is a [ObjectProperty](#) and defaults to *None*.

#### items

See [data](#).

```
items = [
    {
        "viewclass": "OneLineListItem",
        "height": dp(56),
        "text": f"Item {i}",
    }
    for i in range(5)
]
self.menu = MDDropdownMenu(
    items=items,
    ...
)
```

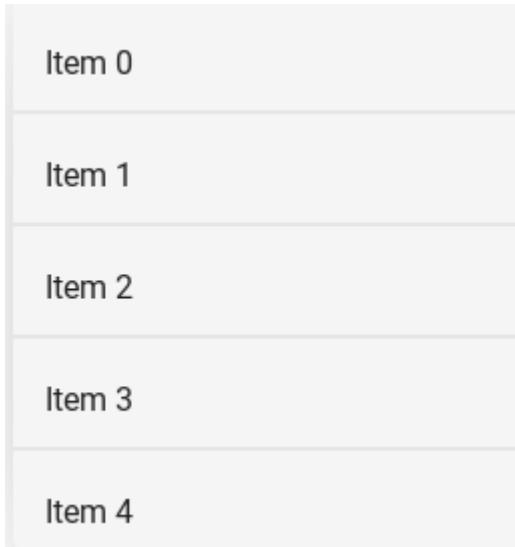


*items* is a [ListProperty](#) and defaults to *[]*.

#### width\_mult

This number multiplied by the standard increment ('56dp' on mobile, '64dp' on desktop), determines the width of the menu items.

If the resulting number were to be too big for the application Window, the multiplier will be adjusted for the biggest possible one.

```
self.menu = MDDropdownMenu(
    width_mult=4,
    ...
)
```

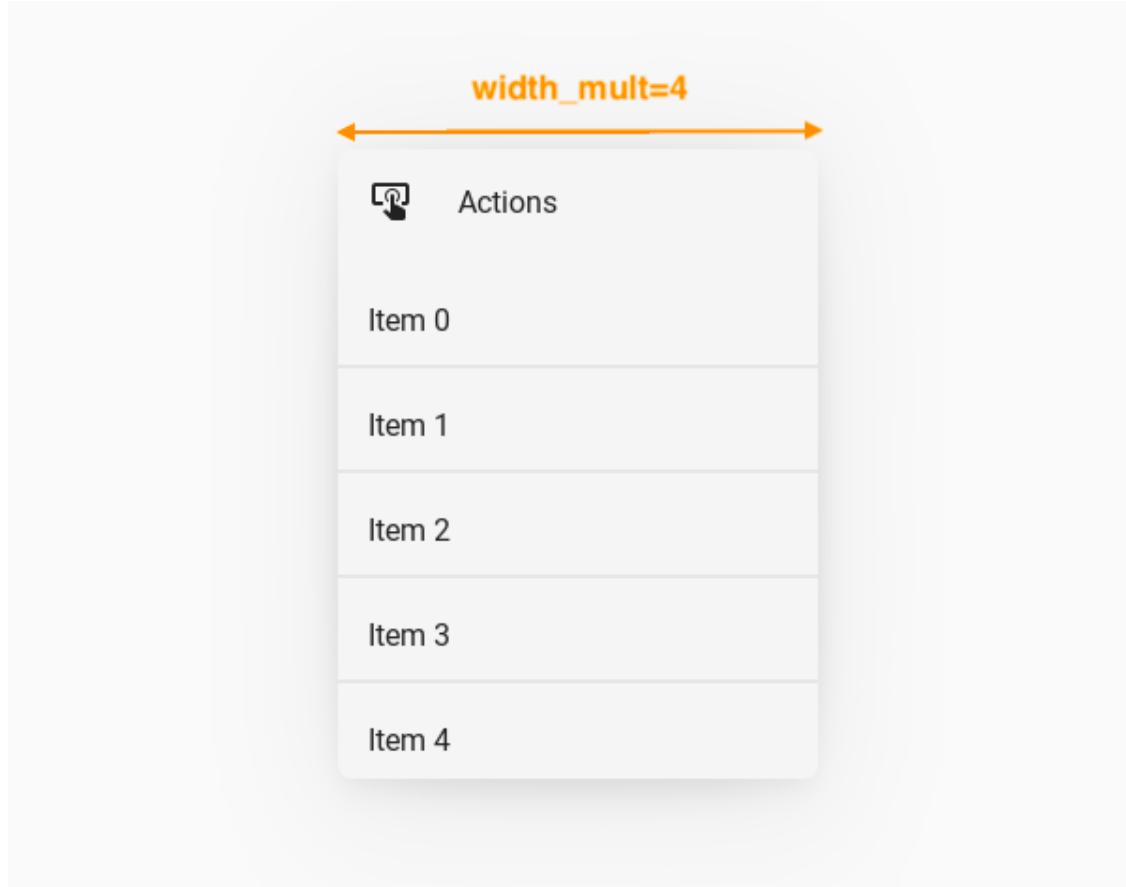

```
self.menu = MDDropdownMenu(  
    width_mult=8,  
    ...,  
)
```



`width_mult` is a [NumericProperty](#) and defaults to `1`.

#### **max\_height**

The menu will grow no bigger than this number. Set to 0 for no limit.

```
self.menu = MDDropdownMenu(  
    max_height=dp(112),  
    ...,  
)
```



max\_height=112

Item 0

Item 1

```
self.menu = MDDropdownMenu(  
    max_height=dp(224),  
    ...,  
)
```



max\_height=224

Item 0

Item 1

Item 2


Item 3

`max_height` is a `NumericProperty` and defaults to 0.


#### border\_margin

Margin between Window border and menu.

```
self.menu = MDDropdownMenu(  
    border_margin=dp(4),  
    ...,  
)
```

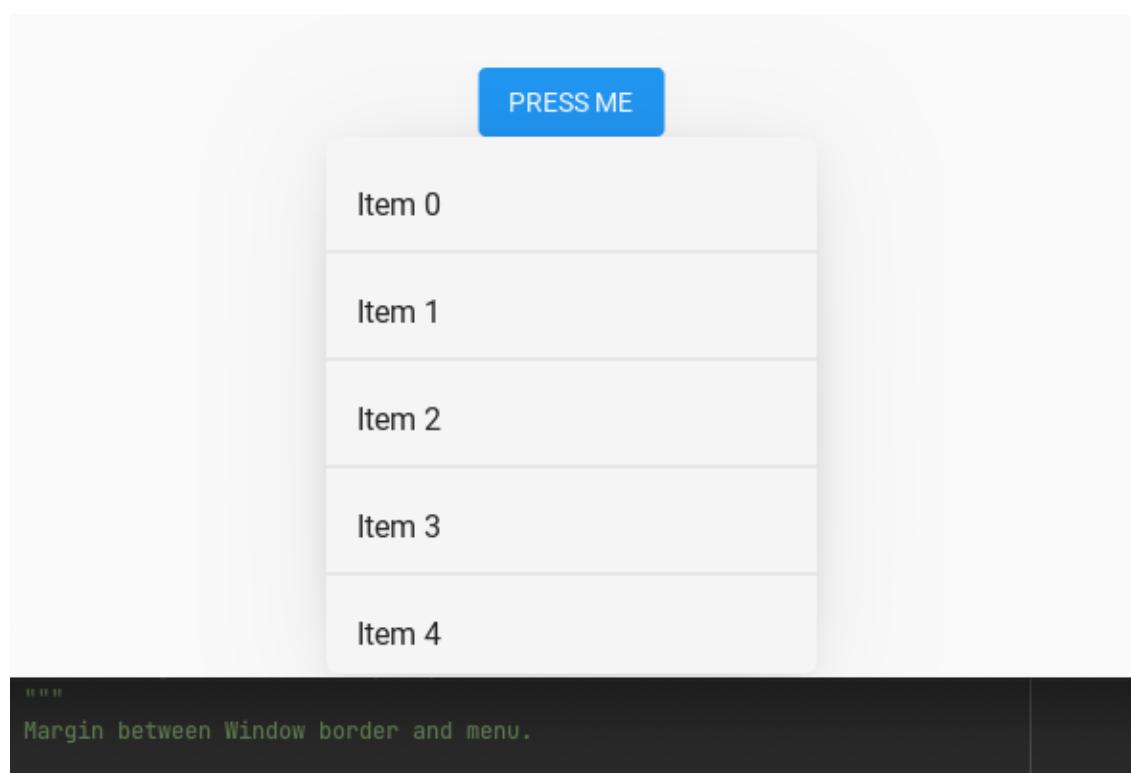

```
self.menu = MDDropdownMenu(  
    border_margin=dp(24),  
    ...,  
)
```

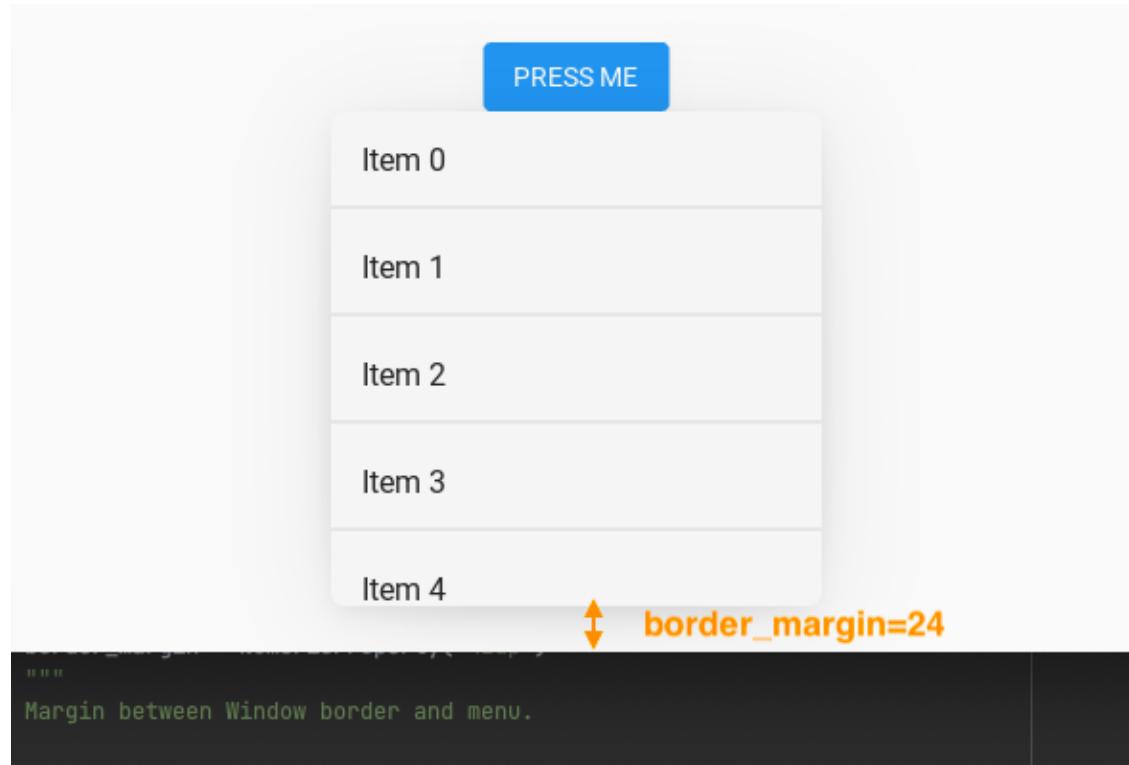

`border_margin` is a `NumericProperty` and defaults to `4dp`.

#### **ver\_growth**

Where the menu will grow vertically to when opening. Set to `None` to let the widget pick for you. Available options are: `'up'`, `'down'`.

```
self.menu = MDDropdownMenu(  
    ver_growth="up",  
    ...,  
)
```

```
self.menu = MDDropdownMenu(  
    ver_growth="down",  
    ...,  
)
```

`ver_growth` is a `OptionProperty` and defaults to `None`.

#### **hor\_growth**

Where the menu will grow horizontally to when opening. Set to `None` to let the widget pick for you. Available options are: `'left'`, `'right'`.

```
self.menu = MDDropdownMenu(  
    hor_growth="left",  
    ...,  
)
```


```
self.menu = MDDropdownMenu(
    hor_growth="right",
    ...,
)
```

*hor\_growth* is a `OptionProperty` and defaults to `None`.

#### **background\_color**

Color in (r, g, b, a) or string format of the background of the menu.

```
self.menu = MDDropdownMenu(
    background_color=self.theme_cls.primary_light,
    ...,
)
```

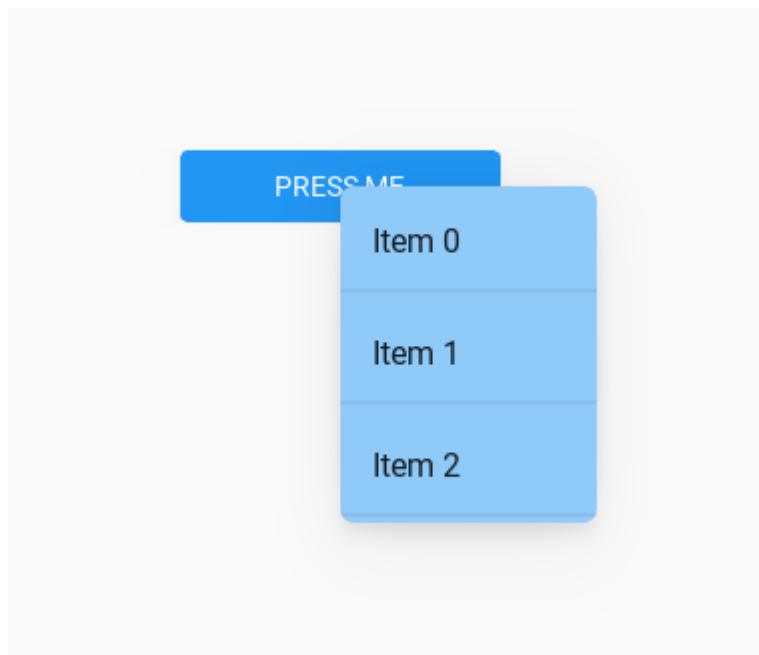

*background\_color* is a `ColorProperty` and defaults to `None`.

#### **opening\_transition**

Type of animation for opening a menu window.

*opening\_transition* is a `StringProperty` and defaults to '`out_cubic`'.

#### **opening\_time**

Menu window opening animation time and you can set it to 0 if you don't want animation of menu opening.

*opening\_time* is a `NumericProperty` and defaults to 0.2.

#### **caller**


The widget object that calls the menu window.

*caller* is a `ObjectProperty` and defaults to `None`.

### position

Menu window position relative to parent element. Available options are: ‘auto’, ‘center’, ‘bottom’.

See [Position](#) for more information.

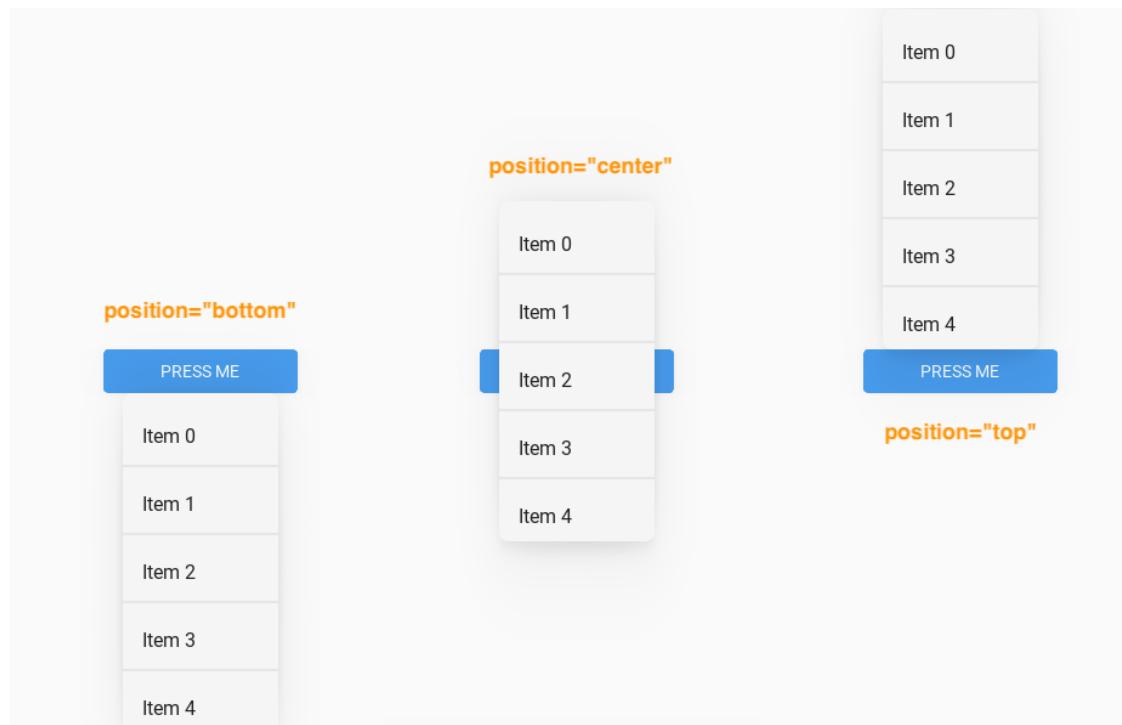


*position* is a OptionProperty and defaults to ‘auto’.

### radius

Menu radius.

```
self.menu = MDDropdownMenu(  
    radius=[24, 0, 24, 0],  
    ...,  
)
```

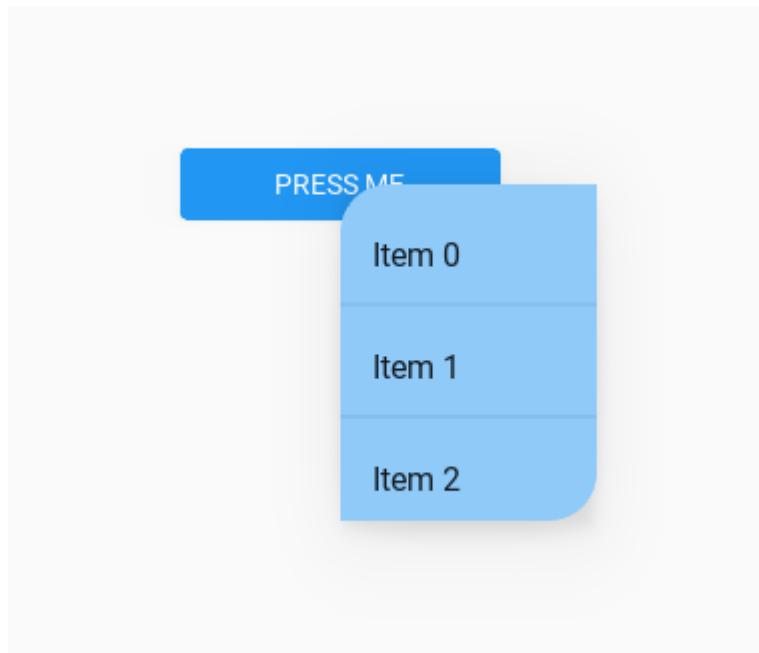

`radius` is a `VariableListProperty` and defaults to '[dp(7)]'.

#### elevation

Elevation value of menu dialog.

New in version 1.0.0.

```
self.menu = MDDropdownMenu(
    elevation=4,
    ...,
)
```



`elevation` is an `NumericProperty` and defaults to 4.

#### check\_position\_caller(self, instance\_window: WindowSDL, width: int, height: int)

Called when the application root window is resized.

#### set\_menu\_properties(self, interval: Union[int, float] = 0)

Sets the size and position for the menu window.

**ajust\_radius(self, interval: Union[int, float])**

Adjusts the radius of the first and last items in the menu list according to the radius that is set for the menu.

**adjust\_position(self)**

Returns value ‘auto’ for the menu position if the menu position is out of screen.

**open(self)**

Animate the opening of a menu window.

**on\_header\_cls(self, instance\_dropdown\_menu, instance\_user\_menu\_header)**

Called when a value is set to the `header_cls` parameter.

**on\_touch\_down(self, touch)**

Receive a touch down event.

#### Parameters

**touch: MotionEvent class**

Touch received. The touch is in parent coordinates. See `relativelayout` for a discussion on coordinate systems.

#### Returns

bool If True, the dispatching of the touch event will stop. If False, the event will continue to be dispatched to the rest of the widget tree.

**on\_touch\_move(self, touch)**

Receive a touch move event. The touch is in parent coordinates.

See `on_touch_down()` for more information.

**on\_touch\_up(self, touch)**

Receive a touch up event. The touch is in parent coordinates.

See `on_touch_down()` for more information.

**on\_dismiss(self)**

Called when the menu is closed.

**dismiss(self, \*args)**

Closes the menu.

### 2.3.39 Spinner

#### See also:

Material Design spec, Menus

Circular progress indicator in Google's Material Design.

### Usage

```
from kivy.lang import Builder

from kivymd.app import MDApp

KV = '''
MDScreen:

    MDSpinner:
        size_hint: None, None
        size: dp(46), dp(46)
        pos_hint: {'center_x': .5, 'center_y': .5}
        active: True if check.active else False

    MDCheckbox:
        id: check
        size_hint: None, None
        size: dp(48), dp(48)
        pos_hint: {'center_x': .5, 'center_y': .4}
        active: True
    ...

class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

Test().run()
```

### Spinner palette

```
MDSpinner:
    # The number of color values can be any.
    palette:
        [0.28627450980392155, 0.8431372549019608, 0.596078431372549, 1],           [0.
        ↵ 3568627450980392, 0.3215686274509804, 0.8666666666666667, 1],                   [0.
        ↵ 8862745098039215, 0.36470588235294116, 0.592156862745098, 1],                   [0.
        ↵ 8784313725490196, 0.9058823529411765, 0.40784313725490196, 1],
```

```
MDSpinner(
    size_hint=(None, None),
    size=(dp(46), dp(46)),
    pos_hint={'center_x': .5, 'center_y': .5},
    active=True,
    palette=[
```

(continues on next page)

(continued from previous page)

```
[0.28627450980392155, 0.8431372549019608, 0.596078431372549, 1],  
[0.3568627450980392, 0.3215686274509804, 0.8666666666666667, 1],  
[0.8862745098039215, 0.36470588235294116, 0.592156862745098, 1],  
[0.8784313725490196, 0.9058823529411765, 0.40784313725490196, 1],  
]  
)
```

## Determinate mode

```
from kivy.lang import Builder  
  
from kivymd.app import MDApp  
  
KV = '''  
MDScreen:  
  
    MDSpinner:  
        size_hint: None, None  
        size: dp(48), dp(48)  
        pos_hint: {'center_x': .5, 'center_y': .5}  
        determinate: True  
'''  
  
class Test(MDApp):  
    def build(self):  
        return Builder.load_string(KV)  
  
Test().run()
```

## API - kivymd.uix.spinner.spinner

```
class kivymd.uix.spinner.MDSpinner(**kwargs)
```

*MDSpinner* is an implementation of the circular progress indicator in *Google's Material Design*.

It can be used either as an indeterminate indicator that loops while the user waits for something to happen, or as a determinate indicator.

Set *determinate* to **True** to activate determinate mode, and *determinate\_time* to set the duration of the animation.

### Events

*on\_determinate\_complete*

The event is called at the end of the spinner loop in the *determinate = True* mode.

**determinate**

Determinate value.

`determinate` is a `BooleanProperty` and defaults to `False`.

**determinate\_time**

Determinate time value.

`determinate_time` is a `NumericProperty` and defaults to 2.

**line\_width**

Progress line width of spinner.

`line_width` is a `NumericProperty` and defaults to `dp(2.25)`.

**active**

Use `active` to start or stop the spinner.

`active` is a `BooleanProperty` and defaults to `True`.

**color**

Spinner color in (r, g, b, a) or string format.

`color` is a `ColorProperty` and defaults to `[0, 0, 0, 0]`.

**palette**

A set of colors. Changes with each completed spinner cycle.

`palette` is a `ListProperty` and defaults to `[]`.

**on\_\_rotation\_angle(self, \*args)****on\_palette(self, instance\_spinner, palette\_list: list)****on\_active(self, instance\_spinner, active\_value: bool)****on\_determinate\_complete(self, \*args)**

The event is called at the end of the spinner loop in the `determinate = True` mode.


**check\_determinate(self, interval: Union[float, int] = 0)**

### 2.3.40 Tabs

#### See also:

Material Design spec, Tabs

**Tabs organize content across different screens, data sets, and other interactions.**

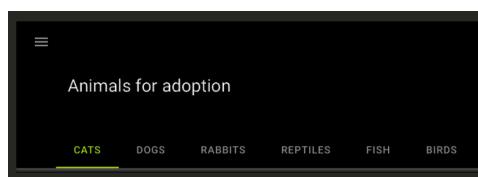

---

**Note:** Module provides tabs in the form of icons or text.

---

### Usage

To create a tab, you must create a new class that inherits from the `MDTabsBase` class and the *Kivy* container, in which you will create content for the tab.

```
class Tab(MDFloatLayout, MDTabsBase):  
    '''Class implementing content for a tab.'''
```

```
<Tab>
```

```
MDLabel:  
    text: root.content_text  
    pos_hint: {"center_x": .5, "center_y": .5}
```

All tabs must be contained inside a `MDTabs` widget:

```
Root:
```

```
MDTabs:  
  
    Tab:  
        title: "Tab 1"  
        content_text: f"This is an example text for {self.title}"  
  
    Tab:  
        title: "Tab 2"  
        content_text: f"This is an example text for {self.title}"  
  
    ...
```

### Example with tab icon

Declarative KV and imperative python styles

```
from kivy.lang import Builder  
  
from kivymd.app import MDApp  
from kivymd.uix.tab import MDTabsBase  
from kivymd.uix.floatlayout import MDFloatLayout  
from kivymd.icon_definitions import md_icons  
  
KV = '''  
MDBoxLayout:  
    orientation: "vertical"  
  
    MDTopAppBar:  
        title: "Example Tabs"
```

(continues on next page)

(continued from previous page)

```

MDTabs:
    id: tabs
    on_tab_switch: app.on_tab_switch(*args)

<Tab>

MDIconButton:
    id: icon
    icon: root.icon
    icon_size: "48sp"
    pos_hint: {"center_x": .5, "center_y": .5}
...
'''
```

**class Tab(MDFloatLayout, MDTabsBase):**

    '''Class implementing content for a tab.'''

**class Example(MDApp):**

    icons = list(md\_icons.keys())[15:30]

**def build(self):**
 self.theme\_cls.theme\_style = "Dark"
 self.theme\_cls.primary\_palette = "Orange"
 return Builder.load\_string(KV)

**def on\_start(self):**
 for tab\_name in self.icons:
 self.root.ids.tabs.add\_widget(Tab(icon=tab\_name))

**def on\_tab\_switch(**
 self, instance\_tabs, instance\_tab, instance\_tab\_label, tab\_text
 **):**
 ...
 Called when switching tabs.

**:type instance\_tabs: <kivymd.uix.tab.MDTabs object>;**
**:param instance\_tab: <\_\_main\_\_.Tab object>;**
**:param instance\_tab\_label: <kivymd.uix.tab.MDTabsLabel object>;**
**:param tab\_text: text or name icon of tab;**
 ...

            count\_icon = instance\_tab.icon # get the tab icon
 print(f"Welcome to {count\_icon}' tab'{")

**Example().run()**

Declarative python styles

```
from kivymd.app import MDApp
from kivymd.uix.boxlayout import MDBBoxLayout
from kivymd.uix.button import MDIconButton
from kivymd.uix.tab import MDTabsBase, MDTabs
from kivymd.uix.floatlayout import MDFloatLayout
from kivymd.icon_definitions import md_icons
from kivymd.uix.toolbar import MDTopAppBar

class Tab(MDFloatLayout, MDTabsBase):
    '''Class implementing content for a tab.'''

class Example(MDApp):
    icons = list(md_icons.keys())[15:30]

    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return (
            MDBBoxLayout(
                MDTopAppBar(title="Example Tabs"),
                MDTabs(id="tabs"),
                orientation="vertical",
            )
        )

    def on_start(self):
        self.root.ids.tabs.bind(on_tab_switch=self.on_tab_switch)

        for tab_name in self.icons:
            self.root.ids.tabs.add_widget(
                Tab(
                    MDIconButton(
                        icon=tab_name,
                        icon_size="48sp",
                        pos_hint={"center_x": .5, "center_y": .5},
                    ),
                    icon=tab_name,
                )
            )

    def on_tab_switch(
        self, instance_tabs, instance_tab, instance_tab_label, tab_text
    ):
        ...
        Called when switching tabs.

        :type instance_tabs: <kivymd.uix.tab.MDTabs object>;
        :param instance_tab: <__main__.Tab object>;
        :param instance_tab_label: <kivymd.uix.tab.MDTabsLabel object>;
        :param tab_text: text or name icon of tab;
```

(continues on next page)

(continued from previous page)

```

    ...
    count_icon = instance_tab.icon # get the tab icon
    print(f"Welcome to {count_icon}' tab'")

Example().run()

```

## Example with tab text

**Note:** The `MDTabsBase` class has an icon parameter and, by default, tries to find the name of the icon in the file `kivymd/icon_definitions.py`.

If the name of the icon is not found, the class will send a message stating that the icon could not be found.

If the tab has no icon, title or tab\_label\_text, the class will raise a ValueError.

Declarative KV and imperative python styles

```

from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.floatlayout import MDFloatLayout
from kivymd.uix.tab import MDTabsBase

KV = '''
MDBoxLayout:
    orientation: "vertical"

    MDTopAppBar:
        title: "Example Tabs"

    MDTabs:
        id: tabs
        on_tab_switch: app.on_tab_switch(*args)

<Tab>

    MDLabel:
        id: label
        text: "Tab 0"
        halign: "center"
    ...

class Tab(MDFloatLayout, MDTabsBase):
    '''Class implementing content for a tab.'''

```

(continues on next page)

(continued from previous page)

```

class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return Builder.load_string(KV)

    def on_start(self):
        for i in range(20):
            self.root.ids.tabs.add_widget(Tab(title=f"Tab {i}"))

    def on_tab_switch(
        self, instance_tabs, instance_tab, instance_tab_label, tab_text
    ):
        '''Called when switching tabs.

:type instance_tabs: <kivymd.uix.tab.MDTabs object>;
:param instance_tab: <__main__.Tab object>;
:param instance_tab_label: <kivymd.uix.tab.MDTabsLabel object>;
:param tab_text: text or name icon of tab;
'''

        instance_tab.ids.label.text = tab_text

Example().run()

```

Declarative python style

```

from kivymd.app import MDApp
from kivymd.uix.boxlayout import MDBBoxLayout
from kivymd.uix.floatlayout import MDFloatLayout
from kivymd.uix.label import MDLabel
from kivymd.uix.tab import MDTabsBase, MDTabs
from kivymd.uix.toolbar import MDTopAppBar


class Tab(MDFloatLayout, MDTabsBase):
    '''Class implementing content for a tab.'''


class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return (
            MDBBoxLayout(
                MDTopAppBar(title="Example Tabs"),
                MDTabs(id="tabs"),
                orientation="vertical",
            )
        )

```

(continues on next page)

(continued from previous page)

```

def on_start(self):
    self.root.ids.tabs.bind(on_tab_switch=self.on_tab_switch)
    for i in range(20):
        self.root.ids.tabs.add_widget(
            Tab(
                MDLabel(id="label", text="Tab 0", halign="center"),
                title=f"Tab {i}",
            )
        )

def on_tab_switch(
    self, instance_tabs, instance_tab, instance_tab_label, tab_text
):
    ...
    Called when switching tabs.

:type instance_tabs: <kivymd.uix.tab.MDTabs object>;
:param instance_tab: <__main__.Tab object>;
:param instance_tab_label: <kivymd.uix.tab.MDTabsLabel object>;
:param tab_text: text or name icon of tab;
...

    instance_tab.ids.label.text = tab_text

```

Example().run()

### Example with tab icon and text

Declarative KV and imperative python styles

```

from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.tab import MDTabsBase
from kivymd.uix.floatlayout import MDFloatLayout
from kivymd.icon_definitions import md_icons

KV = '''
MDBoxLayout:
    orientation: "vertical"

    MDTopAppBar:
        title: "Example Tabs"

    MDTabs:
        id: tabs
'''

```

(continues on next page)

(continued from previous page)

```

class Tab(MDFloatLayout, MDTabsBase):
    pass

class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return Builder.load_string(KV)

    def on_start(self):
        for name_tab in list(md_icons.keys())[15:30]:
            self.root.ids.tabs.add_widget(Tab(icon=name_tab, title=name_tab))

Example().run()

```

Declarative python style

```

from kivymd.app import MDApp
from kivymd.uix.boxlayout import MDBBoxLayout
from kivymd.uix.tab import MDTabsBase, MDTabs
from kivymd.uix.floatlayout import MDFloatLayout
from kivymd.icon_definitions import md_icons
from kivymd.uix.toolbar import MDTopAppBar

class Tab(MDFloatLayout, MDTabsBase):
    pass

class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return (
            MDBBoxLayout(
                MDTopAppBar(title="Example Tabs"),
                MDTabs(id="tabs"),
                orientation="vertical",
            )
        )

    def on_start(self):
        for name_tab in list(md_icons.keys())[15:30]:
            self.root.ids.tabs.add_widget(Tab(icon=name_tab, title=name_tab))

Example().run()

```

## Dynamic tab management

Declarative KV and imperative python styles

```
from kivy.lang import Builder

from kivymd.uix.scrollview import MDScrollView
from kivymd.app import MDApp
from kivymd.uix.tab import MDTabsBase

KV = '''
MDBoxLayout:
    orientation: "vertical"

    MDTopAppBar:
        title: "Example Tabs"

    MDTabs:
        id: tabs

<Tab>
    MDList:

        MDBoxLayout:
            adaptive_height: True

            MDFlatButton:
                text: "ADD TAB"
                on_release: app.add_tab()

            MDFlatButton:
                text: "REMOVE LAST TAB"
                on_release: app.remove_tab()

            MDFlatButton:
                text: "GET TAB LIST"
                on_release: app.get_tab_list()
    ...

class Tab(MDScrollView, MDTabsBase):
    '''Class implementing content for a tab.'''
    ...

class Example(MDApp):
    index = 0

    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return Builder.load_string(KV)
```

(continues on next page)

(continued from previous page)

```

def on_start(self):
    self.add_tab()

def get_tab_list(self):
    '''Prints a list of tab objects.'''

    print(self.root.ids.tabs.get_tab_list())

def add_tab(self):
    self.index += 1
    self.root.ids.tabs.add_widget(Tab(title=f"{self.index} tab"))

def remove_tab(self):
    if self.index > 1:
        self.index -= 1
    self.root.ids.tabs.remove_widget(
        self.root.ids.tabs.get_tab_list()[-1]
)

```

Example().run()

Declarative python style

```

from kivymd.uix.button import MDFlatButton
from kivymd.uix.list import MDList
from kivymd.uix.scrollview import MDScrollView
from kivymd.app import MDApp
from kivymd.uix.boxlayout import MDBoxLayout
from kivymd.uix.tab import MDTabsBase, MDTabs
from kivymd.uix.toolbar import MDTopAppBar


class Tab(MDScrollView, MDTabsBase):
    '''Class implementing content for a tab.'''


class Example(MDApp):
    index = 0

    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return (
            MDBoxLayout(
                MDTopAppBar(title="Example Tabs"),
                MDTabs(id="tabs"),
                orientation="vertical",
            )
        )

```

(continues on next page)

(continued from previous page)

```
def on_start(self):
    self.add_tab()

def get_tab_list(self, *args):
    '''Prints a list of tab objects.'''

    print(self.root.ids.tabs.get_tab_list())

def add_tab(self, *args):
    self.index += 1
    self.root.ids.tabs.add_widget(
        Tab(
            MDList(
                MDBBoxLayout(
                    MDFlatButton(
                        text="ADD TAB",
                        on_release=self.add_tab,
                    ),
                    MDFlatButton(
                        text="REMOVE LAST TAB",
                        on_release=self.remove_tab,
                    ),
                    MDFlatButton(
                        text="GET TAB LIST",
                        on_release=self.get_tab_list,
                    ),
                    adaptive_height=True,
                ),
                title=f"{self.index} tab",
            )
        )
    )

def remove_tab(self, *args):
    if self.index > 1:
        self.index -= 1
    self.root.ids.tabs.remove_widget(
        self.root.ids.tabs.get_tab_list()[-1]
    )
```

```
Example().run()
```

## Use `on_ref_press` method

You can use markup for the text of the tabs and use the `on_ref_press` method accordingly:

Declarative KV and imperative python styles

```
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.floatlayout import MDFloatLayout
from kivymd.font_definitions import fonts
from kivymd.uix.tab import MDTabsBase
from kivymd.icon_definitions import md_icons

KV = '''
MDBoxLayout:
    orientation: "vertical"

    MDTopAppBar:
        title: "Example Tabs"

    MDTabs:
        id: tabs
        on_ref_press: app.on_ref_press(*args)

<Tab>

    MDIconButton:
        id: icon
        icon: app.icons[0]
        icon_size: "48sp"
        pos_hint: {"center_x": .5, "center_y": .5}
'''


class Tab(MDFloatLayout, MDTabsBase):
    '''Class implementing content for a tab.'''


class Example(MDApp):
    icons = list(md_icons.keys())[15:30]

    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return Builder.load_string(KV)

    def on_start(self):
        for name_tab in self.icons:
            self.root.ids.tabs.add_widget(
                Tab(
                    title=f"[ref={name_tab}][font={fonts[-1]['fn_regular']}]{md_icons[
```

(continues on next page)

(continued from previous page)

```

↳'close']}{/font}{/ref}  {name_tab}"
        )
    )

def on_ref_press(
    self,
    instance_tabs,
    instance_tab_label,
    instance_tab,
    instance_tab_bar,
    instance_carousel,
):
    ...
    The method will be called when the ``on_ref_press`` event
    occurs when you, for example, use markup text for tabs.

    :param instance_tabs: <kivymd.uix.tab.MDTabs object>
    :param instance_tab_label: <kivymd.uix.tab.MDTabsLabel object>
    :param instance_tab: <__main__.Tab object>
    :param instance_tab_bar: <kivymd.uix.tab.MDTabsBar object>
    :param instance_carousel: <kivymd.uix.tab.MDTabsCarousel object>
    ...

# Removes a tab by clicking on the close icon on the left.
for instance_tab in instance_carousel.slides:
    if instance_tab.title == instance_tab_label.text:
        instance_tabs.remove_widget(instance_tab_label)
        break

```

Example().run()

Declarative python style

```

from kivymd.app import MDApp
from kivymd.uix.boxlayout import MDBBoxLayout
from kivymd.uix.button import MDIconButton
from kivymd.uix.floatlayout import MDFloatLayout
from kivymd.font_definitions import fonts
from kivymd.uix.tab import MDTabsBase, MDTabs
from kivymd.icon_definitions import md_icons
from kivymd.uix.toolbar import MDTopAppBar

class Tab(MDFloatLayout, MDTabsBase):
    '''Class implementing content for a tab.'''

class Example(MDApp):
    icons = list(md_icons.keys())[15:30]

    def build(self):

```

(continues on next page)

(continued from previous page)

```

self.theme_cls.theme_style = "Dark"
self.theme_cls.primary_palette = "Orange"
return (
    MDBBoxLayout(
        MDTopAppBar(title="Example Tabs"),
        MDTabs(id="tabs"),
        orientation="vertical",
    )
)

def on_start(self):
    self.root.ids.tabs.bind(on_ref_press=self.on_ref_press)
    for name_tab in self.icons:
        self.root.ids.tabs.add_widget(
            Tab(
                MDIconButton(
                    icon=self.icons[0],
                    icon_size="48sp",
                    pos_hint={"center_x": .5, "center_y": .5}
                ),
                title=(
                    f"[ref={name_tab}][font={fonts[-1]['fn_regular']}]{md_icons['close']}[/font][/ref] {name_tab}"
                ),
            )
        )
    )

def on_ref_press(
    self,
    instance_tabs,
    instance_tab_label,
    instance_tab,
    instance_tab_bar,
    instance_carousel,
):
    ...
    The method will be called when the ``on_ref_press`` event
    occurs when you, for example, use markup text for tabs.

    :param instance_tabs: <kivymd.uix.tab.MDTabs object>
    :param instance_tab_label: <kivymd.uix.tab.MDTabsLabel object>
    :param instance_tab: <__main__.Tab object>
    :param instance_tab_bar: <kivymd.uix.tab.MDTabsBar object>
    :param instance_carousel: <kivymd.uix.tab.MDTabsCarousel object>
    ...

    # Removes a tab by clicking on the close icon on the left.
    for instance_tab in instance_carousel.slides:
        if instance_tab.title == instance_tab_label.text:
            instance_tabs.remove_widget(instance_tab_label)
            break

```

(continues on next page)

(continued from previous page)

```
Example().run()
```

## Switching the tab by name

Declarative KV and imperative python styles

```
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.icon_definitions import md_icons
from kivymd.uix.floatlayout import MDFloatLayout
from kivymd.uix.tab import MDTabsBase

KV = '''
MDBoxLayout:
    orientation: "vertical"

    MDTopAppBar:
        title: "Example Tabs"

    MDTabs:
        id: tabs

<Tab>

    MDBoxLayout:
        orientation: "vertical"
        pos_hint: {"center_x": .5, "center_y": .5}
        adaptive_size: True
        spacing: dp(48)

        MDIconButton:
            id: icon
            icon: "arrow-right"
            icon_size: "48sp"
            on_release: app.switch_tab_by_name()

        MDIconButton:
            id: icon2
            icon: "page-next"
            icon_size: "48sp"
            on_release: app.switch_tab_by_object()
    ...

class Tab(MDFloatLayout, MDTabsBase):
    '''Class implementing content for a tab.'''

```

(continues on next page)

(continued from previous page)

```

class Example(MDApp):
    icons = list(md_icons.keys())[15:30]

    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        self.iter_list_names = iter(list(self.icons))
        return Builder.load_string(KV)

    def on_start(self):
        for name_tab in list(self.icons):
            self.root.ids.tabs.add_widget(Tab(tab_label_text=name_tab))
        self.iter_list_objects = iter(list(self.root.ids.tabs.get_tab_list()))

    def switch_tab_by_object(self):
        try:
            x = next(self.iter_list_objects)
            print(f"Switch slide by object, next element to show: [{x}]")
            self.root.ids.tabs.switch_tab(x)
        except StopIteration:
            # reset the iterator an begin again.
            self.iter_list_objects = iter(list(self.root.ids.tabs.get_tab_list()))
            self.switch_tab_by_object()

    def switch_tab_by_name(self):
        '''Switching the tab by name.'''

        try:
            x = next(self.iter_list_names)
            print(f"Switch slide by name, next element to show: [{x}]")
            self.root.ids.tabs.switch_tab(x)
        except StopIteration:
            # Reset the iterator an begin again.
            self.iter_list_names = iter(list(self.icons))
            self.switch_tab_by_name()

Example().run()

```

Declarative python style

```

from kivy.metrics import dp

from kivymd.app import MDApp
from kivymd.icon_definitions import md_icons
from kivymd.uix.boxlayout import MDBBoxLayout
from kivymd.uix.button import MDIconButton
from kivymd.uix.floatlayout import MDFloatLayout
from kivymd.uix.tab import MDTabsBase, MDTabs
from kivymd.uix.toolbar import MDTopAppBar

```

(continues on next page)

(continued from previous page)

```

class Tab(MDFloatLayout, MDTabsBase):
    '''Class implementing content for a tab.'''

class Example(MDApp):
    icons = list(md_icons.keys())[15:30]

    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        self.iter_list_names = iter(list(self.icons))
        return (
            MDBBoxLayout(
                MDTopAppBar(title="Example Tabs"),
                MDTabs(id="tabs"),
                orientation="vertical",
            )
        )

    def on_start(self):
        for name_tab in list(self.icons):
            self.root.ids.tabs.add_widget(
                Tab(
                    MDBBoxLayout(
                        MDIconButton(
                            id="icon",
                            icon="arrow-right",
                            icon_size="48sp",
                            on_release=self.switch_tab_by_name,
                        ),
                        MDIconButton(
                            id="icon2",
                            icon="arrow-left",
                            icon_size="48sp",
                            on_release=self.switch_tab_by_object,
                        ),
                        orientation="vertical",
                        pos_hint={"center_x": .5, "center_y": .5},
                        adaptive_size=True,
                        spacing=dp(48),
                    ),
                    tab_label_text=name_tab,
                )
            )
            self.iter_list_objects = iter(list(self.root.ids.tabs.get_tab_list()))

    def switch_tab_by_object(self, *args):
        try:
            x = next(self.iter_list_objects)

```

(continues on next page)

(continued from previous page)

```

        print(f"Switch slide by object, next element to show: [{x}]")
        self.root.ids.tabs.switch_tab(x)
    except StopIteration:
        # reset the iterator an begin again.
        self.iter_list_objects = iter(
            list(self.root.ids.tabs.get_tab_list()))
        self.switch_tab_by_object()

def switch_tab_by_name(self, *args):
    '''Switching the tab by name.'''

    try:
        x = next(self.iter_list_names)
        print(f"Switch slide by name, next element to show: [{x}]")
        self.root.ids.tabs.switch_tab(x)
    except StopIteration:
        # Reset the iterator an begin again.
        self.iter_list_names = iter(list(self.icons))
        self.switch_tab_by_name()

```

Example().run()

## API - kivymd.uix.tab.tab

**class kivymd.uix.tab.tab.MDTabsBase(\*args, \*\*kwargs)**

This class allow you to create a tab. You must create a new class that inherits from MDTabsBase. In this way you have total control over the views of your tabbed panel.

**icon**

This property will set the Tab's Label Icon.

*icon* is an `StringProperty` and defaults to ‘’.

**title\_icon\_mode**

This property sets the mode in which the tab's title and icon are shown.

*title\_icon\_mode* is an `OptionProperty` and defaults to ‘Lead’.

**title**

This property will set the Name of the tab.

**Note:** As a side note.

All tabs have set *markup* = *True*. Thanks to this, you can use the kivy markup language to set a colorful and fully customizable tabs titles.

**Warning:** The material design requires that every title label is written in capital letters, because of this, the `string.upper()` will be applied to it's contents.

`title` is an `StringProperty` and defaults to ''.

#### **title\_is\_capital**

This value controls whether if the title property should be converted to capital letters.

`title_is_capital` is an `BooleanProperty` and defaults to `True`.

#### **tab\_label\_text**

This property is the actual title's Label of the tab. use the property `icon` and `title` to set this property correctly.

This property is kept public for specific and backward compatibility purposes.

`tab_label_text` is an `StringProperty` and defaults to ''.

#### **tab\_label**

It is the label object reference of the tab.

`tab_label` is an `ObjectProperty` and defaults to `None`.

#### **tab\_label\_font\_style**

`tab_label_font_style` is an `AliasProperty` that behaves similar to an `OptionProperty`.

This property's behavior allows the developer to use any new label style registered to the app.

This property will affect the Tab's Title Label widget.

`update_label_text(self, instance_user_tab, text_tab: str)`

`class kivymd.uix.tab.tab.MDTabs(*args, **kwargs)`

You can use this class to create your own tabbed panel.

### Events

#### **on\_tab\_switch**

Called when switching tabs.

#### **on\_slide\_progress**

Called while the slide is scrolling.

#### **on\_ref\_press**

The method will be called when the `on_ref_press` event occurs when you, for example, use markup text for tabs.

#### **tab\_bar\_height**

Height of the tab bar.

`tab_bar_height` is an `NumericProperty` and defaults to '48dp'.

#### **tab\_padding**

Padding of the tab bar.

`tab_padding` is an `ListProperty` and defaults to [0, 0, 0, 0].

#### **tab\_indicator\_anim**

Tab indicator animation. If you want use animation set it to `True`.

`tab_indicator_anim` is an `BooleanProperty` and defaults to `False`.

#### **tab\_indicator\_height**

Height of the tab indicator.

`tab_indicator_height` is an `NumericProperty` and defaults to '2dp'.

### **tab\_indicator\_type**

Type of tab indicator. Available options are: ‘line’, ‘fill’, ‘round’, ‘line-rect’ and ‘line-round’.

*tab\_indicator\_type* is an [OptionProperty](#) and defaults to ‘line’.

### **tab\_hint\_x**

This option affects the size of each child. if it’s *True*, the size of each tab will be ignored and will use the size available by the container.

*tab\_hint\_x* is an [BooleanProperty](#) and defaults to *False*.

### **anim\_duration**

Duration of the slide animation.

*anim\_duration* is an [NumericProperty](#) and defaults to *0.2*.

### **anim\_threshold**

Animation threshold allow you to change the tab indicator animation effect.

*anim\_threshold* is an [BoundedNumericProperty](#) and defaults to *0.8*.

### **allow\_stretch**

If *True*, the tab will update dynamically (if *tab\_hint\_x* is *True*) to it’s content width, and wrap any text if the widget is wider than “*360dp*”.

If *False*, the tab won’t update to it’s maximum texture width. this means that the *fixed\_tab\_label\_width* will be used as the label width. this will wrap any text inside to fit the fixed value.

*allow\_stretch* is an [BooleanProperty](#) and defaults to *True*.

### **fixed\_tab\_label\_width**

If *allow\_stretch* is *False*, the class will set this value as the width to all the tabs title label.

*fixed\_tab\_label\_width* is an [NumericProperty](#) and defaults to *140dp*.

### **background\_color**

Background color of tabs in (r, g, b, a) or string format.

*background\_color* is an [ColorProperty](#) and defaults to *None*.

### **underline\_color**

Underline color of tabs in (r, g, b, a) or string format.

*underline\_color* is an [ColorProperty](#) and defaults to *[0, 0, 0, 0]*.

### **text\_color\_normal**

Text color in (r, g, b, a) or string format of the label when it is not selected.

*text\_color\_normal* is an [ColorProperty](#) and defaults to *None*.

### **text\_color\_active**

Text color in (r, g, b, a) or string format of the label when it is selected.

*text\_color\_active* is an [ColorProperty](#) and defaults to *None*.

### **shadow\_softness**

See `kivymd.uix.behaviors.CommonElevationBehavior.shadow_softness` attribute.

New in version 1.1.0.

*shadow\_softness* is an [NumericProperty](#) and defaults to *12*.

**shadow\_color**

See `kivymd.uix.behaviors.CommonElevationBehavior.shadow_color` attribute.

New in version 1.1.0.

`shadow_color` is an `ColorProperty` and defaults to `[0, 0, 0, 0.6]`.

**shadow\_offset**

See `kivymd.uix.behaviors.CommonElevationBehavior.shadow_offset` attribute.

New in version 1.1.0.

`shadow_offset` is an `ListProperty` and defaults to `[0, 0]`.

**elevation**

See `kivymd.uix.behaviors.CommonElevationBehavior.elevation` attribute.

`elevation` is an `NumericProperty` and defaults to `0`.

**indicator\_color**

Color indicator in (r, g, b, a) or string format.

`indicator_color` is an `ColorProperty` and defaults to `None`.

**lock\_swiping**

If True - disable switching tabs by swipe.

`lock_swiping` is an `BooleanProperty` and defaults to `False`.

**font\_name**

Font name for tab text.

`font_name` is an `StringProperty` and defaults to `'Roboto'`.

**ripple\_duration**

Ripple duration when long touching to tab.

`ripple_duration` is an `NumericProperty` and defaults to `2`.

**no\_ripple\_effect**

Whether to use the ripple effect when tapping on a tab.

`no_ripple_effect` is an `BooleanProperty` and defaults to `True`.

**title\_icon\_mode**

This property sets the mode in which the tab's title and icon are shown.

`title_icon_mode` is an `OptionProperty` and defaults to `'Lead'`.

**force\_title\_icon\_mode**

If this property is set to `True`, it will force the class to update every tab inside the scroll view to the current `title_icon_mode`

`force_title_icon_mode` is an `BooleanProperty` and defaults to `True`.

**update\_icon\_color(self, instance\_theme\_manager: ThemeManager, name\_theme\_style\_name\_palette: str)**

Called when the app's color scheme or style has changed (dark theme/light theme).

**switch\_tab(self, name\_tab: Union[MDTabsLabel, str], search\_by='text')**

This method switches between tabs `name_tab` can be either a String or a `MDTabsBase`.

`search_by` will look up through the properties of every tab.

If the value doesn't match, it will raise a `ValueError`.

**Search\_by options:**

text : will search by the raw text of the label (*tab\_label\_text*)  
icon : will search by the *icon* property  
title : will search by the *title* property

**get\_tab\_list(self)**

Returns a list of MDTabsLabel objects.

**get\_slides(self)**

Returns a list of user tab objects.

**get\_current\_tab(self)**

Returns current tab object.

New in version 1.0.0.

**add\_widget(self, widget, index=0, canvas=None)**

Add a new widget as a child of this widget.

**Parameters****widget: Widget**

Widget to add to our list of children.

**index: int, defaults to 0**

Index to insert the widget in the list. Notice that the default of 0 means the widget is inserted at the beginning of the list and will thus be drawn on top of other sibling widgets. For a full discussion of the index and widget hierarchy, please see the Widgets Programming Guide.

New in version 1.0.5.

**canvas: str, defaults to None**

Canvas to add widget's canvas to. Can be 'before', 'after' or None for the default canvas.

New in version 1.9.0.

```
>>> from kivy.uix.button import Button
>>> from kivy.uix.slider import Slider
>>> root = Widget()
>>> root.add_widget(Button())
>>> slider = Slider()
>>> root.add_widget(slider)
```

**remove\_widget(self, widget)**

Remove a widget from the children of this widget.

**Parameters****widget: Widget**

Widget to remove from our children list.

```
>>> from kivy.uix.button import Button
>>> root = Widget()
>>> button = Button()
>>> root.add_widget(button)
>>> root.remove_widget(button)
```

**on\_slide\_progress(self, \*args)**

This event is deployed every available frame while the tab is scrolling.

**on\_carousel\_index(self, instance\_tabs\_carousel, index: int)**

Called when the Tab index have changed.

This event is deployed by the built in carousel of the class.

**on\_ref\_press(self, \*args)**

This event will be launched every time the user press a markup enabled label with a link or reference inside.

**on\_tab\_switch(self, \*args)**

This event is launched every time the current tab is changed.

**on\_size(self, instance\_tab, size: list)**


Called when the application screen is resized.

### 2.3.41 Snackbar

#### See also:

[Material Design spec, Snackbars](#)

**Snackbars provide brief messages about app processes at the bottom of the screen.**

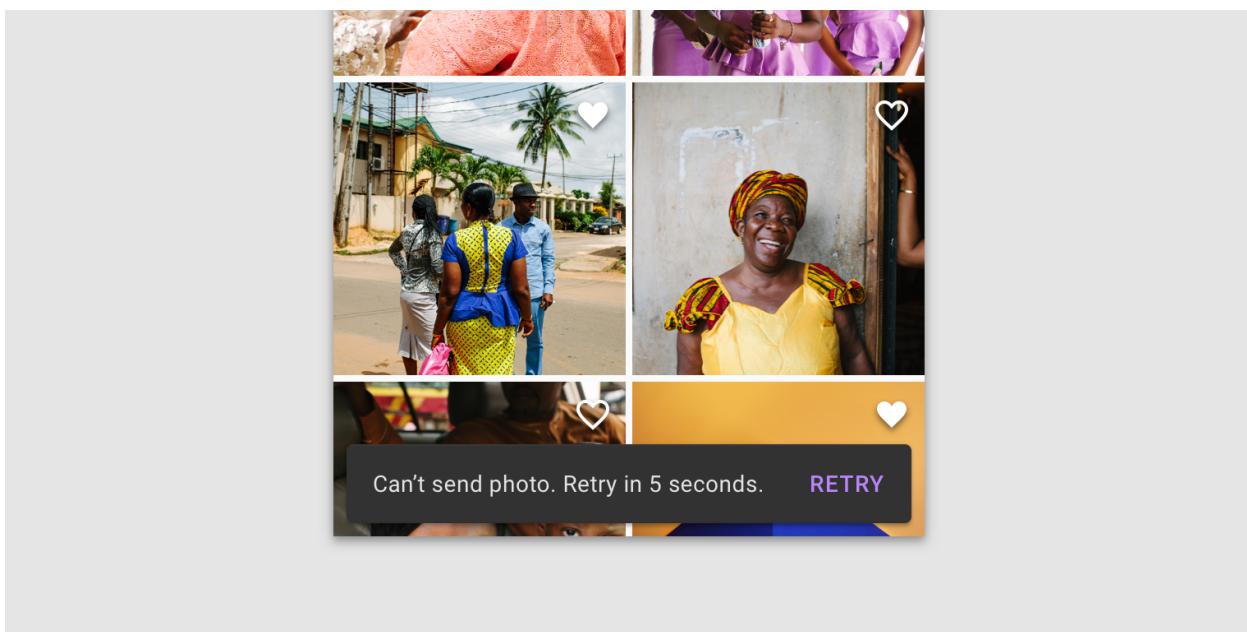

## Usage

```
from kivy.lang import Builder

from kivymd.app import MDApp

KV = '''
#:import Snackbar kivymd.uix.snackbar.Snackbar

MDScreen:

    MDRaisedButton:
        text: "Create simple snackbar"
        on_release: Snackbar(text="This is a snackbar!").open()
        pos_hint: {"center_x": .5, "center_y": .5}
    '''

class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

Test().run()
```

## Usage with snackbar\_x, snackbar\_y

```
Snackbar(
    text="This is a snackbar!",
    snackbar_x="10dp",
    snackbar_y="10dp",
    size_hint_x=(
        Window.width - (dp(10) * 2)
    ) / Window.width
).open()
```

## Control width


```
Snackbar(
    text="This is a snackbar!",
    snackbar_x="10dp",
    snackbar_y="10dp",
    size_hint_x=.5
).open()
```



This is a Snackbar!

### Custom text color

```
Snackbar(
    text="[color=#ddbb34]This is a Snackbar![/color]",
    snackbar_y="10dp",
    snackbar_y="10dp",
    size_hint_x=.7
).open()
```

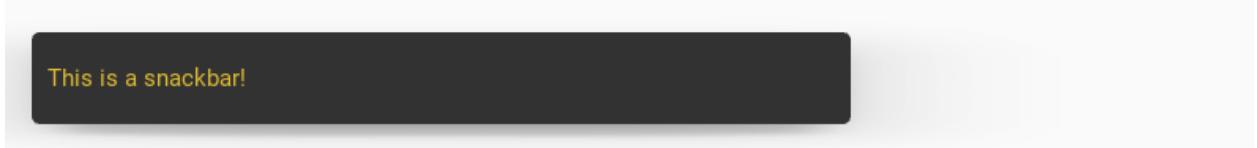

This is a Snackbar!

### Usage with button

```
snackbar = Snackbar(
    text="This is a Snackbar!",
    snackbar_x="10dp",
    snackbar_y="10dp",
)
snackbar.size_hint_x = (
    Window.width - (snackbar.snackbar_x * 2)
) / Window.width
snackbar.buttons = [
    MDFlatButton(
        text="UPDATE",
        text_color=(1, 1, 1, 1),
        on_release=snackbar.dismiss,
    ),
    MDFlatButton(
        text="CANCEL",
        text_color=(1, 1, 1, 1),
        on_release=snackbar.dismiss,
    ),
]
snackbar.open()
```



This is a Snackbar!

UPDATE CANCEL

### Using a button with custom color

```
Snackbar(  
    ...  
    bg_color=(0, 0, 1, 1),  
).open()
```



### Custom usage

```
from kivy.lang import Builder  
from kivy.animation import Animation  
from kivy.clock import Clock  
from kivy.metrics import dp  
  
from kivymd.app import MDApp  
from kivymd.uix.snackbar import Snackbar  
  
KV = ''''  
MDScreen:  
  
    MDFloatingActionButton:  
        id: button  
        x: root.width - self.width - dp(10)  
        y: dp(10)  
        on_release: app.snackbar_show()  
...  
  
class Test(MDApp):  
    def __init__(self, **kwargs):  
        super().__init__(**kwargs)  
        self.screen = Builder.load_string(KV)  
        self.snackbar = None  
        self._interval = 0  
  
    def build(self):  
        return self.screen  
  
    def wait_interval(self, interval):  
        self._interval += interval  
        if self._interval > self.snackbar.duration + 0.5:  
            anim = Animation(y=dp(10), d=.2)  
            anim.start(self.screen.ids.button)  
            Clock.unschedule(self.wait_interval)
```

(continues on next page)

(continued from previous page)

```

        self._interval = 0
        self.snackbar = None

    def snackbar_show(self):
        if not self.snackbar:
            self.snackbar = Snackbar(text="This is a snackbar!")
            self.snackbar.open()
        anim = Animation(y=dp(72), d=.2)
        anim.bind(on_complete=lambda *args: Clock.schedule_interval(
            self.wait_interval, 0))
        anim.start(self.screen.ids.button)

Test().run()

```

## Custom Snackbar

```

from kivy.lang import Builder
from kivy.core.window import Window
from kivy.properties import StringProperty, NumericProperty

from kivymd.app import MDApp
from kivymd.uix.button import MDFlatButton
from kivymd.uix.snackbar import BaseSnackbar

KV = '''
<CustomSnackbar>

MDIconButton:
    pos_hint: {'center_y': .5}
    icon: root.icon
    opposite_colors: True

MDLabel:
    id: text_bar
    size_hint_y: None
    height: self.texture_size[1]
    text: root.text
    font_size: root.font_size
    theme_text_color: 'Custom'
    text_color: 'ffffff'
    shorten: True
    shorten_from: 'right'
    pos_hint: {'center_y': .5}

MDScreen:

MDRaisedButton:

```

(continues on next page)

(continued from previous page)

```

        text: "SHOW"
        pos_hint: {"center_x": .5, "center_y": .45}
        on_press: app.show()
    ...


class CustomSnackbar(BaseSnackbar):
    text = StringProperty(None)
    icon = StringProperty(None)
    font_size = NumericProperty("15sp")

class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

    def show(self):
        snackbar = CustomSnackbar(
            text="This is a Snackbar!",
            icon="information",
            snackbar_x="10dp",
            snackbar_y="10dp",
            buttons=[MDFlatButton(text="ACTION", text_color=(1, 1, 1, 1))])
        snackbar.size_hint_x = (
            Window.width - (snackbar.snackbar_x * 2))
        ) / Window.width
        snackbar.open()

Test().run()

```

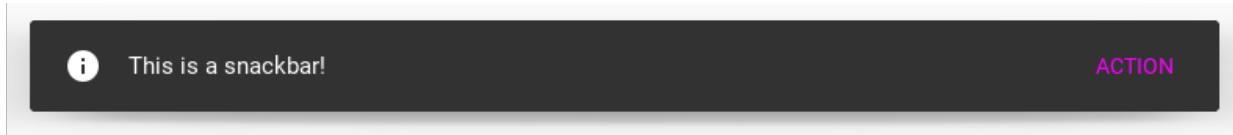

## API - kivymd.uix.snackbar.snackbar

```
class kivymd.uix.snackbar.snackbar.BaseSnackbar(**kwargs)
```

### Events

#### `on_open`

Called when a dialog is opened.

#### `on_dismiss`

When the front layer rises.

Abstract base class for all Snackbars. This class handles sizing, positioning, shape and events for Snackbars

All Snackbars will be made off of this *BaseSnackbar*.

*BaseSnackbar* will always try to fill the remainder of the screen with your Snackbar.

To make your Snackbar dynamic and symmetric with snackbar\_x.

Set size\_hint\_x like below:

```
size_hint_z = (
    Window.width - (snackbar_x * 2)
) / Window.width
```

#### **duration**

The amount of time that the snackbar will stay on screen for.

*duration* is a [NumericProperty](#) and defaults to *3*.

#### **auto\_dismiss**

Whether to use automatic closing of the snackbar or not.

*auto\_dismiss* is a [BooleanProperty](#) and defaults to '*True*'.

#### **bg\_color**

Snackbar background color in (r, g, b, a) or string format.

*bg\_color* is a [ColorProperty](#) and defaults to *None*.

#### **buttons**

Snackbar buttons.

*buttons* is a [ListProperty](#) and defaults to *[]*

#### **radius**

Snackbar radius.

*radius* is a [ListProperty](#) and defaults to *[5, 5, 5, 5]*

#### **snackbar\_animation\_dir**

Snackbar animation direction.

Available options are: "Top", "Bottom", "Left", "Right"

*snackbar\_animation\_dir* is an [OptionProperty](#) and defaults to '*Bottom*'.

#### **snackbar\_x**

The snackbar x position in the screen

*snackbar\_x* is a [NumericProperty](#) and defaults to *0dp*.

#### **snackbar\_y**

The snackbar x position in the screen

*snackbar\_y* is a [NumericProperty](#) and defaults to *0dp*.

#### **dismiss(self, \*args)**

Dismiss the snackbar.

#### **open(self)**

Show the snackbar.

#### **on\_open(self, \*args)**

Called when a dialog is opened.

#### **on\_dismiss(self, \*args)**

Called when the dialog is closed.

```
on_buttons(self, instance, value)

class kivymd.uix.snackbar.Snackbar(**kwargs)
    Snackbar inherits all its functionality from BaseSnackbar

    text
        The text that will appear in the snackbar.
        text is a StringProperty and defaults to ''.

    font_size
        The font size of the text that will appear in the snackbar.
        font_size is a NumericProperty and defaults to '15sp'.
```

### 2.3.42 FitImage

Feature to automatically crop a Kivy image to fit your layout Write by Benedikt Zwölfer

Referene - <https://gist.github.com/benni12er/95a45eb168fc33a4fc2d545af692dad>

#### Example:

Declarative KV styles


```
MDBoxLayout:
    size_hint_y: None
    height: "200dp"
    orientation: 'vertical'

    FitImage:
        size_hint_y: 3
        source: 'images/img1.jpg'

    FitImage:
        size_hint_y: 1
        source: 'images/img2.jpg'
```

Declarative python styles

```
MDBoxLayout(
    FitImage(
        size_hint_y=.3,
        source='images/img1.jpg',
    ),
    FitImage(
        size_hint_y=.7,
        source='images/img2.jpg',
    ),
    size_hint_y=None,
    height="200dp",
    orientation='vertical',
)
```

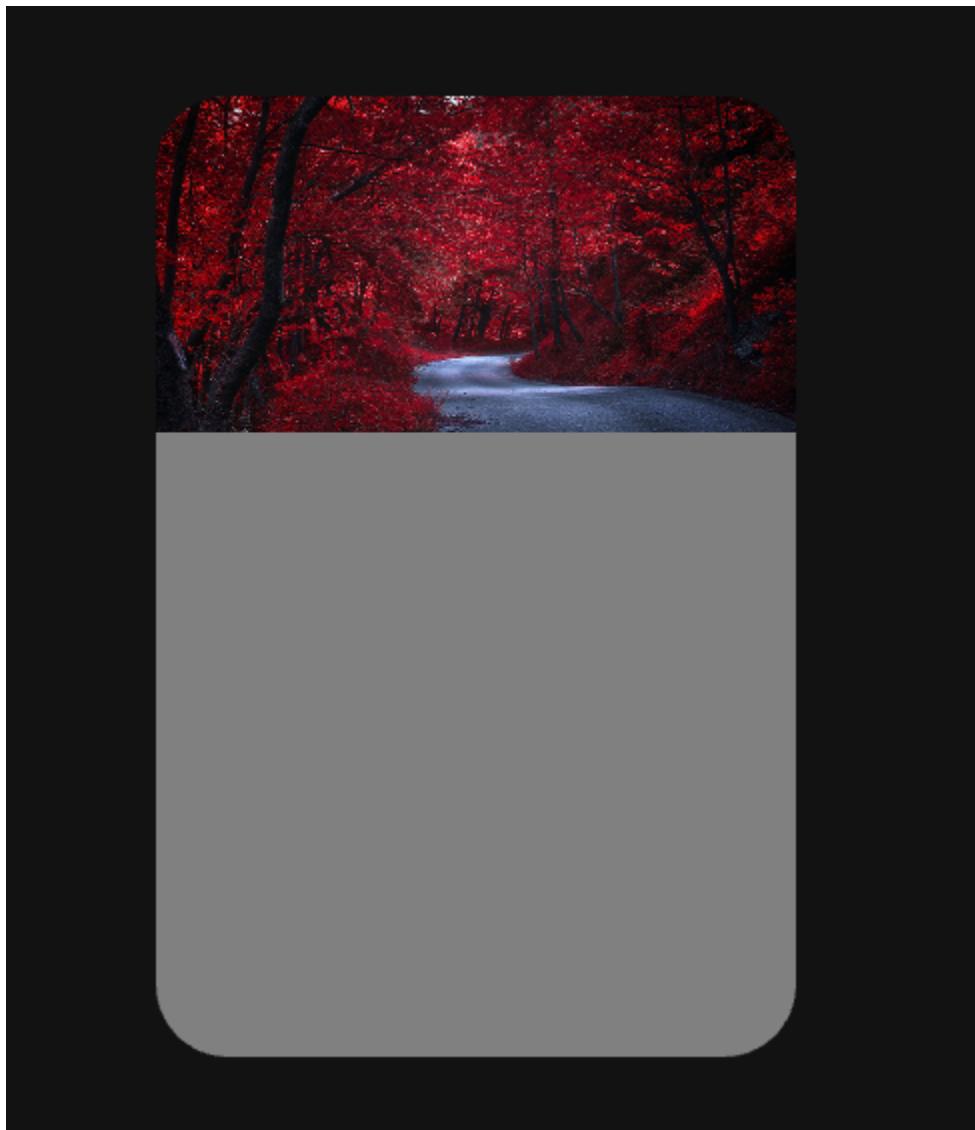**Example with round corners:**

Declarative KV styles

```
from kivy.lang import Builder

from kivymd.app import MDApp

KV = '''
MDScreen:

    MDCard:
        radius: 36
        md_bg_color: "grey"
        pos_hint: {"center_x": .5, "center_y": .5}
        size_hint: .4, .8
```

(continues on next page)

(continued from previous page)

```

FitImage:
    source: "bg.jpg"
    size_hint_y: .35
    pos_hint: {"top": 1}
    radius: 36, 36, 0, 0
...
```
class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        return Builder.load_string(KV)

Example().run()

```

Declarative python styles

```

from kivymd.app import MDApp
from kivymd.uix.card import MDCard
from kivymd.uix.fitimage import FitImage
from kivymd.uix.screen import MDScreen


class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        return (
            MDScreen(
                MDCard(
                    FitImage(
                        source="bg.jpg",
                        size_hint_y=0.35,
                        pos_hint={"top": 1},
                        radius=(36, 36, 0, 0),
                    ),
                    radius=36,
                    md_bg_color="grey",
                    pos_hint={"center_x": .5, "center_y": .5},
                    size_hint=(0.4, 0.8),
                ),
            )
        )

Example().run()

```

**API - kivymd.uix.fitimage.fitimage**

```
class kivymd.uix.fitimage.FitImage(**kwargs)
```

Box layout class.

For more information, see in the [BoxLayout](#) class documentation.

**source**

Filename/source of your image.

`source` is a [StringProperty](#) and defaults to None.

**mipmap**

Indicate if you want OpenGL mipmaping to be applied to the texture. Read [Mipmapping](#) for more information.

New in version 1.0.0.

`mipmap` is a [BooleanProperty](#) and defaults to *False*.


**reload(self)**

### 2.3.43 NavigationDrawer

**See also:**

[Material Design 2 spec, Navigation drawer](#) and [Material Design 3 spec, Navigation drawer](#)

**Navigation drawers provide access to destinations in your app.**

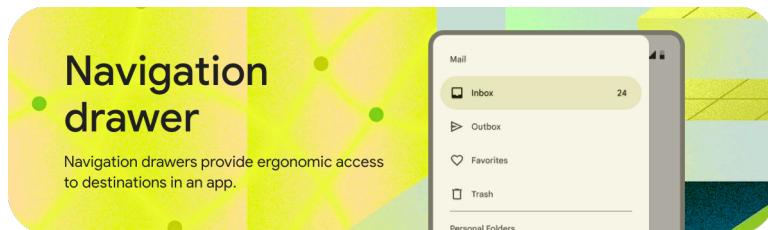

When using the class `MDNavigationDrawer` skeleton of your KV markup should look like this:

#### Anatomy

Root:

MDNavigationLayout:

MDScreenManager:

Screen\_1:

Screen\_2:

(continues on next page)

(continued from previous page)

**MDNavigationDrawer:**

```
# This custom rule should implement what will appear in your  
# MDNavigationDrawer.
```

**ContentNavigationDrawer:**

## A simple example

Declarative KV styles

```
from kivy.lang import Builder

from kivymd.uix.boxlayout import MDBBoxLayout
from kivymd.app import MDApp

KV = '''
MDScreen:

    MDNavigationLayout:

        MDScreenManager:

            MDScreen:

                MDTopAppBar:
                    title: "Navigation Drawer"
                    elevation: 4
                    pos_hint: {"top": 1}
                    md_bg_color: "#e7e4c0"
                    specific_text_color: "#4a4939"
                    left_action_items:
                        [['menu', lambda x: nav_drawer.set_state("open")]]


            MDNavigationDrawer:
                id: nav_drawer
                radius: (0, 16, 16, 0)

            ContentNavigationDrawer:
        ...

class ContentNavigationDrawer(MDBBoxLayout):
    pass

class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        return Builder.load_string(KV)
```

(continues on next page)

(continued from previous page)

```
Example().run()
```

Declarative python styles

```
from kivymd.app import MDApp
from kivymd.uix.boxlayout import MDBBoxLayout
from kivymd.uix.navigationdrawer import MDNavigationLayout, MDNavigationDrawer
from kivymd.uix.screen import MDScreen
from kivymd.uix.screenmanager import MDScreenManager
from kivymd.uix.toolbar import MDTopAppBar


class ContentNavigationDrawer(MDBBoxLayout):
    pass


class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        return(
            MDScreen(
                MDNavigationLayout(
                    MDScreenManager(
                        MDScreen(
                            MDTopAppBar(
                                title="Navigation Drawer",
                                elevation=4,
                                pos_hint={"top": 1},
                                md_bg_color="#e7e4c0",
                                specific_text_color="#4a4939",
                                left_action_items=[
                                    ['menu', lambda x: self.nav_drawer_open()],
                                ],
                            )
                        )
                    ),
                    MDNavigationDrawer(
                        ContentNavigationDrawer(),
                        id="nav_drawer",
                        radius=(0, 16, 16, 0),
                    ),
                ),
            ),
            def nav_drawer_open(self, *args):
                nav_drawer = self.root.children[0].ids.nav_drawer
                nav_drawer.set_state("open")
```

(continues on next page)

(continued from previous page)

Example().run()

---

**Note:** `MDNavigationDrawer` is an empty MDCard panel.

---

### Standard content for the navigation bar

Declarative KV styles

```
from kivy.lang import Builder

from kivymd.app import MDApp

KV = '''
<DrawerClickableItem@MDNavigationDrawerItem>
    focus_color: "#e7e4c0"
    text_color: "#4a4939"
    icon_color: "#4a4939"
    ripple_color: "#c5bdd2"
    selected_color: "#0c6c4d"

<DrawerLabelItem@MDNavigationDrawerItem>
    text_color: "#4a4939"
    icon_color: "#4a4939"
    focus_behavior: False
    selected_color: "#4a4939"
    _no_ripple_effect: True

MDScreen:

    MDNavigationLayout:

        MDScreenManager:

            MDScreen:

                MDTopAppBar:
                    title: "Navigation Drawer"
                    elevation: 4
                    pos_hint: {"top": 1}
                    md_bg_color: "#e7e4c0"
                    specific_text_color: "#4a4939"
                    left_action_items: [["menu", lambda x: nav_drawer.set_state("open")]]


                MDNavigationDrawer:
                    id: nav_drawer
'''
```

(continues on next page)

(continued from previous page)

```

radius: (0, 16, 16, 0)

MDNavigationDrawerMenu:

    MDNavigationDrawerHeader:
        title: "Header title"
        title_color: "#4a4939"
        text: "Header text"
        spacing: "4dp"
        padding: "12dp", 0, 0, "56dp"

    MDNavigationDrawerLabel:
        text: "Mail"

    DrawerClickableItem:
        icon: "gmail"
        right_text: "+99"
        text_right_color: "#4a4939"
        text: "Inbox"

    DrawerClickableItem:
        icon: "send"
        text: "Outbox"

    MDNavigationDrawerDivider:

    MDNavigationDrawerLabel:
        text: "Labels"

    DrawerLabelItem:
        icon: "information-outline"
        text: "Label"

    DrawerLabelItem:
        icon: "information-outline"
        text: "Label"
    ...
}

class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        return Builder.load_string(KV)

Example().run()

```

Declarative python styles

```

from kivymd.app import MDApp
from kivymd.uix.navigationdrawer import (
    MDNavigationLayout,

```

(continues on next page)

(continued from previous page)

```

MDNavigationDrawer,
MDNavigationDrawerMenu,
MDNavigationDrawerHeader,
MDNavigationDrawerLabel,
MDNavigationDrawerDivider,
MDNavigationDrawerItem,
)
from kivymd.uix.screen import MDScreen
from kivymd.uix.screenmanager import MDScreenManager
from kivymd.uix.toolbar import MDTopAppBar


class BaseNavigationDrawerItem(MDNavigationDrawerItem):
    def __init__(self, **kwargs):
        super().__init__(**kwargs)
        self.radius = 24
        self.text_color = "#4a4939"
        self.icon_color = "#4a4939"
        self.focus_color = "#e7e4c0"


class DrawerLabelItem(BaseNavigationDrawerItem):
    def __init__(self, **kwargs):
        super().__init__(**kwargs)
        self.focus_behavior = False
        self._no_ripple_effect = True
        self.selected_color = "#4a4939"


class DrawerClickableItem(BaseNavigationDrawerItem):
    def __init__(self, **kwargs):
        super().__init__(**kwargs)
        self.ripple_color = "#c5bdd2"
        self.selected_color = "#0c6c4d"


class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        return(
            MDScreen(
                MDNavigationLayout(
                    MDScreenManager(
                        MDScreen(
                            MDTopAppBar(
                                title="Navigation Drawer",
                                elevation=4,
                                pos_hint={"top": 1},
                                md_bg_color="#e7e4c0",
                                specific_text_color="#4a4939",
                                left_action_items=[
                                    ['menu', lambda x: self.nav_drawer_open()]

```

(continues on next page)

(continued from previous page)

```

        ],
    )

),
MDNavigationDrawer(
    MDNavigationDrawerMenu(
        MDNavigationDrawerHeader(
            title="Header title",
            title_color="#4a4939",
            text="Header text",
            spacing="4dp",
            padding=("12dp", 0, 0, "56dp"),
        ),
        MDNavigationDrawerLabel(
            text="Mail",
        ),
        DrawerClickableItem(
            icon="gmail",
            right_text="+99",
            text_right_color="#4a4939",
            text="Inbox",
        ),
        DrawerClickableItem(
            icon="send",
            text="Outbox",
        ),
        MDNavigationDrawerDivider(),
        MDNavigationDrawerLabel(
            text="Labels",
        ),
        DrawerLabelItem(
            icon="information-outline",
            text="Label",
        ),
        DrawerLabelItem(
            icon="information-outline",
            text="Label",
        ),
    ),
    id="nav_drawer",
    radius=(0, 16, 16, 0),
)
)
)
)

def nav_drawer_open(self, *args):
    nav_drawer = self.root.children[0].ids.nav_drawer
    nav_drawer.set_state("open")

```

(continues on next page)

(continued from previous page)

|                 |
|-----------------|
| Example().run() |
|-----------------|

## Switching screens in the ScreenManager and using the common MDTopAppBar

Declarative KV styles

```
from kivy.lang import Builder
from kivy.properties import ObjectProperty

from kivymd.app import MDApp
from kivymd.uix.scrollview import MDScrollView

KV = '''
<ContentNavigationDrawer>

MDList:

    OneLineListItem:
        text: "Screen 1"
        on_press:
            root.nav_drawer.set_state("close")
            root.screen_manager.current = "scr 1"

    OneLineListItem:
        text: "Screen 2"
        on_press:
            root.nav_drawer.set_state("close")
            root.screen_manager.current = "scr 2"

MDScreen:

    MDTopAppBar:
        pos_hint: {"top": 1}
        elevation: 4
        title: "MDNavigationDrawer"
        left_action_items: [["menu", lambda x: nav_drawer.set_state("open")]]


    MDNavigationLayout:

        MDScreenManager:
            id: screen_manager

            MDScreen:
                name: "scr 1"

                MDLabel:
                    text: "Screen 1"
                    halign: "center"
```

(continues on next page)

(continued from previous page)

```

MDScreen:
    name: "scr 2"

    MDLabel:
        text: "Screen 2"
        halign: "center"

MDNavigationDrawer:
    id: nav_drawer
    radius: (0, 16, 16, 0)

    ContentNavigationDrawer:
        screen_manager: screen_manager
        nav_drawer: nav_drawer
    ...

class ContentNavigationDrawer(MDScrollView):
    screen_manager = ObjectProperty()
    nav_drawer = ObjectProperty()

class Example(MDApp):
    def build(self):
        self.theme_cls.primary_palette = "Orange"
        self.theme_cls.theme_style = "Dark"
        return Builder.load_string(KV)

Example().run()

```

Declarative python styles

```

from kivymd.app import MDApp
from kivymd.uix.label import MDLabel
from kivymd.uix.list import MDList, OneLineListItem
from kivymd.uix.navigationdrawer import MDNavigationLayout, MDNavigationDrawer
from kivymd.uix.screen import MDScreen
from kivymd.uix.screenmanager import MDScreenManager
from kivymd.uix.scrollview import MDScrollView
from kivymd.uix.toolbar import MDTopAppBar

class Example(MDApp):
    def build(self):
        self.theme_cls.primary_palette = "Orange"
        self.theme_cls.theme_style = "Dark"
        return (
            MDScreen(
                MDTopAppBar(
                    pos_hint={"top": 1},

```

(continues on next page)

(continued from previous page)

```

        elevation=4,
        title="MDNavigationDrawer",
        left_action_items=[["menu", lambda x: self.nav_drawer_open()]],
    ),
    MDNavigationLayout(
        MDScreenManager(
            MDScreen(
                MDLabel(
                    text="Screen 1",
                    halign="center",
                ),
                name="scr 1",
            ),
            MDScreen(
                MDLabel(
                    text="Screen 2",
                    halign="center",
                ),
                name="scr 2",
            ),
            id="screen_manager",
        ),
        MDNavigationDrawer(
            MDScrollView(
                MDList(
                    OneLineListItem(
                        text="Screen 1",
                        on_press=self.switch_screen,
                    ),
                    OneLineListItem(
                        text="Screen 2",
                        on_press=self.switch_screen,
                    ),
                ),
            ),
            id="nav_drawer",
            radius=(0, 16, 16, 0),
        ),
        id="navigation_layout",
    )
)

def switch_screen(self, instance_list_item: OneLineListItem):
    self.root.ids.navigation_layout.ids.screen_manager.current = {
        "Screen 1": "scr 1", "Screen 2": "scr 2"
    }[instance_list_item.text]
    self.root.children[0].ids.nav_drawer.set_state("close")

def nav_drawer_open(self):
    nav_drawer = self.root.children[0].ids.nav_drawer
    nav_drawer.set_state("open")

```

(continues on next page)

(continued from previous page)

```
Example().run()
```

### API - kivymd.uix.navigationdrawer.navigationdrawer

```
class kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationLayout(*args, **kwargs)
```

For more information, see in the [MDFloatLayout](#) class documentation.

```
update_pos(self, instance_navigation_drawer, pos_x: float)
```

```
add_scriim(self, instance_manager: ScreenManager)
```

```
update_scriim_rectangle(self, instance_manager: ScreenManager, size: list)
```

```
add_widget(self, widget, index=0, canvas=None)
```

Only two layouts are allowed: [ScreenManager](#) and [MDNavigationDrawer](#).

```
class kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationDrawerLabel(*args, **kwargs)
```

Implements a label for a menu for [MDNavigationDrawer](#) class.

For more information, see in the [MDBBoxLayout](#) class documentation.

New in version 1.0.0.

```
MDNavigationDrawer:
```

```
    MDNavigationDrawerMenu:
```

```
        MDNavigationDrawerLabel:
```

```
            text: "Mail"
```



### **text**

Text label.

`text` is a [StringProperty](#) and defaults to “”.

### **padding**

Padding between layout box and children: [padding\_left, padding\_top, padding\_right, padding\_bottom].

Padding also accepts a two argument form [padding\_horizontal, padding\_vertical] and a one argument form [padding].

`padding` is a [VariableListProperty](#) and defaults to [`'20dp'`, 0, 0, `'8dp'`].

```
class kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationDrawerDivider(*args,  
                           **kwargs)
```

Implements a divider for a menu for [MDNavigationDrawer](#) class.

For more information, see in the [MDBBoxLayout](#) class documentation.

New in version 1.0.0.

[\*\*MDNavigationDrawer\*\*:](#)

[\*\*MDNavigationDrawerMenu\*\*:](#)

[\*\*MDNavigationDrawerLabel\*\*:](#)  
`text: "Mail"`

(continues on next page)

(continued from previous page)

**MDNavigationDrawerDivider:****padding**

Padding between layout box and children: [padding\_left, padding\_top, padding\_right, padding\_bottom].

Padding also accepts a two argument form [padding\_horizontal, padding\_vertical] and a one argument form [padding].

*padding* is a [VariableListProperty](#) and defaults to ['20dp', '12dp', 0, '12dp'].

**color**

Divider color in (r, g, b, a) or string format.

*color* is a [ColorProperty](#) and defaults to *None*.

**class** `kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationDrawerHeader(**kwargs)`

Implements a header for a menu for [MDNavigationDrawer](#) class.

For more information, see in the [MDBoxLayout](#) class documentation.

New in version 1.0.0.

**MDNavigationDrawer:****MDNavigationDrawerMenu:**

(continues on next page)

(continued from previous page)

```
MDNavigationDrawerHeader:  
    title: "Header title"  
    text: "Header text"  
    spacing: "4dp"  
    padding: "12dp", 0, 0, "56dp"
```


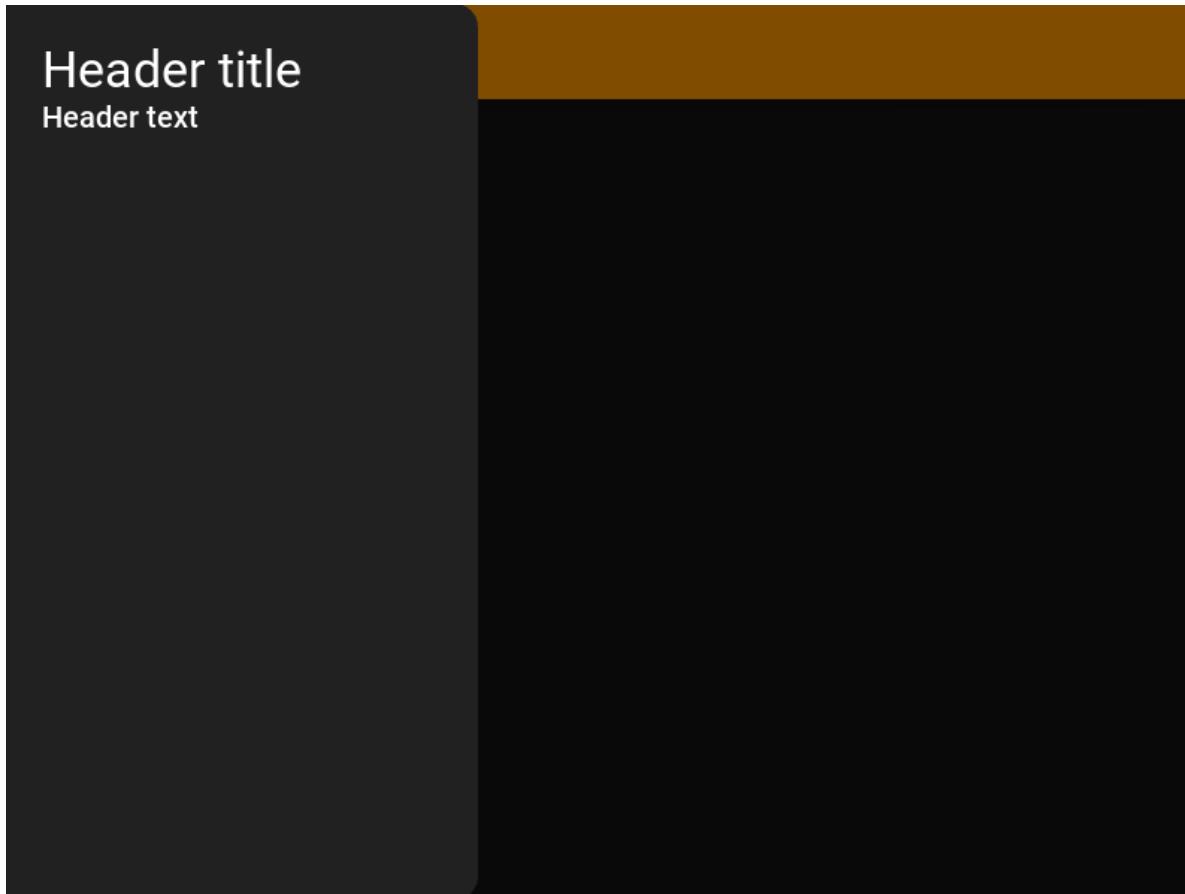
**source**

Image logo path.

```
MDNavigationDrawer:  
  
    MDNavigationDrawerMenu:  
  
        MDNavigationDrawerHeader:  
            title: "Header title"  
            text: "Header text"  
            source: "logo.png"  
            spacing: "4dp"  
            padding: "12dp", 0, 0, "56dp"
```

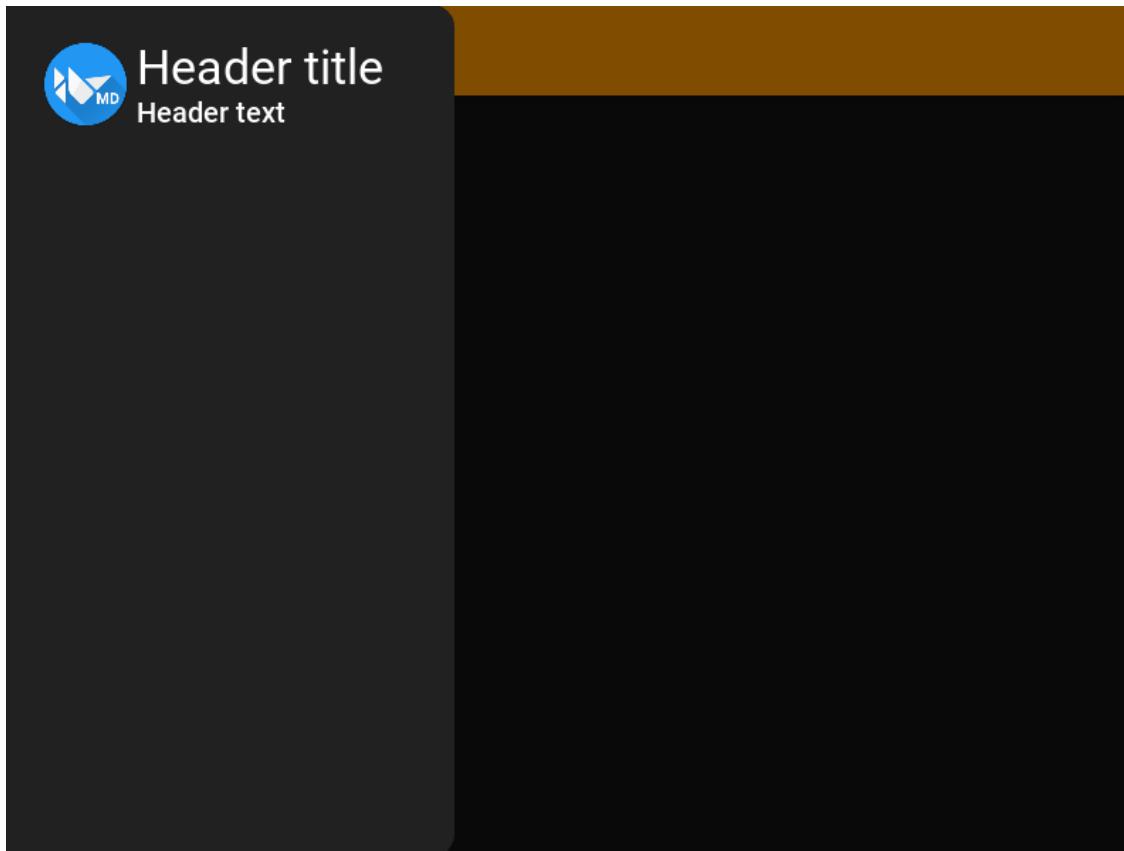

`source` is a `StringProperty` and defaults to ''.

#### **title**

Title shown in the first line.

`title` is a `StringProperty` and defaults to ''.

#### **title\_halign**

Title halign first line.

`title_halign` is a `StringProperty` and defaults to 'left'.

#### **title\_color**

Title text color in (r, g, b, a) or string format.

`title_color` is a `ColorProperty` and defaults to *None*.

#### **title\_font\_style**

Title shown in the first line.

`title_font_style` is a `StringProperty` and defaults to 'H4'.

#### **title\_font\_size**

Title shown in the first line.

`title_font_size` is a `StringProperty` and defaults to '34sp'.

#### **text**

Text shown in the second line.

`text` is a `StringProperty` and defaults to ''.

**text\_halign**

Text halign first line.

`text_halign` is a `StringProperty` and defaults to ‘left’.

**text\_color**

Title text color in (r, g, b, a) or string format.

`text_color` is a `ColorProperty` and defaults to *None*.

**text\_font\_style**

Title shown in the first line.

`text_font_style` is a `StringProperty` and defaults to ‘H6’.

**text\_font\_size**

Title shown in the first line.

`text_font_size` is a `StringProperty` and defaults to ‘20sp’.

**check\_content(self, interval: Union[int, float])**

Removes widgets that the user has not added to the container.

**class kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationDrawerItem(\*args, \*\*kwargs)**

Implements an item for the `MDNavigationDrawer` menu list.

For more information, see in the `OneLineAvatarIconListItem` class documentation.

New in version 1.0.0.

MDNavigationDrawer:


MDNavigationDrawerMenu:

MDNavigationDrawerHeader:

```
title: "Header title"
text: "Header text"
spacing: "4dp"
padding: "12dp", 0, 0, "56dp"
```

MDNavigationDrawerItem

```
icon: "gmail"
right_text: "+99"
text: "Inbox"
```

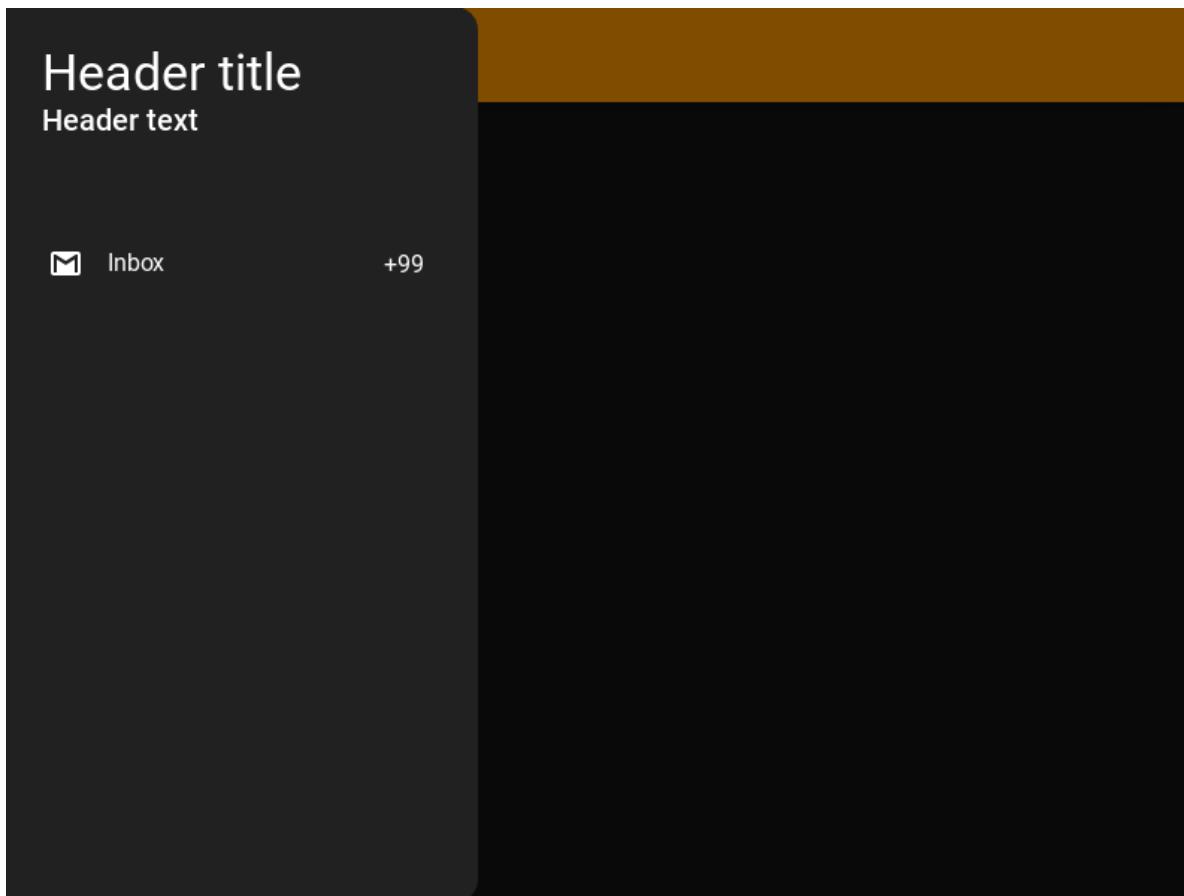**selected**

Is the item selected.

*selected* is a `BooleanProperty` and defaults to *False*.

**icon**

Icon item.

*icon* is a `StringProperty` and defaults to “”.

**icon\_color**

Icon color in (r, g, b, a) or string format item.

*icon\_color* is a `ColorProperty` and defaults to *None*.

**selected\_color**

The color in (r, g, b, a) or string format of the icon and text of the selected item.

*selected\_color* is a `ColorProperty` and defaults to [0, 0, 0, 1].

**right\_text**

Right text item.

*right\_text* is a `StringProperty` and defaults to “”.

**text\_right\_color**

Right text color item in (r, g, b, a) or string format.

*text\_right\_color* is a `ColorProperty` and defaults to *None*.

```
class kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationDrawerMenu(*args, **kwargs)
```

Implements a scrollable list for menu items of the [MDNavigationDrawer](#) class.

For more information, see in the [MDScrollView](#) class documentation.

New in version 1.0.0.

```
MDNavigationDrawer:
```

```
MDNavigationDrawerMenu:
```

```
# Your menu items.
```

```
...
```

### spacing

Spacing between children, in pixels.

*spacing* is a [NumericProperty](#) and defaults to 0.

```
add_widget(self, widget, *args, **kwargs)
```

Add a new widget as a child of this widget.

#### Parameters

**widget: Widget**

Widget to add to our list of children.

**index: int, defaults to 0**

Index to insert the widget in the list. Notice that the default of 0 means the widget is inserted at the beginning of the list and will thus be drawn on top of other sibling widgets. For a full discussion of the index and widget hierarchy, please see the [Widgets Programming Guide](#).

New in version 1.0.5.

**canvas: str, defaults to None**

Canvas to add widget's canvas to. Can be 'before', 'after' or None for the default canvas.

New in version 1.9.0.

```
>>> from kivy.uix.button import Button
>>> from kivy.uix.slider import Slider
>>> root = Widget()
>>> root.add_widget(Button())
>>> slider = Slider()
>>> root.add_widget(slider)
```

```
reset_active_color(self, item: MDNavigationDrawerItem)
```

```
class kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationDrawer(*args, **kwargs)
```

Implements the creation and addition of child widgets as declarative programming style.

### type

Type of drawer. Modal type will be on top of screen. Standard type will be at left or right of screen. Also it automatically disables [close\\_on\\_click](#) and [enable\\_swiping](#) to prevent closing drawer for standard type.

For more information, see in the [MDCard](#) class documentation.

```
MDNavigationDrawer:  
    type: "standard"
```


```
MDNavigationDrawer:  
    type: "modal"
```

`type` is a `OptionProperty` and defaults to '`modal`'.


#### anchor

Anchoring screen edge for drawer. Set it to '`right`' for right-to-left languages. Available options are: '`left`', '`right`'.

```
MDNavigationDrawer:  
    anchor: "left"
```




```
MDNavigationDrawer:  
    anchor: "right"
```

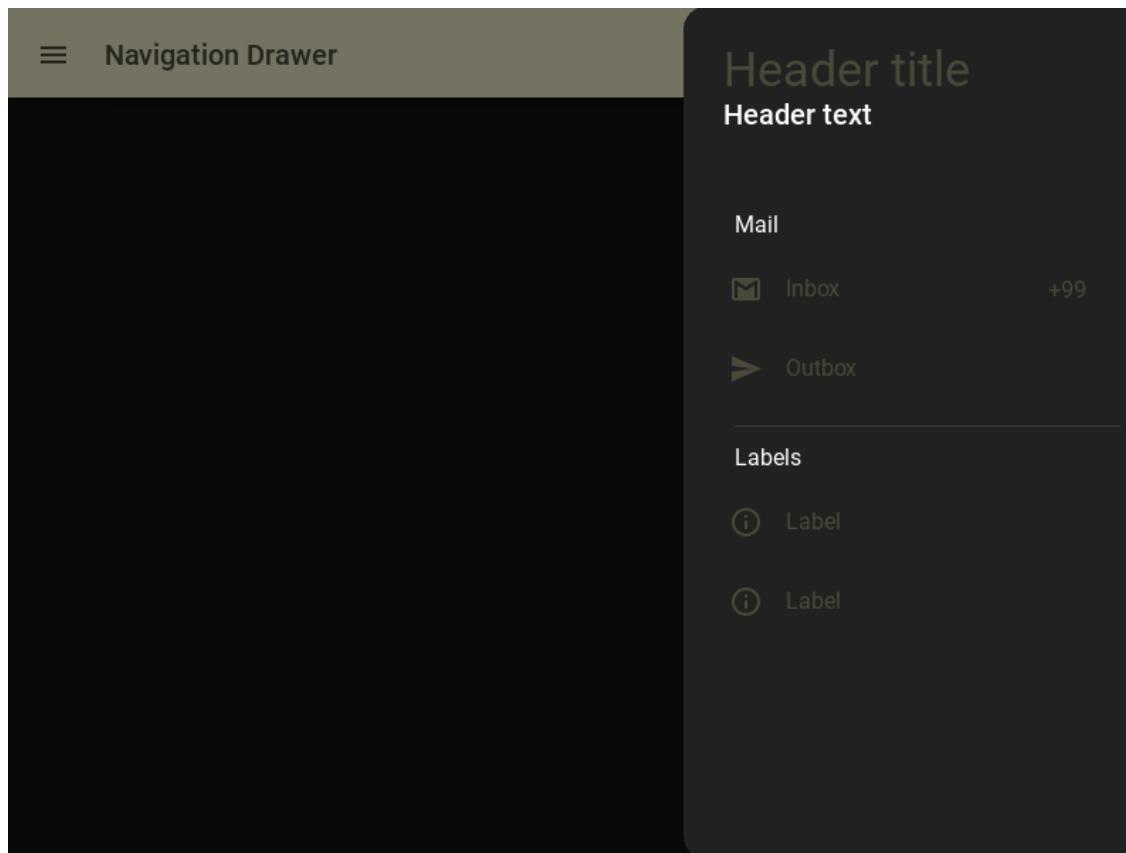

`anchor` is a `OptionProperty` and defaults to '`left`'.

#### `scrim_color`

Color for scrim in (r, g, b, a) or string format. Alpha channel will be multiplied with `_scrim_alpha`. Set fourth channel to 0 if you want to disable scrim.

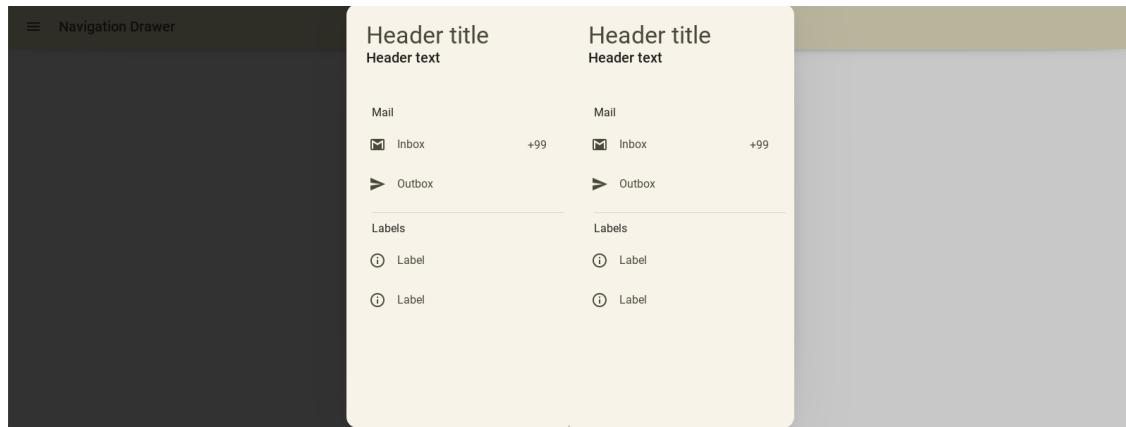

#### `MDNavigationDrawer`:

```
scrim_color: 0, 0, 0, .8  
# scrim_color: 0, 0, 0, .2
```

`scrim_color` is a `ColorProperty` and defaults to [0, 0, 0, 0.5].


#### `padding`

Padding between layout box and children: [padding\_left, padding\_top, padding\_right, padding\_bottom].

Padding also accepts a two argument form [padding\_horizontal, padding\_vertical] and a one argument form [padding].

Changed in version 1.0.0.

```
MDNavigationDrawer:
    padding: 56, 56, 12, 16
```

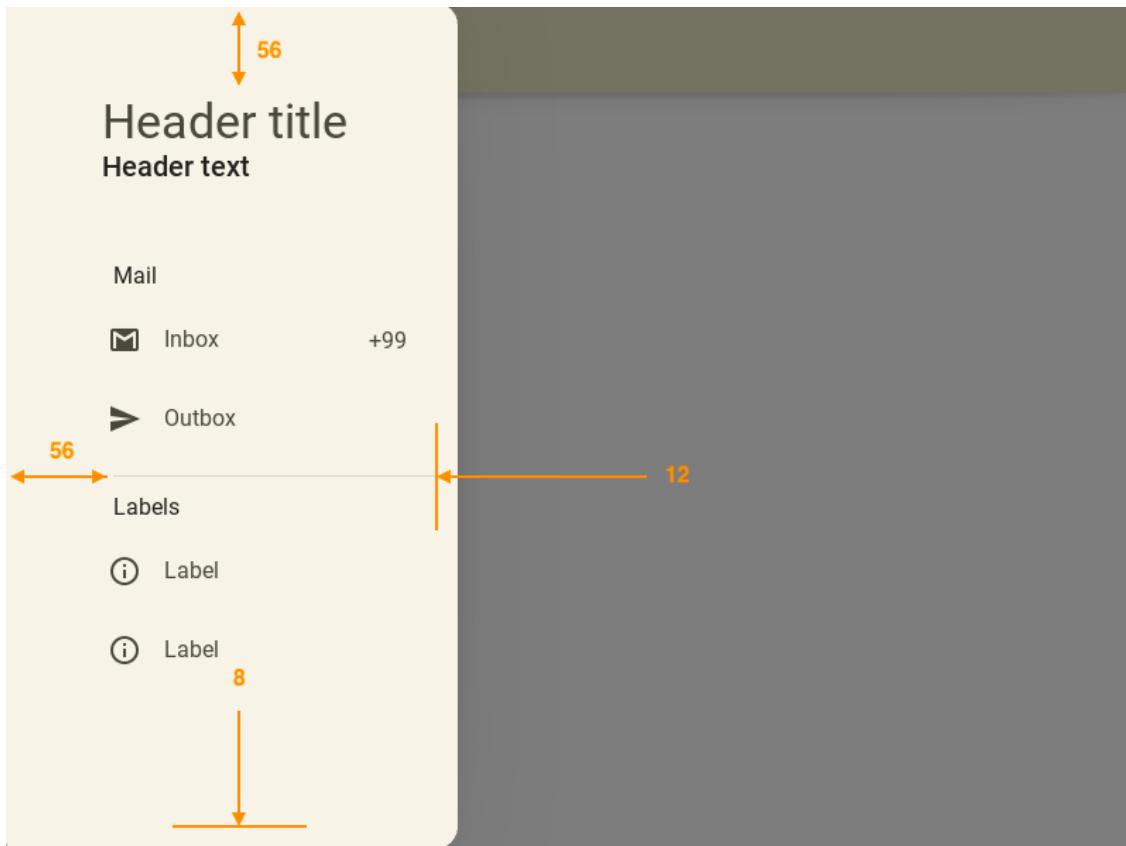

`padding` is a `VariableListProperty` and defaults to '[16, 16, 12, 16]’.

#### **close\_on\_click**

Close when click on scrim or keyboard escape. It automatically sets to False for “standard” type.

`close_on_click` is a `BooleanProperty` and defaults to `True`.

#### **state**

Indicates if panel closed or opened. Sets after `status` change. Available options are: ‘`close`’, ‘`open`’.

`state` is a `OptionProperty` and defaults to ‘`close`’.

#### **status**

Detailed state. Sets before `state`. Bind to `state` instead of `status`. Available options are: ‘`closed`’, ‘`opening_with_swipe`’, ‘`opening_with_animation`’, ‘`opened`’, ‘`closing_with_swipe`’, ‘`closing_with_animation`’.

`status` is a `OptionProperty` and defaults to ‘`closed`’.

#### **open\_progress**

Percent of visible part of side panel. The percent is specified as a floating point number in the range 0-1. 0.0 if panel is closed and 1.0 if panel is opened.

`open_progress` is a `NumericProperty` and defaults to `0.0`.

#### **enable\_swiping**

Allow to open or close navigation drawer with swipe. It automatically sets to False for “standard” type.

`enable_swiping` is a `BooleanProperty` and defaults to `True`.

#### **swipe\_distance**

The distance of the swipe with which the movement of navigation drawer begins.

`swipe_distance` is a `NumericProperty` and defaults to `10`.

#### **swipe\_edge\_width**

The size of the area in px inside which should start swipe to drag navigation drawer.

`swipe_edge_width` is a `NumericProperty` and defaults to `20`.

#### **scrim\_alpha\_transition**

The name of the animation transition type to use for changing `scrim_alpha`.

`scrim_alpha_transition` is a `StringProperty` and defaults to ‘`linear`’.

#### **opening\_transition**

The name of the animation transition type to use when animating to the `state ‘open’`.

`opening_transition` is a `StringProperty` and defaults to ‘`out_cubic`’.

#### **opening\_time**

The time taken for the panel to slide to the `state ‘open’`.

`opening_time` is a `NumericProperty` and defaults to `0.2`.

#### **closing\_transition**

The name of the animation transition type to use when animating to the `state ‘close’`.

`closing_transition` is a `StringProperty` and defaults to ‘`out_sine`’.

#### **closing\_time**

The time taken for the panel to slide to the `state ‘close’`.

`closing_time` is a `NumericProperty` and defaults to `0.2`.

#### **set\_state(self, new\_state='toggle', animation=True)**

Change state of the side panel. New\_state can be one of “`toggle`”, “`open`” or “`close`”.

#### **update\_status(self, \*\_)**

#### **get\_dist\_from\_side(self, x: float)**

#### **on\_touch\_down(self, touch)**

Receive a touch down event.

#### **Parameters**

##### **`touch: MotionEvent class`**

Touch received. The touch is in parent coordinates. See `relativelayout` for a discussion on coordinate systems.

#### **Returns**

`bool` If True, the dispatching of the touch event will stop. If False, the event will continue to be dispatched to the rest of the widget tree.

**on\_touch\_move(self, touch)**

Receive a touch move event. The touch is in parent coordinates.

See [on\\_touch\\_down\(\)](#) for more information.

**on\_touch\_up(self, touch)**

Receive a touch up event. The touch is in parent coordinates.

See [on\\_touch\\_down\(\)](#) for more information.

**on\_radius(self, instance\_navigation\_drawer, radius\_value: list)****on\_type(self, instance\_navigation\_drawer, drawer\_type: str)**

### 2.3.44 TextField

#### See also:

[Material Design spec, Text fields](#)

**Text fields let users enter and edit text.**



KivyMD provides the following field classes for use:

- [MDTextField](#)
- [MDTextFieldRect](#)

---

**Note:** [MDTextField](#) inherited from [TextInput](#). Therefore, most parameters and all events of the [TextInput](#) class are also available in the [MDTextField](#) class.

---

## MDTextField

`MDTextField` can be with helper text and without.

### Without helper text mode

```
MDTextField:  
    hint_text: "No helper text"
```

### Helper text mode on `on_focus` event

```
MDTextField:  
    hint_text: "Helper text on focus"  
    helper_text: "This will disappear when you click off"  
    helper_text_mode: "on_focus"
```

### Persistent helper text mode

```
MDTextField:  
    hint_text: "Persistent helper text"  
    helper_text: "Text is always here"  
    helper_text_mode: "persistent"
```

### Helper text mode '`on_error`'

To display an error in a text field when using the `helper_text_mode: "on_error"` parameter, set the “*error*” text field parameter to *True*:

```
from kivy.lang import Builder  
  
from kivymd.app import MDApp  
  
KV = '''  
MDScreen:  
  
    MDTextField:  
        id: text_field_error  
        hint_text: "Helper text on error (press 'Enter')"  
        helper_text: "There will always be a mistake"  
        helper_text_mode: "on_error"  
        pos_hint: {"center_x": .5, "center_y": .5}  
        size_hint_x: .5
```

(continues on next page)

(continued from previous page)

```
'''  
  
class Test(MDApp):  
    def __init__(self, **kwargs):  
        super().__init__(**kwargs)  
        self.screen = Builder.load_string(KV)  
  
    def build(self):  
        self.theme_cls.theme_style = "Dark"  
        self.theme_cls.primary_palette = "Orange"  
        self.screen.ids.text_field_error.bind(  
            on_text_validate=self.set_error_message,  
            on_focus=self.set_error_message,  
        )  
        return self.screen  
  
    def set_error_message(self, instance_textfield):  
        self.screen.ids.text_field_error.error = True  
  
Test().run()
```

### Helper text mode ‘on\_error’ (with required)

```
MDTextField:  
    hint_text: "required = True"  
    text: "required = True"  
    required: True  
    helper_text_mode: "on_error"  
    helper_text: "Enter text"
```

## Text length control

```
MDTextField:  
    hint_text: "Max text length = 5"  
    max_text_length: 5
```

## Multi line text

```
MDTextField:  
    multiline: True  
    hint_text: "Multi-line text"
```

## Rectangle mode

```
MDTextField:  
    hint_text: "Rectangle mode"  
    mode: "rectangle"
```

## Fill mode

```
MDTextField:  
    hint_text: "Fill mode"  
    mode: "fill"
```

## Round mode

```
MDTextField:  
    hint_text: "Round mode"  
    mode: "round"  
    max_text_length: 15  
    helper_text: "Massage"
```

## MDTextFieldRect

**Note:** `MDTextFieldRect` inherited from `TextInput`. You can use all parameters and attributes of the `TextInput` class in the `MDTextFieldRect` class.

```
MDTextFieldRect:
    size_hint: 1, None
    height: "30dp"
    background_color: app.theme_cls.bg_normal
```

**Warning:** While there is no way to change the color of the border.

## Clickable icon for MDTextField

```
from kivy.lang import Builder
from kivy.properties import StringProperty

from kivymd.app import MDApp
from kivymd.uix.relativelayout import MDRelativeLayout

KV = '''
<ClickableTextFieldRound>:
    size_hint_y: None
    height: text_field.height

    MDTextField:
        id: text_field
        hint_text: root.hint_text
        text: root.text
        password: True
        icon_left: "key-variant"

    MDIconButton:
        icon: "eye-off"
        pos_hint: {"center_y": .5}
        pos: text_field.width - self.width + dp(8), 0
        theme_text_color: "Hint"
        on_release:
            self.icon = "eye" if self.icon == "eye-off" else "eye-off"
            text_field.password = False if text_field.password is True else True

MDScreen:
    ClickableTextFieldRound:
        size_hint_x: None
```

(continues on next page)

(continued from previous page)

```

width: "300dp"
hint_text: "Password"
pos_hint: {"center_x": .5, "center_y": .5}
...
```

```

```

class ClickableTextFieldRound(MDRelativeLayout):
    text = StringProperty()
    hint_text = StringProperty()
    # Here specify the required parameters for MDTextFieldRound:
    # [...]

```

```

class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

Test().run()

```

**See also:**

See more information in the [MDTextFieldRect](#) class.

**API - kivymd.uix.textfield.textfield**

```
class kivymd.uix.textfield.textfield.MDTextFieldRect(**kwargs)
```

TextInput class. See module documentation for more information.

**Events*****on\_text\_validate***

Fired only in multiline=False mode when the user hits ‘enter’. This will also unfocus the textinput.

***on\_double\_tap***

Fired when a double tap happens in the text input. The default behavior selects the text around the cursor position. More info at `on_double_tap()`.

***on\_triple\_tap***

Fired when a triple tap happens in the text input. The default behavior selects the line around the cursor position. More info at `on_triple_tap()`.

***on\_quad\_touch***

Fired when four fingers are touching the text input. The default behavior selects the whole text. More info at `on_quad_touch()`.

**Warning:** When changing a TextInput property that requires re-drawing, e.g. modifying the `text`, the updates occur on the next clock cycle and not instantly. This might cause any changes to the TextInput that occur between the modification and the next cycle to be ignored, or to use previous values. For example, after a update to the `text`, changing the cursor in the same clock frame will move it using the previous text and

will likely end up in an incorrect position. The solution is to schedule any updates to occur on the next clock cycle using `schedule_once()`.

---

**Note:** Selection is cancelled when TextInput is focused. If you need to show selection when TextInput is focused, you should delay (use Clock.schedule) the call to the functions for selecting text (select\_all, select\_text).

---

Changed in version 1.10.0: `background_disabled_active` has been removed.

Changed in version 1.9.0: TextInput now inherits from `FocusBehavior`. `keyboard_mode`, `show_keyboard()`, `hide_keyboard()`, `focus()`, and `input_type` have been removed since they are now inherited from `FocusBehavior`.

Changed in version 1.7.0: `on_double_tap`, `on_triple_tap` and `on_quad_touch` events added.

Changed in version 2.1.0: `keyboard_suggestions` is now inherited from `FocusBehavior`.

### line\_anim

If True, then text field shows animated line when on focus.

`line_anim` is an `BooleanProperty` and defaults to `True`.

`get_rect_instruction(self)`

`get_color_instruction(self)`

`anim_rect(self, points, alpha)`

`class kivymd.uix.textfield.textfield.MDTextField(*args, **kwargs)`

Implements the creation and addition of child widgets as declarative programming style.

### helper\_text

Text for helper\_text mode.

`helper_text` is an `StringProperty` and defaults to “”.

### helper\_text\_mode

Helper text mode. Available options are: ‘`on_error`’, ‘`persistent`’, ‘`on_focus`’.

`helper_text_mode` is an `OptionProperty` and defaults to ‘`none`’.

### max\_text\_length

Maximum allowed value of characters in a text field.

`max_text_length` is an `NumericProperty` and defaults to `None`.

### required

Required text. If True then the text field requires text.

`required` is an `BooleanProperty` and defaults to `False`.

### mode

Text field mode. Available options are: ‘`line`’, ‘`rectangle`’, ‘`fill`’, ‘`round`’.

`mode` is an `OptionProperty` and defaults to ‘`line`’.

### phone\_mask


**validator**

The type of text field for entering Email, time, etc. Automatically sets the type of the text field as “error” if the user input does not match any of the set validation types. Available options are: ‘date’, ‘email’, ‘time’.

When using ‘date’, date\_format must be defined.

New in version 1.1.0.

```
MDTextField:  
    hint_text: "Email"  
    helper_text: "user@gmail.com"  
    validator: "email"
```

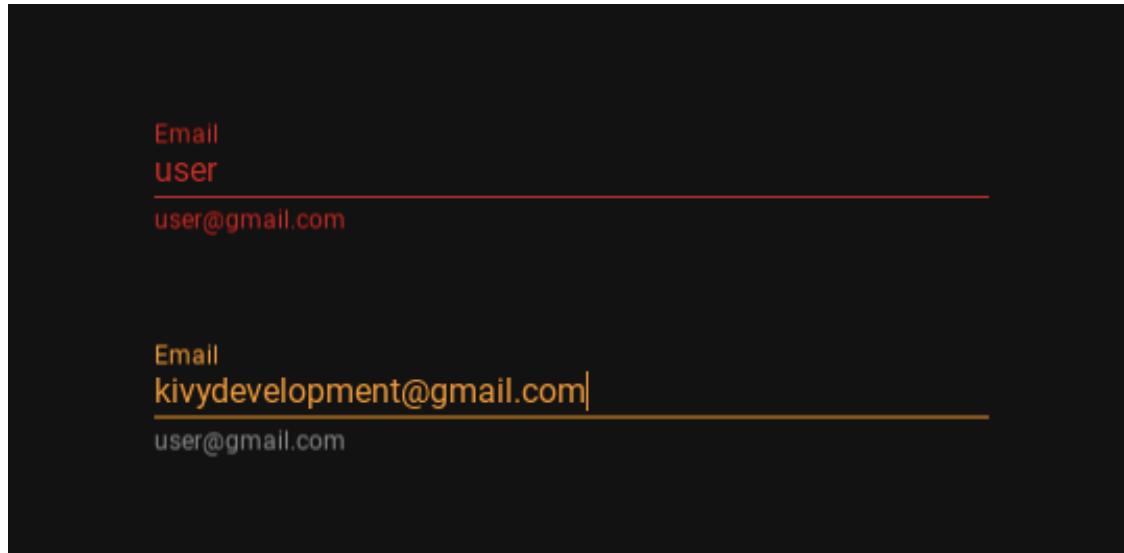

Declarative KV style

```
from kivy.lang import Builder  
  
from kivymd.app import MDApp  
  
KV = '''  
MDScreen:  
  
    MDBBoxLayout:  
        orientation: "vertical"  
        spacing: "20dp"  
        adaptive_height: True  
        size_hint_x: .8  
        pos_hint: {"center_x": .5, "center_y": .5}  
  
        MDTextField:  
            hint_text: "Date dd/mm/yyyy without limits"  
            helper_text: "Enter a valid dd/mm/yyyy date"  
            validator: "date"  
            date_format: "dd/mm/yyyy"  
  
        MDTextField:
```

(continues on next page)

(continued from previous page)

```

        hint_text: "Date mm/dd/yyyy without limits"
        helper_text: "Enter a valid mm/dd/yyyy date"
        validator: "date"
        date_format: "mm/dd/yyyy"

    MDTextField:
        hint_text: "Date yyyy/mm/dd without limits"
        helper_text: "Enter a valid yyyy/mm/dd date"
        validator: "date"
        date_format: "yyyy/mm/dd"

    MDTextField:
        hint_text: "Date dd/mm/yyyy in [01/01/1900, 01/01/2100] interval"
        helper_text: "Enter a valid dd/mm/yyyy date"
        validator: "date"
        date_format: "dd/mm/yyyy"
        date_interval: "01/01/1900", "01/01/2100"

    MDTextField:
        hint_text: "Date dd/mm/yyyy in [01/01/1900, None] interval"
        helper_text: "Enter a valid dd/mm/yyyy date"
        validator: "date"
        date_format: "dd/mm/yyyy"
        date_interval: "01/01/1900", None

    MDTextField:
        hint_text: "Date dd/mm/yyyy in [None, 01/01/2100] interval"
        helper_text: "Enter a valid dd/mm/yyyy date"
        validator: "date"
        date_format: "dd/mm/yyyy"
        date_interval: None, "01/01/2100"
    ...

class Test(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return Builder.load_string(KV)

Test().run()

```

Declarative python style

```

from kivymd.app import MDApp
from kivymd.uix.boxlayout import MDBBoxLayout
from kivymd.uix.screen import MDScreen
from kivymd.uix.textfield import MDTextField

class Test(MDApp):

```

(continues on next page)

(continued from previous page)

```

def build(self):
    self.theme_cls.theme_style = "Dark"
    self.theme_cls.primary_palette = "Orange"
    return (
        MDScreen(
            MDBoxLayout(
                MDTextField(
                    hint_text="Date dd/mm/yyyy without limits",
                    helper_text="Enter a valid dd/mm/yyyy date",
                    validator="date",
                    date_format="dd/mm/yyyy",
                ),
                MDTextField(
                    hint_text="Date mm/dd/yyyy without limits",
                    helper_text="Enter a valid mm/dd/yyyy date",
                    validator="date",
                    date_format="mm/dd/yyyy",
                ),
                MDTextField(
                    hint_text="Date yyyy/mm/dd without limits",
                    helper_text="Enter a valid yyyy/mm/dd date",
                    validator="date",
                    date_format="yyyy/mm/dd",
                ),
                MDTextField(
                    hint_text="Date dd/mm/yyyy in [01/01/1900, 01/01/2100]",
                    helper_text="Enter a valid dd/mm/yyyy date",
                    validator="date",
                    date_format="dd/mm/yyyy",
                    date_interval=["01/01/1900", "01/01/2100"],
                ),
                MDTextField(
                    hint_text="Date dd/mm/yyyy in [01/01/1900, None]",
                    helper_text="Enter a valid dd/mm/yyyy date",
                    validator="date",
                    date_format="dd/mm/yyyy",
                    date_interval=["01/01/1900", None],
                ),
                MDTextField(
                    hint_text="Date dd/mm/yyyy in [None, 01/01/2100]",
                    helper_text="Enter a valid dd/mm/yyyy date",
                    validator="date",
                    date_format="dd/mm/yyyy",
                    date_interval=[None, "01/01/2100"],
                ),
            ),
            orientation="vertical",
            spacing="20dp",
            adaptive_height=True,
            size_hint_x=0.8,
        )
    )

```

(continues on next page)


(continued from previous page)

```

        pos_hint={"center_x": 0.5, "center_y": 0.5},
    )
)
)

Test().run()

```

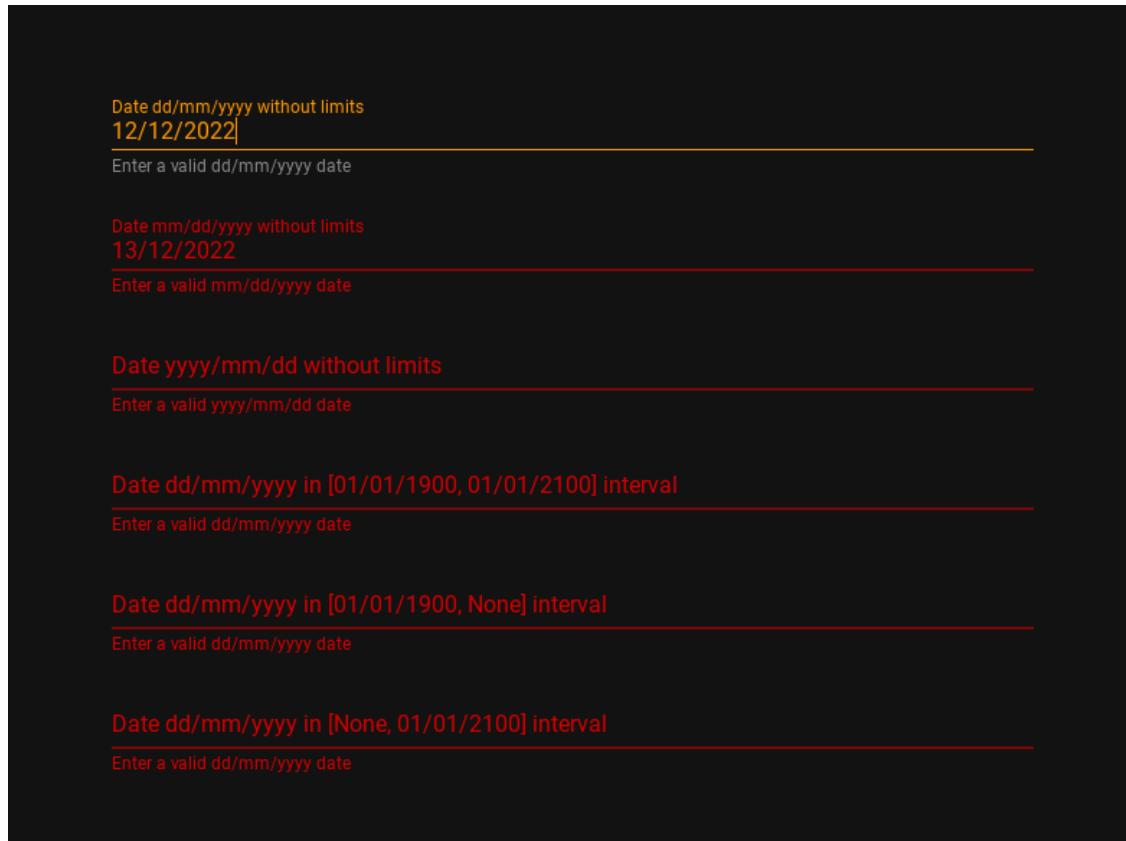

*validator* is an [OptionProperty](#) and defaults to *None*.


#### line\_color\_normal

Line color normal (static underline line) in (r, g, b, a) or string format.

```

MDTextField:
    hint_text: "line_color_normal"
    line_color_normal: "red"

```

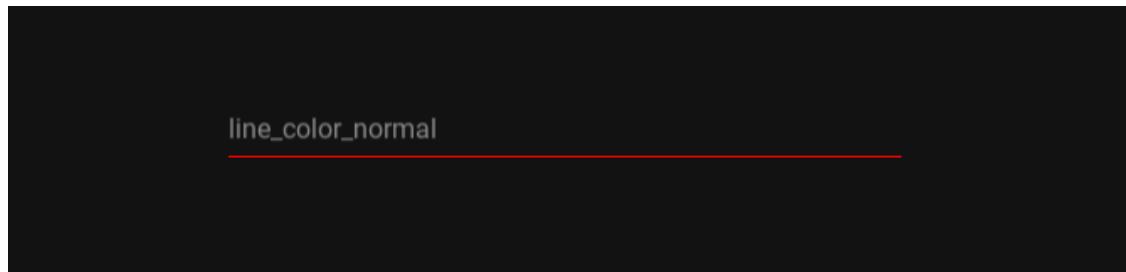

*line\_color\_normal* is an [ColorProperty](#) and defaults to [0, 0, 0, 0].

#### **line\_color\_focus**

Line color focus (active underline line) in (r, g, b, a) or string format.

```
MDTextField:  
    hint_text: "line_color_focus"  
    line_color_focus: "red"
```

*line\_color\_focus* is an [ColorProperty](#) and defaults to [0, 0, 0, 0].

#### **line\_anim**

If True, then text field shows animated underline when on focus.

*line\_anim* is an [BooleanProperty](#) and defaults to *True*.

#### **error\_color**

Error color in (r, g, b, a) or string format for **required = True**.

*error\_color* is an [ColorProperty](#) and defaults to [0, 0, 0, 0].

#### **fill\_color\_normal**

Fill background color in (r, g, b, a) or string format in ‘fill’ mode when] text field is out of focus.



*fill\_color\_normal* is an [ColorProperty](#) and defaults to [0, 0, 0, 0].

#### **fill\_color\_focus**

Fill background color in (r, g, b, a) or string format in ‘fill’ mode when the text field has focus.

*fill\_color\_focus* is an [ColorProperty](#) and defaults to [0, 0, 0, 0].

#### **active\_line**

Show active line or not.

*active\_line* is an [BooleanProperty](#) and defaults to *True*.

#### **error**

If True, then the text field goes into **error** mode.


*error* is an [BooleanProperty](#) and defaults to *False*.

#### **hint\_text\_color\_normal**

Hint text color in (r, g, b, a) or string format when text field is out of focus.

New in version 1.0.0.

```
MDTextField:
    hint_text: "hint_text_color_normal"
    hint_text_color_normal: "red"
```

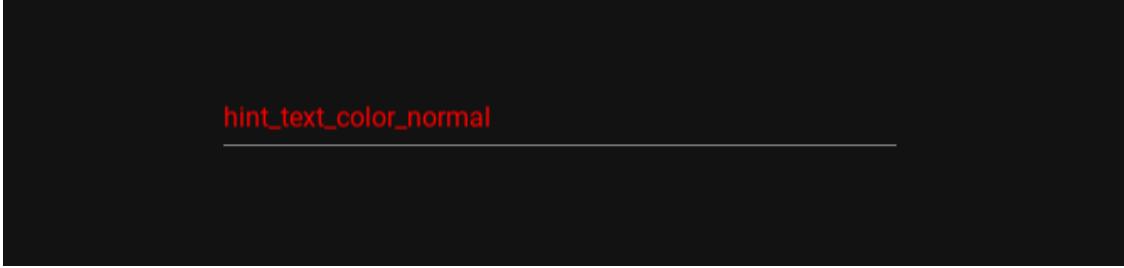

hint\_text\_color\_normal

*hint\_text\_color\_normal* is an `ColorProperty` and defaults to `[0, 0, 0, 0]`.

#### **hint\_text\_color\_focus**

Hint text color in (r, g, b, a) or string format when the text field has focus.

New in version 1.0.0.

```
MDTextField:
    hint_text: "hint_text_color_focus"
    hint_text_color_focus: "red"
```


*hint\_text\_color\_focus* is an `ColorProperty` and defaults to `[0, 0, 0, 0]`.

#### **helper\_text\_color\_normal**

Helper text color in (r, g, b, a) or string format when text field is out of focus.

New in version 1.0.0.

```
MDTextField:
    helper_text: "helper_text_color_normal"
    helper_text_mode: "persistent"
    helper_text_color_normal: "red"
```

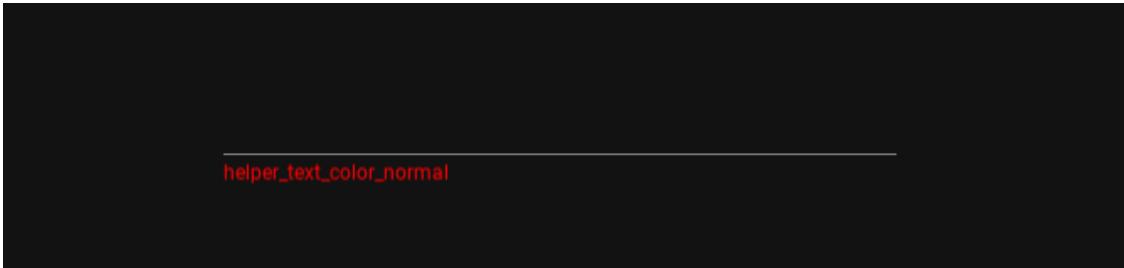

helper\_text\_color\_normal

*helper\_text\_color\_normal* is an `ColorProperty` and defaults to `[0, 0, 0, 0]`.

#### **helper\_text\_color\_focus**

Helper text color in (r, g, b, a) or string format when the text field has focus.

New in version 1.0.0.

```
MDTextField:
    helper_text: "helper_text_color_focus"
```

(continues on next page)

(continued from previous page)

```
helper_text_mode: "persistent"  
helper_text_color_focus: "red"
```


*helper\_text\_color\_focus* is an `ColorProperty` and defaults to `[0, 0, 0, 0]`.

#### **icon\_right\_color\_normal**

Color in (r, g, b, a) or string format of right icon when text field is out of focus.

New in version 1.0.0.

```
MDTextField:  
    icon_right: "language-python"  
    hint_text: "icon_right_color_normal"  
    icon_right_color_normal: "red"
```

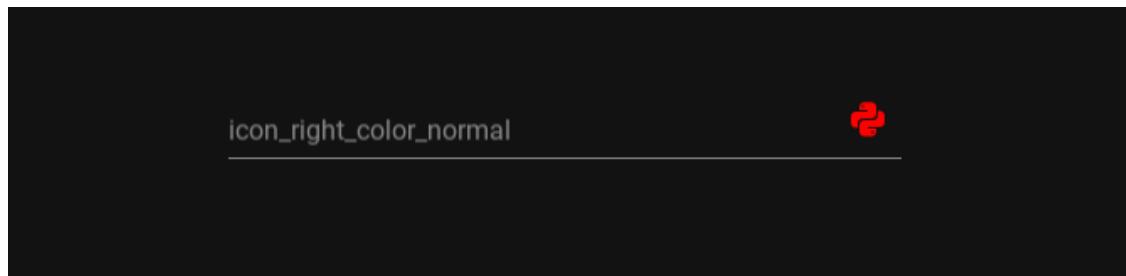

*icon\_right\_color\_normal* is an `ColorProperty` and defaults to `[0, 0, 0, 0]`.

#### **icon\_right\_color\_focus**

Color in (r, g, b, a) or string format of right icon when the text field has focus.

New in version 1.0.0.

```
MDTextField:  
    icon_right: "language-python"  
    hint_text: "icon_right_color_focus"  
    icon_right_color_focus: "red"
```

*icon\_right\_color\_focus* is an `ColorProperty` and defaults to `[0, 0, 0, 0]`.

#### **icon\_left\_color\_normal**

Color in (r, g, b, a) or string format of right icon when text field is out of focus.

New in version 1.0.0.

*icon\_left\_color\_normal* is an `ColorProperty` and defaults to `[0, 0, 0, 0]`.

#### **icon\_left\_color\_focus**

Color in (r, g, b, a) or string format of right icon when the text field has focus.

New in version 1.0.0.

*icon\_left\_color\_focus* is an `ColorProperty` and defaults to `[0, 0, 0, 0]`.

**max\_length\_text\_color**

Text color in (r, g, b, a) or string format of the maximum length of characters to be input.

New in version 1.0.0.

```
MDTextField:
    hint_text: "max_length_text_color"
    max_length_text_color: "red"
    max_text_length: 5
```

*max\_length\_text\_color* is an `ColorProperty` and defaults to `[0, 0, 0, 0]`.

**icon\_right**

Right icon texture.

---

**Note:** It's just a texture. It has no press/touch events.

---

*icon\_right* is an `StringProperty` and defaults to ''.

**icon\_left**


Left icon texture.

New in version 1.0.0.

---

**Note:** It's just a texture. It has no press/touch events. Also note that you cannot use the left and right icons at the same time yet.

---

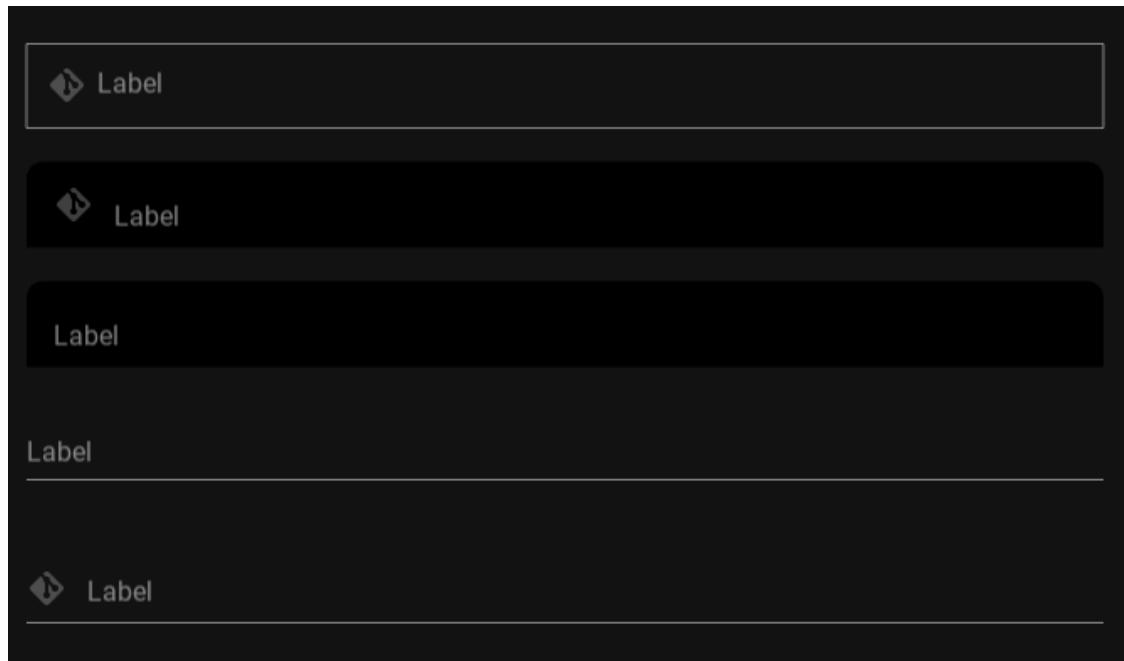


*icon\_left* is an `StringProperty` and defaults to ''.

**text\_color\_normal**

Text color in (r, g, b, a) or string format when text field is out of focus.

New in version 1.0.0.

```
MDTextField:  
    hint_text: "text_color_normal"  
    text_color_normal: "red"
```

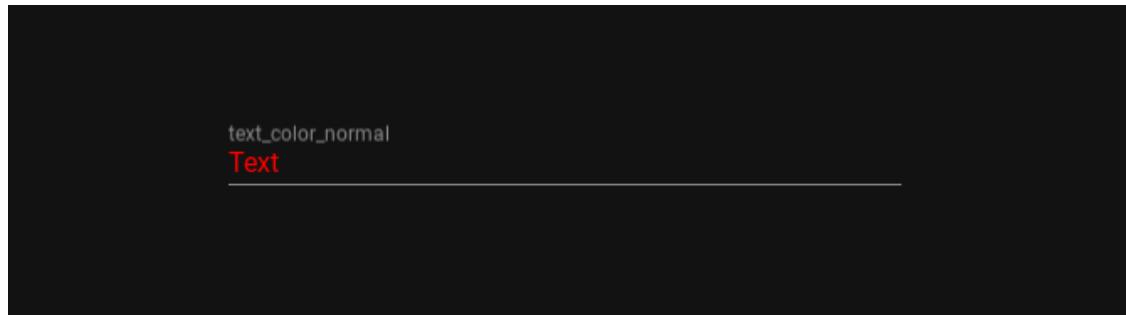

*text\_color\_normal* is an [ColorProperty](#) and defaults to [0, 0, 0, 0].

#### **text\_color\_focus**

Text color in (r, g, b, a) or string format when text field has focus.

New in version 1.0.0.

```
MDTextField:  
    hint_text: "text_color_focus"  
    text_color_focus: "red"
```

*text\_color\_focus* is an [ColorProperty](#) and defaults to [0, 0, 0, 0].

#### **font\_size**

Font size of the text in pixels.

*font\_size* is a [NumericProperty](#) and defaults to '16sp'.

#### **max\_height**

Maximum height of the text box when *multiline* = *True*.

```
MDTextField:  
    size_hint_x: .5  
    hint_text: "multiline=True"  
    max_height: "200dp"  
    mode: "fill"  
    fill_color: 0, 0, 0, .4  
    multiline: True  
    pos_hint: {"center_x": .5, "center_y": .5}
```

*max\_height* is a [NumericProperty](#) and defaults to 0.

#### **radius**

The corner radius for a text field in *fill* mode.

*radius* is a [ListProperty](#) and defaults to [10, 10, 0, 0].

**font\_name\_helper\_text**

Font name for helper text.

*font\_name\_helper\_text* is an `StringProperty` and defaults to ‘*Roboto*’.

**font\_name\_hint\_text**

Font name for hint text.

*font\_name\_hint\_text* is an `StringProperty` and defaults to ‘*Roboto*’.

**font\_name\_max\_length**

Font name for max text length.

*font\_name\_max\_length* is an `StringProperty` and defaults to ‘*Roboto*’.

**cancel\_all\_animations\_on\_double\_click(self)**

Cancels the animations of the text field when double-clicking on the text field.

**set\_colors\_to\_updated(self, interval: Union[float, int])****set\_default\_colors(self, interval: Union[float, int], updated: bool = False)**

Sets the default text field colors when initializing a text field object. Also called when the application palette changes.

**Parameters**

**updated** – If *True* - the color theme of the application has been changed. Updating the meanings of the colors.

**set\_notch\_rectangle(self, joining: bool = False)**

Animates a notch for the hint text in the rectangle of the text field of type *rectangle*.

**set\_active\_underline\_width(self, width: Union[float, int])**

Animates the width of the active underline line.

**set\_static\_underline\_color(self, color: list)**

Animates the color of a static underline line.

**set\_active\_underline\_color(self, color: list)**

Animates the fill color for ‘fill’ mode.

**set\_fill\_color(self, color: list)**

Animates the color of the hint text.

**set\_helper\_text\_color(self, color: list)**

Animates the color of the hint text.

**set\_max\_length\_text\_color(self, color: list)**

Animates the color of the max length text.

**set\_icon\_right\_color(self, color: list)**

Animates the color of the icon right.

**set\_icon\_left\_color(self, color: list)**

Animates the color of the icon left.

**set\_hint\_text\_color(self, focus: bool, error: bool = False)**

Animates the color of the hint text.

**set\_pos\_hint\_text(self, y: float, x: float = 12)**

Animates the x-axis width and y-axis height of the hint text.

**set\_hint\_text\_font\_size**(*self*, *font\_size*: *float*)  
Animates the font size of the hint text.

**set\_max\_text\_length**(*self*)  
Called when text is entered into a text field.

**check\_text**(*self*, *interval*: *Union[float, int]*)

**set\_text**(*self*, *instance\_text\_field*, *text*: *str*)  
Called when text is entered into a text field.

**set\_x\_pos**(*self*)

**set\_objects\_labels**(*self*)  
Creates labels objects for the parameters`helper\_text`,'hint\_text` , etc.

**on\_helper\_text**(*self*, *instance\_text\_field*, *helper\_text*: *str*)

**on\_focus**(*self*, *instance\_text\_field*, *focus*: *bool*)

**on\_icon\_left**(*self*, *instance\_text\_field*, *icon\_name*: *str*)

**on\_icon\_right**(*self*, *instance\_text\_field*, *icon\_name*: *str*)

**on\_disabled**(*self*, *instance\_text\_field*, *disabled\_value*: *bool*)

**on\_error**(*self*, *instance\_text\_field*, *error*: *bool*)  
Changes the primary colors of the text box to match the *error* value (text field is in an error state or not).

**on\_hint\_text**(*self*, *instance\_text\_field*, *hint\_text*: *str*)

**on\_width**(*self*, *instance\_text\_field*, *width*: *float*)  
Called when the application window is resized.

**on\_height**(*self*, *instance\_text\_field*, *value\_height*: *float*)

**on\_text\_color\_normal**(*self*, *instance\_text\_field*, *color*: *Union[list, str]*)

**on\_hint\_text\_color\_normal**(*self*, *instance\_text\_field*, *color*: *Union[list, str]*)

**on\_helper\_text\_color\_normal**(*self*, *instance\_text\_field*, *color*: *Union[list, str]*)

**on\_icon\_right\_color\_normal**(*self*, *instance\_text\_field*, *color*: *Union[list, str]*)

**on\_line\_color\_normal**(*self*, *instance\_text\_field*, *color*: *Union[list, str]*)


**on\_max\_length\_text\_color**(*self*, *instance\_text\_field*, *color*: *Union[list, str]*)

## 2.3.45 SelectionControls

### See also:

Material Design spec, Selection controls

**Selection controls allow the user to select options.**

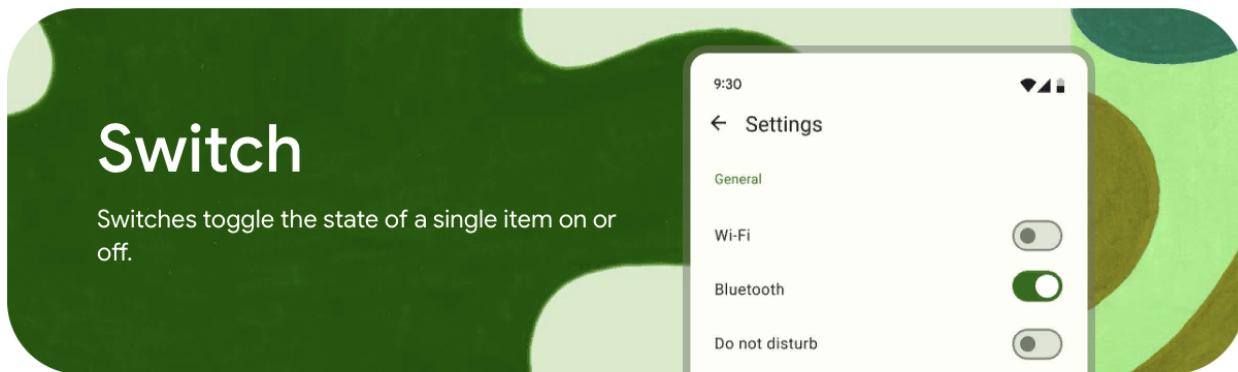

KivyMD provides the following selection controls classes for use:

- *MDCheckbox*
- *MDSwitch*

### MDCheckbox

```
from kivy.lang import Builder
from kivymd.app import MDApp

KV = """
MDFloatLayout:

    MDCheckbox:
        size_hint: None, None
        size: "48dp", "48dp"
        pos_hint: {'center_x': .5, 'center_y': .5}
    ...

class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

Test().run()
```

---

**Note:** Be sure to specify the size of the checkbox. By default, it is (dp(48), dp(48)), but the ripple effect takes up all the available space.

## Control state

```
MDCheckbox:  
    on_active: app.on_checkbox_active(*args)  
  
def on_checkbox_active(self, checkbox, value):  
    if value:  
        print('The checkbox', checkbox, 'is active', 'and', checkbox.state, 'state')  
    else:  
        print('The checkbox', checkbox, 'is inactive', 'and', checkbox.state, 'state')
```

## MDCheckbox with group

```
from kivy.lang import Builder  
  
from kivymd.app import MDApp  
  
KV = '''  
<Check@MDCheckbox>:  
    group: 'group'  
    size_hint: None, None  
    size: dp(48), dp(48)  
  
MDFloatLayout:  
  
    Check:  
        active: True  
        pos_hint: {'center_x': .4, 'center_y': .5}  
  
    Check:  
        pos_hint: {'center_x': .6, 'center_y': .5}  
...  
  
class Test(MDApp):  
    def build(self):  
        return Builder.load_string(KV)  
  
Test().run()
```

## MDSwitch

```
from kivy.lang import Builder

from kivymd.app import MDApp

KV = """
MDFloatLayout:


    MDSwitch:
        pos_hint: {'center_x': .5, 'center_y': .5}
    """

class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

Test().run()
```

**Note:** For `MDSwitch` size is not required. By default it is (`dp(36)`, `dp(48)`), but you can increase the width if you want.

```
MDSwitch:
    width: dp(64)
```



**Note:** Control state of `MDSwitch` same way as in `MDCheckbox`.

## MDSwitch in M3 style

```
from kivy.lang import Builder

from kivymd.app import MDApp

KV = """
MDScreen:

    MDSwitch:
        pos_hint: {'center_x': .5, 'center_y': .5}
        active: True
    ...

class Test(MDApp):
    def build(self):
        self.theme_cls.material_style = "M3"
        return Builder.load_string(KV)

Test().run()
```

## API - kivymd.uix.selectioncontrol.selectioncontrol

**class kivymd.uix.selectioncontrol.selectioncontrol(\*\*kwargs)**

Class implements a circular ripple effect.

### active

Indicates if the checkbox is active or inactive.

*active* is a `BooleanProperty` and defaults to `False`.

### checkbox\_icon\_normal

Background icon of the checkbox used for the default graphical representation when the checkbox is not pressed.

*checkbox\_icon\_normal* is a `StringProperty` and defaults to ‘checkbox-blank-outline’.

### checkbox\_icon\_down

Background icon of the checkbox used for the default graphical representation when the checkbox is pressed.

*checkbox\_icon\_down* is a `StringProperty` and defaults to ‘checkbox-marked’.

### radio\_icon\_normal

Background icon (when using the `group` option) of the checkbox used for the default graphical representation when the checkbox is not pressed.

*radio\_icon\_normal* is a `StringProperty` and defaults to ‘checkbox-blank-circle-outline’.

### radio\_icon\_down

Background icon (when using the `group` option) of the checkbox used for the default graphical representation when the checkbox is pressed.

`radio_icon_down` is a `StringProperty` and defaults to '`checkbox-marked-circle`'.

#### **color\_active**

Color in (r, g, b, a) or string format when the checkbox is in the active state.

New in version 1.0.0.

```
MDCheckbox:  
    color_active: "red"
```



`color_active` is a `ColorProperty` and defaults to `None`.

#### **color\_inactive**

Color in (r, g, b, a) or string format when the checkbox is in the inactive state.

New in version 1.0.0.

```
MDCheckbox:  
    color_inactive: "blue"
```



`color_inactive` is a `ColorProperty` and defaults to `None`.

#### **disabled\_color**

Color in (r, g, b, a) or string format when the checkbox is in the disabled state.

```
MDCheckbox:  
    disabled_color: "lightgrey"  
    disabled: True  
    active: True
```



*disabled\_color* is a `ColorProperty` and defaults to `None`.

#### **selected\_color**

Color in (r, g, b, a) or string format when the checkbox is in the active state.

Deprecated since version 1.0.0: Use `color_active` instead.

*selected\_color* is a `ColorProperty` and defaults to `None`.

#### **unselected\_color**

Color in (r, g, b, a) or string format when the checkbox is in the inactive state.

Deprecated since version 1.0.0: Use `color_inactive` instead.

*unselected\_color* is a `ColorProperty` and defaults to `None`.

#### **update\_primary\_color(self, instance, value)**

#### **update\_icon(self, \*args)**

#### **update\_color(self, \*args)**

#### **on\_state(self, \*args)**

#### **on\_active(self, \*args)**

### **class kivymd.uix.selectioncontrol.selectioncontrol.MDSwitch(\*\*kwargs)**

Float layout class. See module documentation for more information.

#### **active**

Indicates if the switch is active or inactive.

*active* is a `BooleanProperty` and defaults to `False`.

#### **icon\_active**

Thumb icon when the switch is in the active state (only M3 style).

New in version 1.0.0.

**MDSwitch:**

```
active: True  
icon_active: "check"
```



*icon\_active* is a `StringProperty` and defaults to “”.

**icon\_inactive**

Thumb icon when the switch is in an inactive state (only M3 style).

New in version 1.0.0.

**MDSwitch:**

```
icon_inactive: "close"
```



*icon\_inactive* is a `StringProperty` and defaults to “”.

**icon\_active\_color**

Thumb icon color in (r, g, b, a) or string format when the switch is in the active state (only M3 style).

New in version 1.0.0.

**MDSwitch:**

```
active: True
```

(continues on next page)

(continued from previous page)

```
icon_active: "check"
icon_active_color: "white"
```



*icon\_active\_color* is a [ColorProperty](#) and defaults to *None*.

#### **icon\_inactive\_color**

Thumb icon color in (r, g, b, a) or string format when the switch is in an inactive state (only M3 style).

New in version 1.0.0.

```
MDSwitch:
    icon_inactive: "close"
    icon_inactive_color: "grey"
```




*icon\_inactive\_color* is a [ColorProperty](#) and defaults to *None*.

#### **thumb\_color\_active**

The color in (r, g, b, a) or string format of the thumb when the switch is active.

New in version 1.0.0.

```
MDSwitch:  
    active: True  
    thumb_color_active: "brown"
```



*thumb\_color\_active* is an [ColorProperty](#) and default to *None*.

#### **thumb\_color\_inactive**

The color in (r, g, b, a) or string format of the thumb when the switch is inactive.

New in version 1.0.0.

```
MDSwitch:  
    thumb_color_inactive: "brown"
```




*thumb\_color\_inactive* is an [ColorProperty](#) and default to *None*.

#### **thumb\_color\_disabled**

The color in (r, g, b, a) or string format of the thumb when the switch is in the disabled state.

```
MDSwitch:  
    active: True  
    thumb_color_disabled: "brown"  
    disabled: True
```




`thumb_color_disabled` is an `ColorProperty` and default to `None`.

#### **track\_color\_active**

The color in (r, g, b, a) or string format of the track when the switch is active.

```
MDSwitch:  
    active: True  
    track_color_active: "red"
```




`track_color_active` is an `ColorProperty` and default to `None`.

#### **track\_color\_inactive**

The color in (r, g, b, a) or string format of the track when the switch is inactive.

New in version 1.0.0.

```
MDSwitch:  
    track_color_inactive: "red"
```



`track_color_inactive` is an `ColorProperty` and default to `None`.

#### `track_color_disabled`

The color in (r, g, b, a) or string format of the track when the switch is in the disabled state.

```
MDSwitch:
    track_color_disabled: "lightgrey"
    disabled: True
```



`track_color_disabled` is an `ColorProperty` and default to `None`.

`set_icon(self, instance_switch, icon_value: str)`


`on_active(self, instance_switch, active_value: bool)`

`on_thumb_down(self)`

Called at the `on_touch_down` event of the `Thumb` object. Indicates the state of the switch “on/off” by an animation of increasing the size of the thumb.

### 2.3.46 SegmentedControl

New in version 1.0.0.

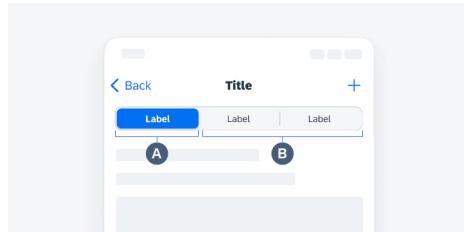

#### Usage

Declarative KV style

```
from kivy.lang import Builder

from kivymd.app import MDApp

KV = '''
MDScreen:

    MDSegmentedControl:
        pos_hint: {"center_x": .5, "center_y": .5}

        MDSegmentedControlItem:
            text: "Male"

        MDSegmentedControlItem:
            text: "Female"

        MDSegmentedControlItem:
            text: "All"
    ...

class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return Builder.load_string(KV)

Example().run()
```

Declarative python style

```
from kivymd.app import MDApp
from kivymd.uix.screen import MDScreen
from kivymd.uix.segmentedcontrol import (
```

(continues on next page)

(continued from previous page)

```

        MDSegmentedControl, MDSegmentedControlItem
    )

class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return (
            MDScreen(
                MDSegmentedControl(
                    MDSegmentedControlItem(
                        text="Male"
                    ),
                    MDSegmentedControlItem(
                        text="Female"
                    ),
                    MDSegmentedControlItem(
                        text="All"
                    ),
                    pos_hint={"center_x": 0.5, "center_y": 0.5}
                )
            )
        )
    Example().run()

```

## Events

```

MDSegmentedControl:
    on_active: app.on_active(*args)

```

```

def on_active(
    self,
    segmented_control: MDSegmentedControl,
    segmented_item: MDSegmentedControlItem,
) -> None:
    '''Called when the segment is activated.'''

```

## API - kivymd.uix.segmentedcontrol.segmentedcontrol

```
class kivymd.uix.segmentedcontrol.segmentedcontrol.MDSegmentedControlItem(**kwargs)
```

Implements a label to place on the SegmentPanel panel.

See MDLabel class documentation for more information.

```
class kivymd.uix.segmentedcontrol.segmentedcontrol.MDSegmentedControl(*args, **kwargs)
```

Implements a segmented control panel.

Relative layout class. For more information, see in the RelativeLayout class documentation.

### Events

#### *on\_active*


Called when the segment is activated.

### md\_bg\_color

Background color of the segment panel in (r, g, b, a) or string format.

```
MDSegmentedControl:
```

```
    md_bg_color: "brown"
```

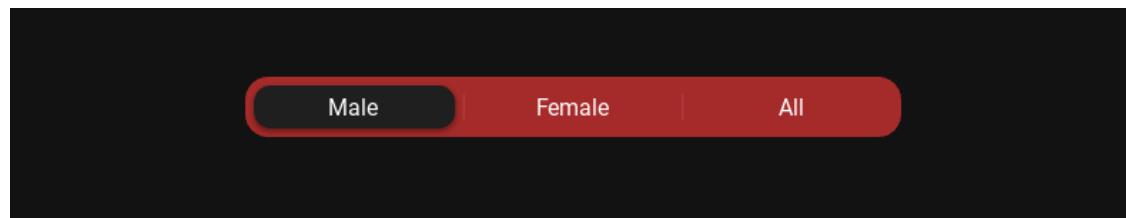

*md\_bg\_color* is an ColorProperty and defaults to [0, 0, 0, 0].


### segment\_color

Color of the active segment in (r, g, b, a) or string format.

```
MDSegmentedControl:
```

```
    md_bg_color: "brown"
```

```
    segment_color: "red"
```

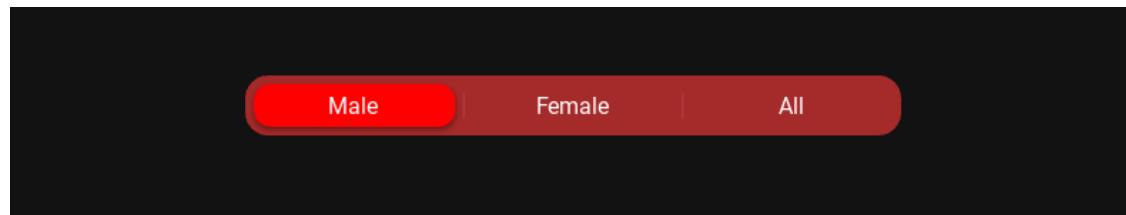


```
MDSegmentedControl:
```

```
    md_bg_color: "brown"
```

```
    segment_color: "red"
```

```
MDSegmentedControlItem:
```

```
    text: "[color=fff]Male[/color]"
```

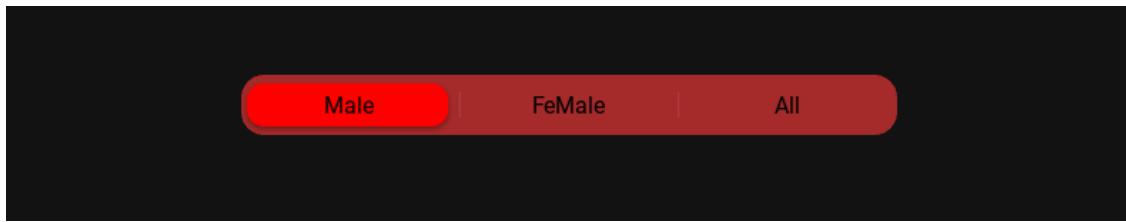


*segment\_color* is an `ColorProperty` and defaults to `[0, 0, 0, 0]`.

#### **segment\_panel\_height**

Height of the segment panel.

```
MDSegmentedControl:
    segment_panel_height: "56dp"
```

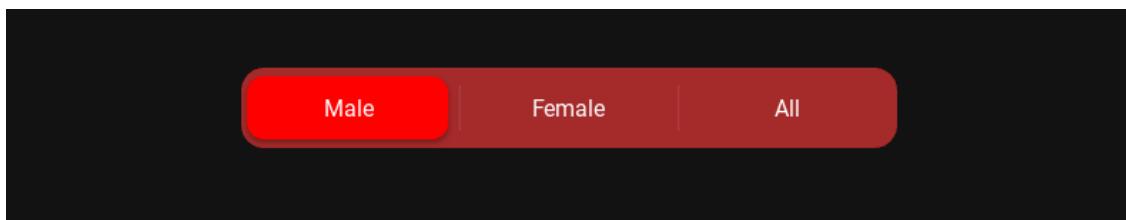


*segment\_panel\_height* is an `NumericProperty` and defaults to `'42dp'`.

#### **separator\_color**

The color of the separator between the segments in (r, g, b, a) or string format.

```
MDSegmentedControl:
    md_bg_color: "brown"
    segment_color: "red"
    separator_color: "white"
```

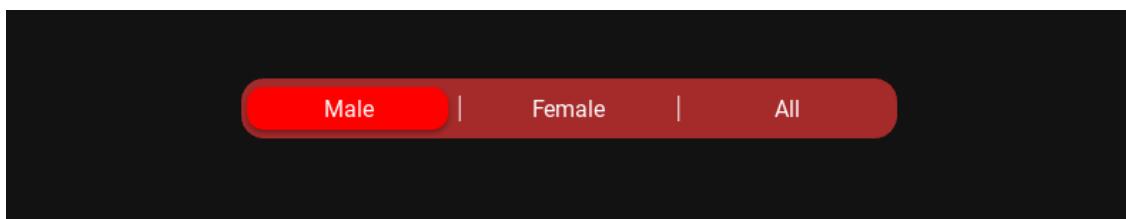


*separator\_color* is an `ColorProperty` and defaults to `None`.

#### **radius**

Radius of the segment panel.

```
MDSegmentedControl:
    radius: 0
```

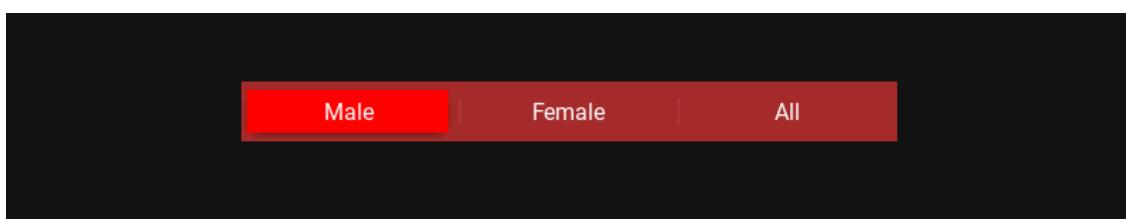

*radius* is an `VariableListProperty` and defaults to [16, 16, 16, 16].

#### `segment_switching_transition`

Name of the animation type for the switch segment.

*segment\_switching\_transition* is a `StringProperty` and defaults to ‘in\_cubic’.

#### `segment_switching_duration`

Name of the animation type for the switch segment.

*segment\_switching\_duration* is a `NumericProperty` and defaults to 0.2.

#### `current_active_segment`

The current active element of the `MDSegmentedControlItem` class.

*current\_active\_segment* is a `ObjectProperty` and defaults to *None*.

#### `set_default_colors(self, *args)`

Sets the colors of the panel and the switch if the colors are not set by the user.

#### `animation_segment_switch(self, widget: MDSegmentedControlItem)`

Animates the movement of the switch.

#### `update_segment_panel_width(self, widget: MDSegmentedControlItem)`

Sets the width of the panel for the elements of the `MDSegmentedControlItem` class.

#### `update_separator_color(self, widget: MDSeparator)`

Updates the color of the separators between segments.

#### `add_widget(self, widget, *args, **kwargs)`

Add a new widget as a child of this widget.

#### Parameters

##### `widget: Widget`

Widget to add to our list of children.

##### `index: int, defaults to 0`

Index to insert the widget in the list. Notice that the default of 0 means the widget is inserted at the beginning of the list and will thus be drawn on top of other sibling widgets. For a full discussion of the index and widget hierarchy, please see the Widgets Programming Guide.

New in version 1.0.5.

##### `canvas: str, defaults to None`

Canvas to add widget’s canvas to. Can be ‘before’, ‘after’ or None for the default canvas.

New in version 1.9.0.

```
>>> from kivy.uix.button import Button
>>> from kivy.uix.slider import Slider
>>> root = Widget()
>>> root.add_widget(Button())
>>> slider = Slider()
>>> root.add_widget(slider)
```

#### `on_active(self, *args)`

Called when the segment is activated.


```
on_press_segment(self, widget: MDSegmentedControlItem, touch)
```

### 2.3.47 Dialog

See also:

Material Design spec, Dialogs

**Dialogs inform users about a task and can contain critical information, require decisions, or involve multiple tasks.**

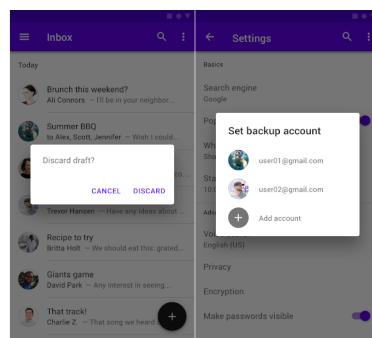

### Usage

```
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.button import MDFloatButton
from kivymd.uix.dialog import MDDialog

KV = '''
MDFloatLayout:

    MDFloatButton:
        text: "ALERT DIALOG"
        pos_hint: {'center_x': .5, 'center_y': .5}
        on_release: app.show_alert_dialog()
'''


class Example(MDApp):
    dialog = None


    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return Builder.load_string(KV)
```

(continues on next page)

(continued from previous page)

```
def show_alert_dialog(self):
    if not self.dialog:
        self.dialog = MDDialog(
            text="Discard draft?",
            buttons=[
                MDFlatButton(
                    text="CANCEL",
                    theme_text_color="Custom",
                    text_color=self.theme_cls.primary_color,
                ),
                MDFlatButton(
                    text="DISCARD",
                    theme_text_color="Custom",
                    text_color=self.theme_cls.primary_color,
                ),
            ],
        )
    self.dialog.open()
```

Example().run()

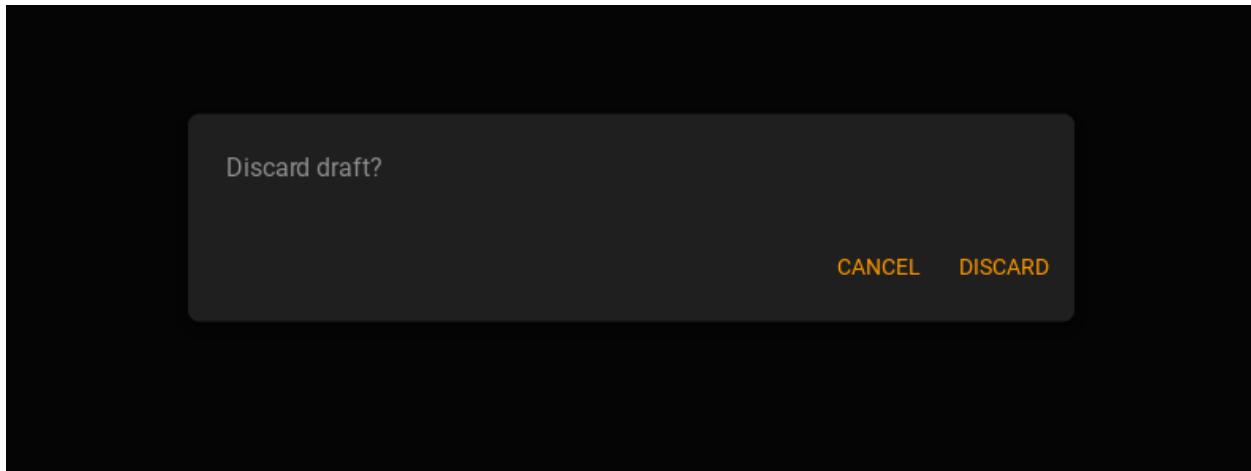

## API - kivymd.uix.dialog.dialog

**class kivymd.uix.dialog.dialog.BaseDialog(\*\*kwargs)**

ModalView class. See module documentation for more information.

### Events

***on\_pre\_open:***

Fired before the ModalView is opened. When this event is fired ModalView is not yet added to window.

***on\_open:***

Fired when the ModalView is opened.

***on\_pre\_dismiss:***

Fired before the ModalView is closed.

***on\_dismiss:***

Fired when the ModalView is closed. If the callback returns True, the dismiss will be canceled.

Changed in version 1.11.0: Added events *on\_pre\_open* and *on\_pre\_dismiss*.

Changed in version 2.0.0: Added property ‘*overlay\_color*’.

Changed in version 2.1.0: Marked *attach\_to* property as deprecated.

**elevation**

See `kivymd.uix.behaviors.elevation.CommonElevationBehavior.elevation` attribute for more information.

New in version 1.1.0.

*elevation* is an `NumericProperty` and defaults to 3.

**shadow\_softness**

See `kivymd.uix.behaviors.elevation.CommonElevationBehavior.shadow_softness` attribute for more information.

New in version 1.1.0.

*shadow\_softness* is an `NumericProperty` and defaults to 24.

**shadow\_offset**

See `kivymd.uix.behaviors.elevation.CommonElevationBehavior.shadow_offset` attribute for more information.


New in version 1.1.0.

*shadow\_offset* is an `ListProperty` and defaults to [0, 4].

**radius**

Dialog corners rounding value.

```
[...]
self.dialog = MDDialog(
    text="Oops! Something seems to have gone wrong!",
    radius=[20, 7, 20, 7],
)
[...]
```

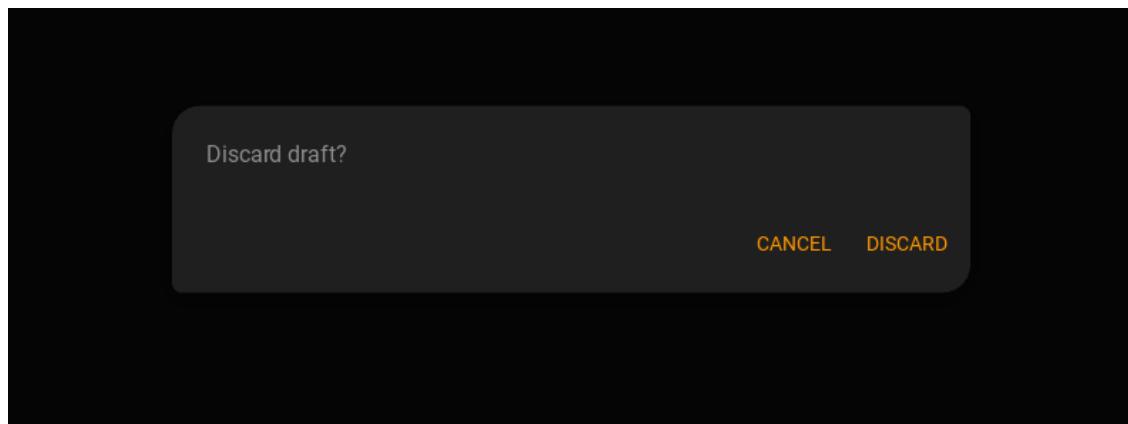

*radius* is an `ListProperty` and defaults to [7, 7, 7, 7].

```
class kivymd.uix.dialog.dialog.MDDialog(**kwargs)
```

ModalView class. See module documentation for more information.

### Events

#### *on\_pre\_open:*

Fired before the ModalView is opened. When this event is fired ModalView is not yet added to window.

#### *on\_open:*

Fired when the ModalView is opened.

#### *on\_pre\_dismiss:*

Fired before the ModalView is closed.

#### *on\_dismiss:*

Fired when the ModalView is closed. If the callback returns True, the dismiss will be canceled.

Changed in version 1.11.0: Added events *on\_pre\_open* and *on\_pre\_dismiss*.


Changed in version 2.0.0: Added property ‘overlay\_color’.

Changed in version 2.1.0: Marked *attach\_to* property as deprecated.

### title

Title dialog.

```
[...]
    self.dialog = MDDialog(
        title="Reset settings?",
        buttons=[
            MDFlatButton(
                text="CANCEL",
                theme_text_color="Custom",
                text_color=self.theme_cls.primary_color,
            ),
            MDFlatButton(
                text="ACCEPT",
                theme_text_color="Custom",
                text_color=self.theme_cls.primary_color,
            ),
        ],
    )
[...]
```

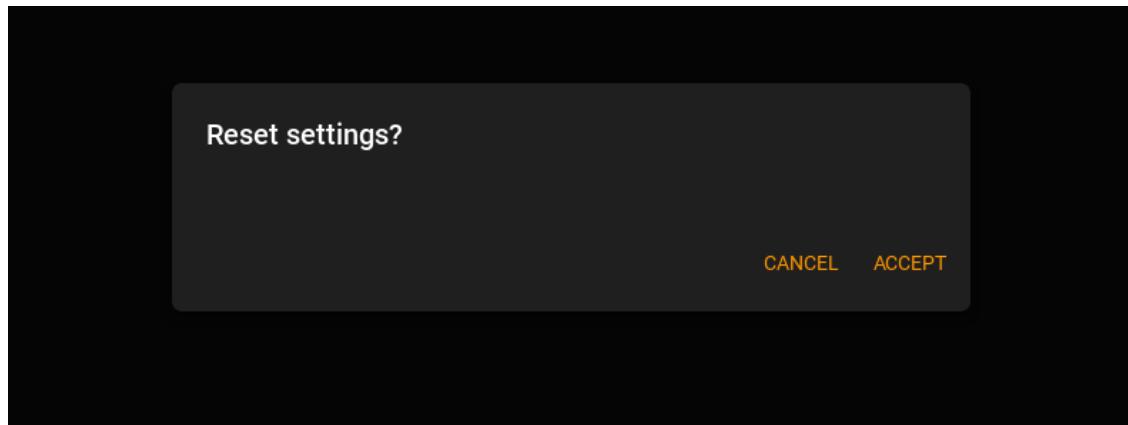


`title` is an `StringProperty` and defaults to ''.

#### text

Text dialog.

```
[...]
    self.dialog = MDDialog(
        title="Reset settings?",
        text="This will reset your device to its default factory settings.",
        buttons=[
            MDFlatButton(
                text="CANCEL",
                theme_text_color="Custom",
                text_color=self.theme_cls.primary_color,
            ),
            MDFlatButton(
                text="ACCEPT",
                theme_text_color="Custom",
                text_color=self.theme_cls.primary_color,
            ),
        ],
    )
[...]
```

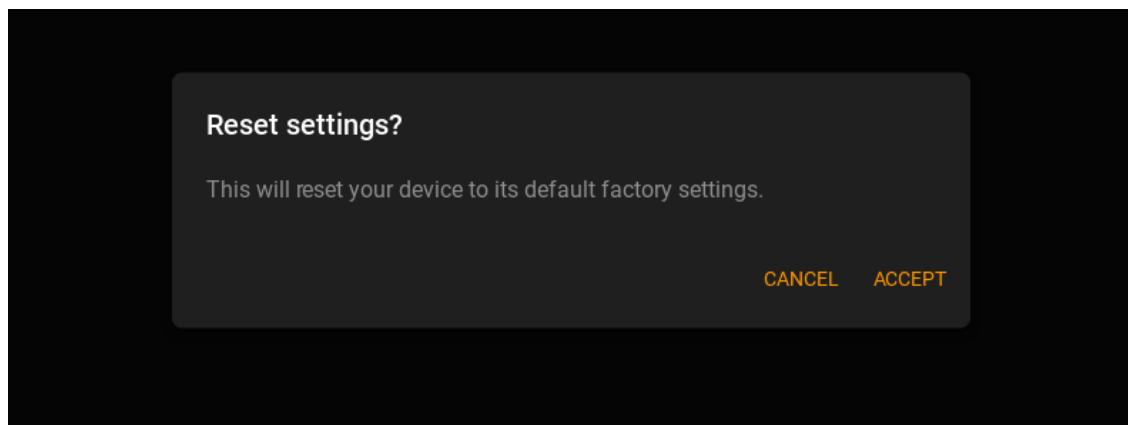


`text` is an `StringProperty` and defaults to ''.

#### buttons

List of button objects for dialog. Objects must be inherited from `BaseButton` class.

```
[...]
    self.dialog = MDDialog(
        text="Discard draft?",
        buttons=[
            MDFlatButton(text="CANCEL"), MDRaisedButton(text="DISCARD"),
        ],
    )
[...]
```

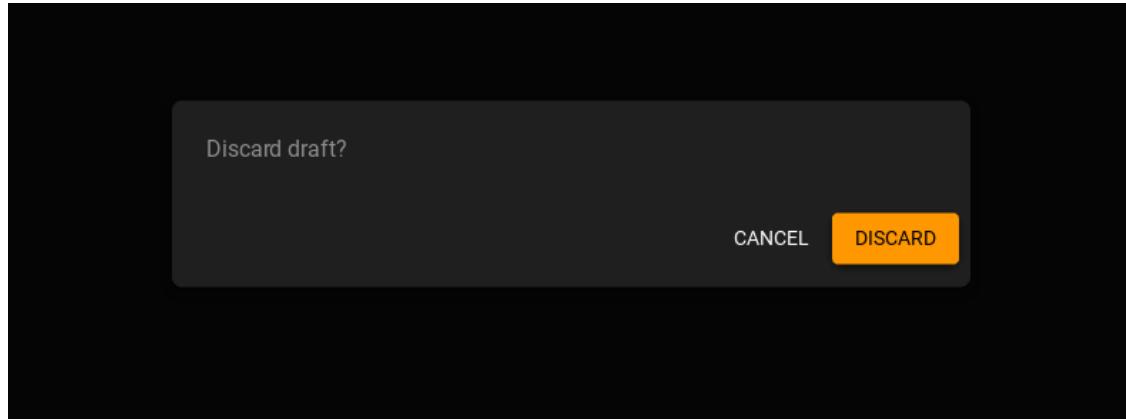

`buttons` is an `ListProperty` and defaults to `[]`.

#### items

List of items objects for dialog. Objects must be inherited from `BaseListItem` class.

```
from kivy.lang import Builder
from kivy.properties import StringProperty

from kivymd.app import MDApp
from kivymd.uix.dialog import MDDialog
from kivymd.uix.list import OneLineAvatarListItem

KV = '''
<Item>

    ImageLeftWidget:
        source: root.source


    MDFloatLayout:

        MDFlatButton:
            text: "ALERT DIALOG"
            pos_hint: {'center_x': .5, 'center_y': .5}
            on_release: app.show_simple_dialog()
'''
```

(continues on next page)

(continued from previous page)

```

class Item(OneLineAvatarListItem):
    divider = None
    source = StringProperty()


class Example(MDApp):
    dialog = None

    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return Builder.load_string(KV)

    def show_simple_dialog(self):
        if not self.dialog:
            self.dialog = MDDialog(
                title="Set backup account",
                type="simple",
                items=[
                    Item(text="user01@gmail.com", source="kivymd/images/logo/kivymd-  
icon-128.png"),
                    Item(text="user02@gmail.com", source="data/logo/kivy-icon-128.  
png"),
                ],
            )
            self.dialog.open()

Example().run()

```

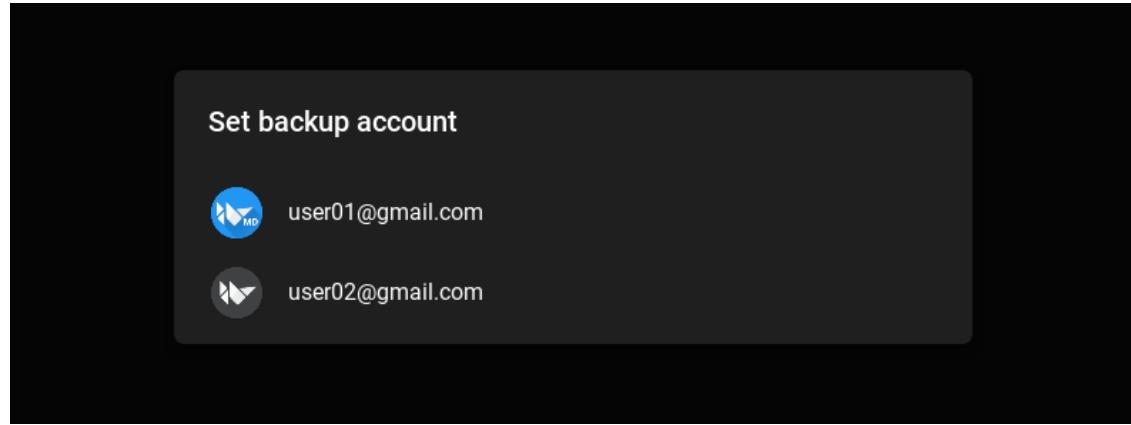

```

from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.button import MDFlatButton
from kivymd.uix.dialog import MDDialog
from kivymd.uix.list import OneLineAvatarIconListItem

KV = '''

```

(continues on next page)

(continued from previous page)

```

<ItemConfirm>
    on_release: root.set_icon(check)

    CheckboxLeftWidget:
        id: check
        group: "check"

MDFloatLayout:

    MDFlatButton:
        text: "ALERT DIALOG"
        pos_hint: {'center_x': .5, 'center_y': .5}
        on_release: app.show_confirmation_dialog()
    ...

class ItemConfirm(OneLineAvatarIconListItem):
    divider = None

    def set_icon(self, instance_check):
        instance_check.active = True
        check_list = instance_check.get_widgets(instance_check.group)
        for check in check_list:
            if check != instance_check:
                check.active = False


class Example(MDApp):
    dialog = None

    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return Builder.load_string(KV)

    def show_confirmation_dialog(self):
        if not self.dialog:
            self.dialog = MDDialog(
                title="Phone ringtone",
                type="confirmation",
                items=[
                    ItemConfirm(text="Callisto"),
                    ItemConfirm(text="Luna"),
                    ItemConfirm(text="Night"),
                    ItemConfirm(text="Solo"),
                    ItemConfirm(text="Phobos"),
                    ItemConfirm(text="Diamond"),
                    ItemConfirm(text="Sirena"),
                    ItemConfirm(text="Red music"),
                    ItemConfirm(text="Allergio"),
                    ItemConfirm(text="Magic"),

```

(continues on next page)


(continued from previous page)

```

        ItemConfirm(text="Tic-tac"),
    ],
    buttons=[
        MDFlatButton(
            text="CANCEL",
            theme_text_color="Custom",
            text_color=self.theme_cls.primary_color,
        ),
        MDFlatButton(
            text="OK",
            theme_text_color="Custom",
            text_color=self.theme_cls.primary_color,
        ),
    ],
)
self.dialog.open()

```

Example().run()

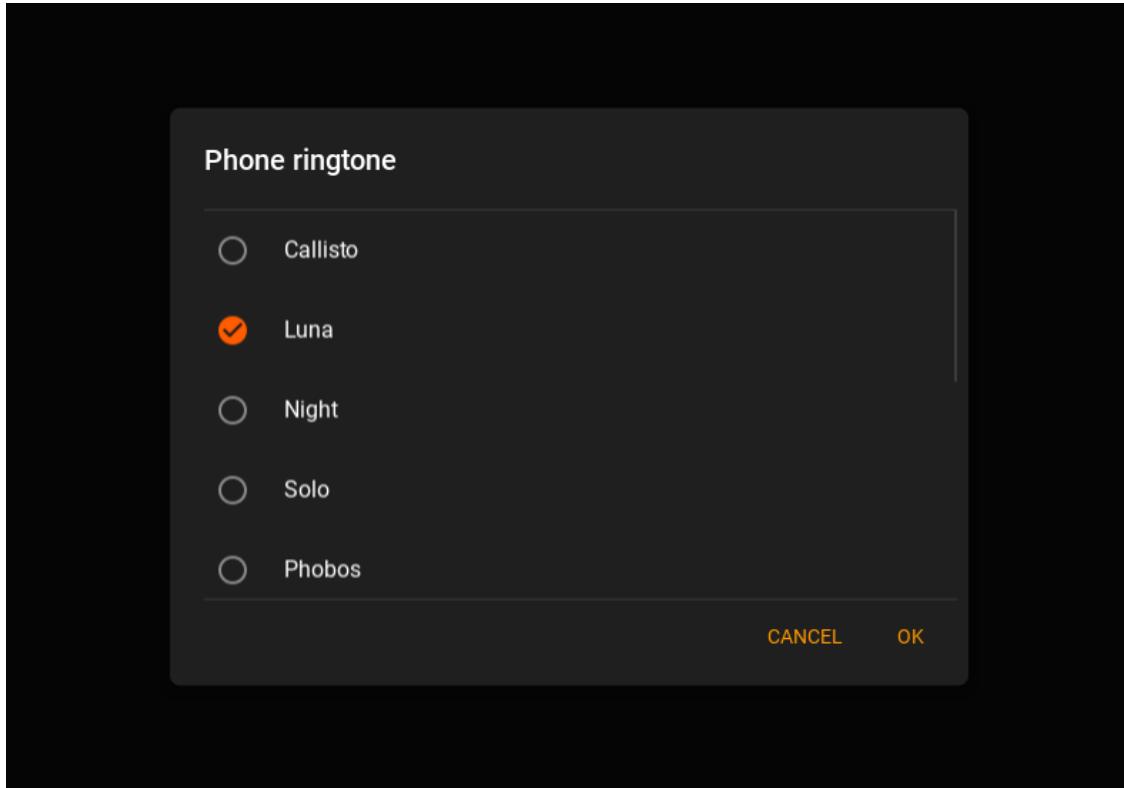

`items` is an `ListProperty` and defaults to `[]`.

#### width\_offset

Dialog offset from device width.

`width_offset` is an `NumericProperty` and defaults to `dp(48)`.

#### type

Dialog type. Available option are '`alert`', '`simple`', '`confirmation`', '`custom`'.

`type` is an `OptionProperty` and defaults to ‘`alert`’.

#### content\_cls

Custom content class.

Declarative KV style

```
from kivy.lang import Builder
from kivy.uix.boxlayout import BoxLayout

from kivymd.app import MDApp
from kivymd.uix.button import MDFlatButton
from kivymd.uix.dialog import MDDialog

KV = '''
<Content>
    orientation: "vertical"
    spacing: "12dp"
    size_hint_y: None
    height: "120dp"

    MDTextField:
        hint_text: "City"

    MDTextField:
        hint_text: "Street"

MDFloatLayout:

    MDFloatButton:
        text: "ALERT DIALOG"
        pos_hint: {'center_x': .5, 'center_y': .5}
        on_release: app.show_confirmation_dialog()
'''


class Content(BoxLayout):
    pass


class Example(MDApp):
    dialog = None

    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return Builder.load_string(KV)

    def show_confirmation_dialog(self):
        if not self.dialog:
            self.dialog = MDDialog(
                title="Address:",
                type="custom",

```

(continues on next page)

(continued from previous page)

```

        content_cls=Content(),
        buttons=[
            MDFlatButton(
                text="CANCEL",
                theme_text_color="Custom",
                text_color=self.theme_cls.primary_color,
            ),
            MDFlatButton(
                text="OK",
                theme_text_color="Custom",
                text_color=self.theme_cls.primary_color,
            ),
        ],
    )
self.dialog.open()

```

```
Example().run()
```

Declarative Python style

```

from kivymd.app import MDApp
from kivymd.uix.boxlayout import MDBBoxLayout
from kivymd.uix.button import MDFlatButton
from kivymd.uix.dialog import MDDialog
from kivymd.uix.floatlayout import MDFloatLayout
from kivymd.uix.textfield import MDTextField


class Example(MDApp):
    dialog = None

    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return (
            MDFloatLayout(
                MDFlatButton(
                    text="ALERT DIALOG",
                    pos_hint={'center_x': 0.5, 'center_y': 0.5},
                    on_release=self.show_confirmation_dialog,
                )
            )
        )

    def show_confirmation_dialog(self, *args):
        if not self.dialog:
            self.dialog = MDDialog(
                title="Address:",
                type="custom",
                content_cls=MDBBoxLayout(

```

(continues on next page)


(continued from previous page)

```

        hint_text="City",
),
MDTextField(
    hint_text="Street",
),
orientation="vertical",
spacing="12dp",
size_hint_y=None,
height="120dp",
),
buttons=[
    MDFlatButton(
        text="CANCEL",
        theme_text_color="Custom",
        text_color=self.theme_cls.primary_color,
    ),
    MDFlatButton(
        text="OK",
        theme_text_color="Custom",
        text_color=self.theme_cls.primary_color,
    ),
],
)
self.dialog.open()

```

Example().run()

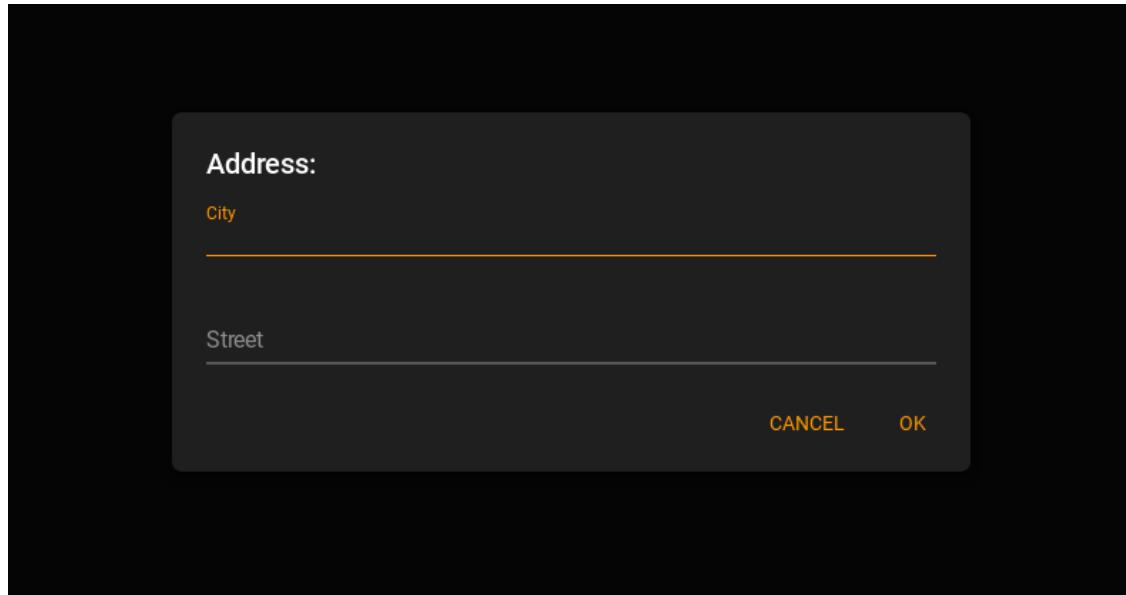

`content_cls` is an `ObjectProperty` and defaults to `'None'`.

#### `md_bg_color`

Background color in the (r, g, b, a) or string format.

`md_bg_color` is an `ColorProperty` and defaults to `None`.

---

```

update_width(self, *args)
update_height(self, *args)
update_items(self, items: list)
on_open(self)
    default open event handler.
get_normal_height(self)
edit_padding_for_item(self, instance_item)
create_items(self)
create_buttons(self)

```

### 2.3.48 FileManager


A simple manager for selecting directories and files.

#### Usage

```

path = os.path.expanduser("~/") # path to the directory that will be opened in the file
                                ↵manager
file_manager = MDFileManager(
    exit_manager=self.exit_manager, # function called when the user reaches directory
    ↵tree_root
    select_path=self.select_path, # function called when selecting a file/directory
)
file_manager.show(path)


```

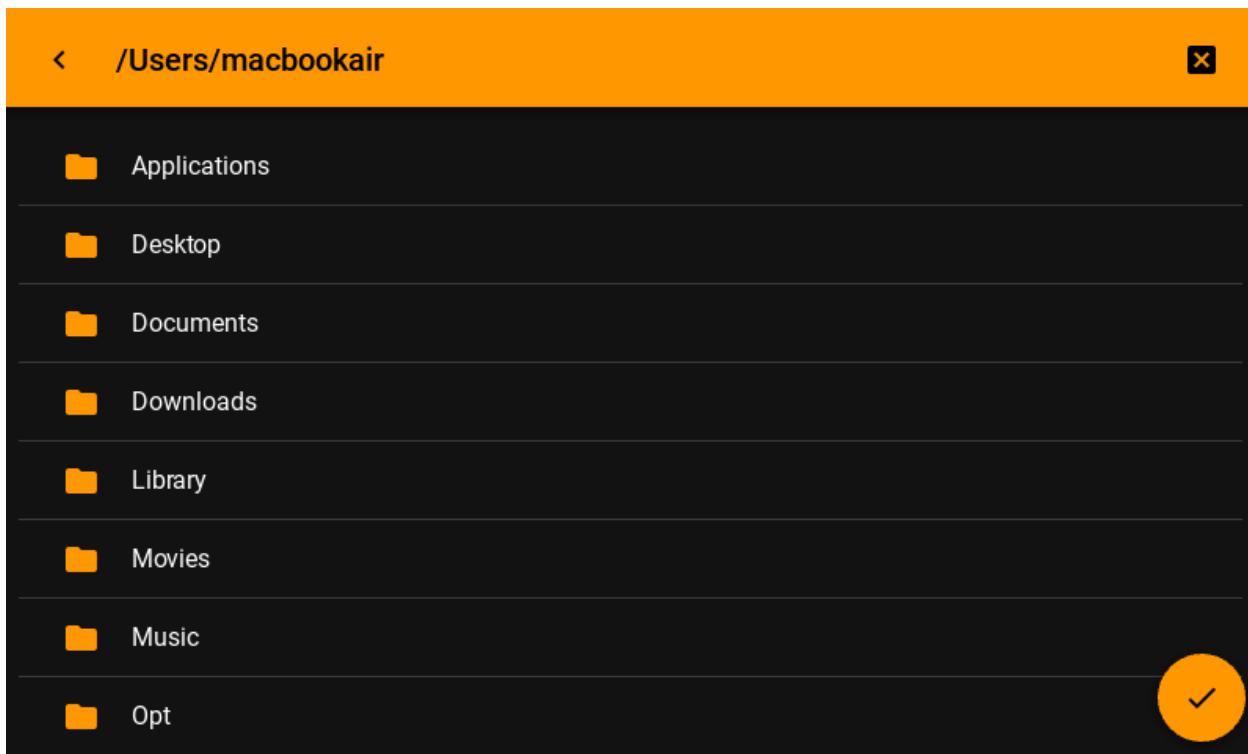

**Warning:** Be careful! To use the '/' path on Android devices, you need special permissions. Therefore, you are likely to get an error.

Or with preview mode:

```
file_manager = MDFileManager(  
    exit_manager=self.exit_manager,  
    select_path=self.select_path,  
    preview=True,  
)
```

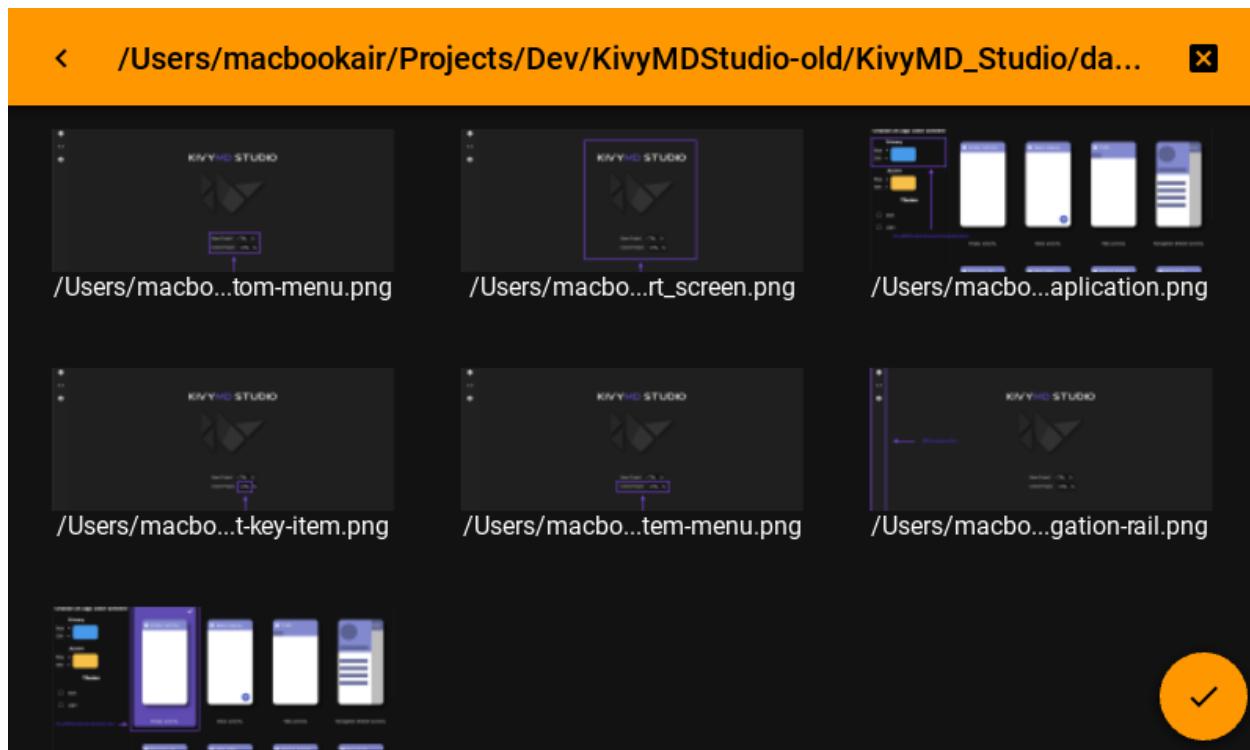

**Warning:** The *preview* mode is intended only for viewing images and will not display other types of files.

## Example

```
import os

from kivy.core.window import Window
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.filemanager import MDFFileManager
from kivymd.toast import toast

KV = '''
MDBBoxLayout:
    orientation: "vertical"

    MDTopAppBar:
        title: "MDFFileManager"
        left_action_items: [["menu", lambda x: None]]
        elevation: 3

    MDFloatLayout:

        MDRoundFlatButton:
```

(continues on next page)

(continued from previous page)

```

        text: "Open manager"
        icon: "folder"
        pos_hint: {"center_x": .5, "center_y": .5}
        on_release: app.file_manager_open()
    ...

class Example(MDApp):
    def __init__(self, **kwargs):
        super().__init__(**kwargs)
        Window.bind(on_keyboard=self.events)
        self.manager_open = False
        self.file_manager = MDFileManager(
            exit_manager=self.exit_manager, select_path=self.select_path
        )

    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return Builder.load_string(KV)

    def file_manager_open(self):
        self.file_manager.show(os.path.expanduser("~/")) # output manager to the screen
        self.manager_open = True

    def select_path(self, path: str):
        ...
        It will be called when you click on the file name
        or the catalog selection button.

        :param path: path to the selected directory or file;
        ...

        self.exit_manager()
        toast(path)

    def exit_manager(self, *args):
        '''Called when the user reaches the root of the directory tree.'''

        self.manager_open = False
        self.file_manager.close()

    def events(self, instance, keyboard, keycode, text, modifiers):
        '''Called when buttons are pressed on the mobile device.'''

        if keyboard in (1001, 27):
            if self.manager_open:
                self.file_manager.back()
        return True


Example().run()

```

New in version 1.0.0.

Added a feature that allows you to show the available disks first, then the files contained in them. Works correctly on: *Windows, Linux, OSX, Android*. Not tested on *iOS*.

```
def file_manager_open(self):
    self.file_manager.show_disks()
```

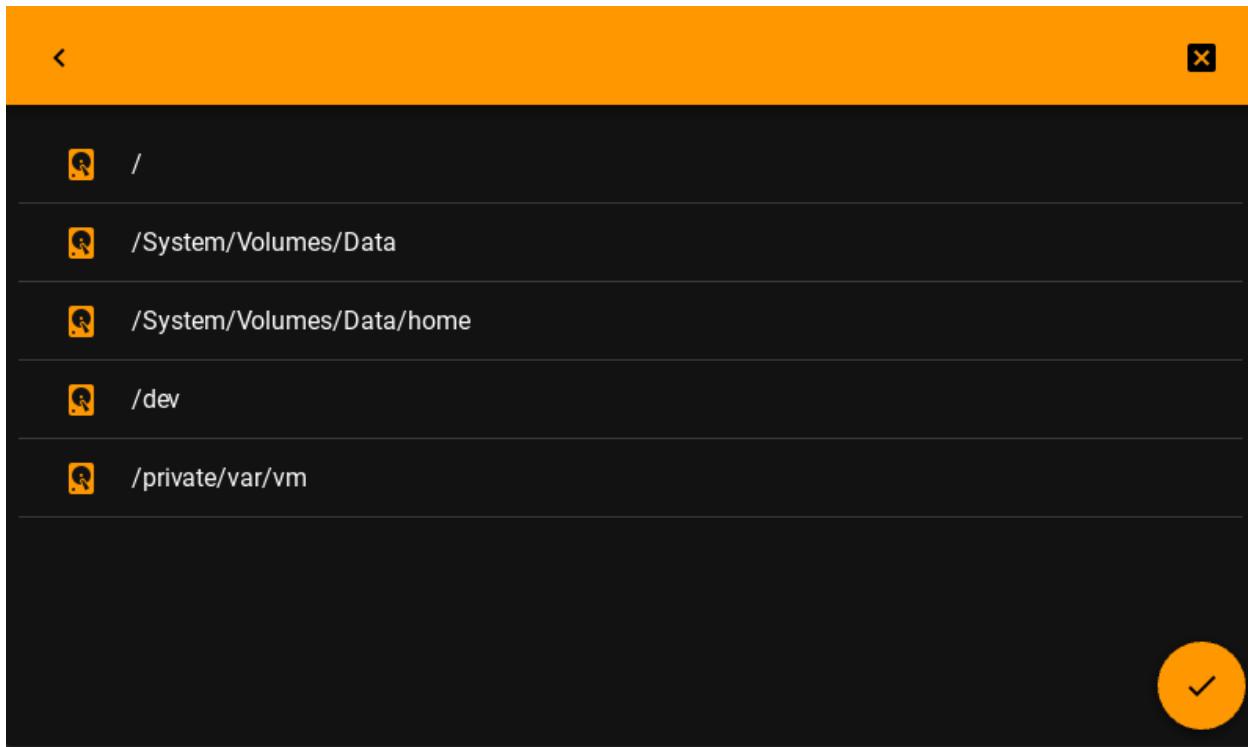

## API - kivymd.uix.filemanager.filemanager

```
class kivymd.uix.filemanager.filemanager.MDFFileManager(*args, **kwargs)
```

Implements a modal dialog with a file manager.

For more information, see in the [MDRelativeLayout](#) class documentation.

### Events

#### *on\_pre\_open:*

Called before the MDFFileManager is opened.

#### *on\_open:*

Called when the MDFFileManager is opened.

#### *on\_pre\_dismiss:*

Called before the MDFFileManager is closed.

#### *on\_dismiss:*

Called when the MDFFileManager is closed.

### icon

Icon that will be used on the directory selection button.

Deprecated since version 1.1.0: Use [icon\\_selection\\_button](#) instead.


*icon* is an `StringProperty` and defaults to `check`.

#### **icon\_selection\_button**

Icon that will be used on the directory selection button.

New in version 1.1.0.

```
MDFFileManager(  
    ...  
    icon_selection_button="pencil",  
)
```

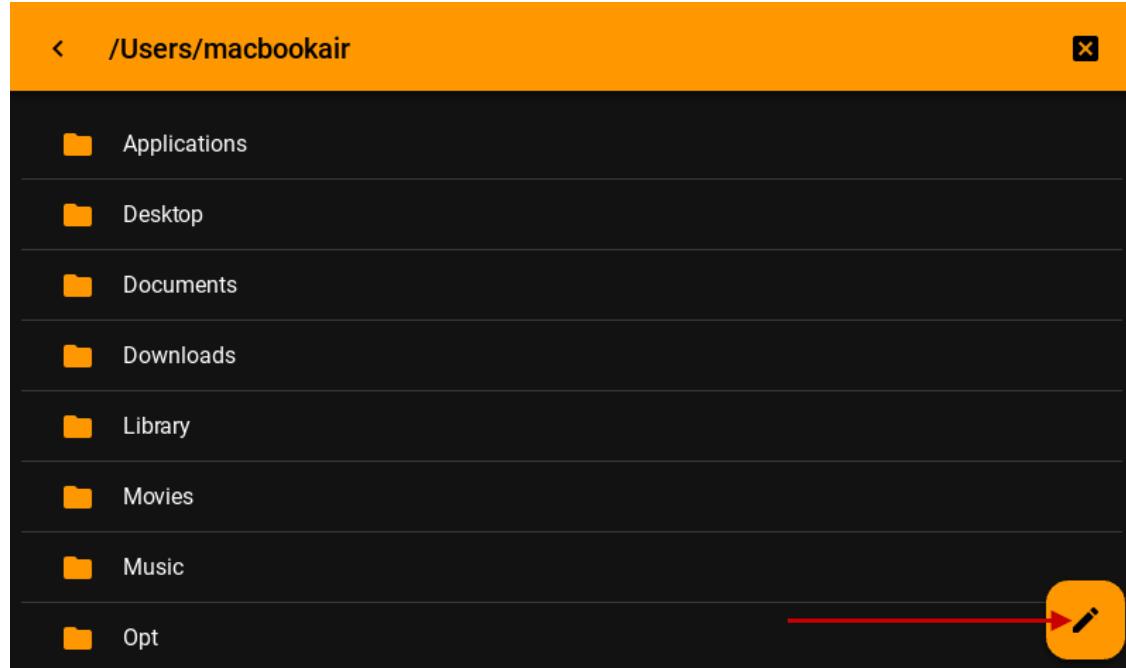


*icon\_selection\_button* is an `StringProperty` and defaults to `check`.

#### **background\_color\_selection\_button**

Background color in (r, g, b, a) or string format of the current directory/path selection button.

New in version 1.1.0.

```
MDFFileManager(  
    ...  
    background_color_selection_button="brown",  
)
```

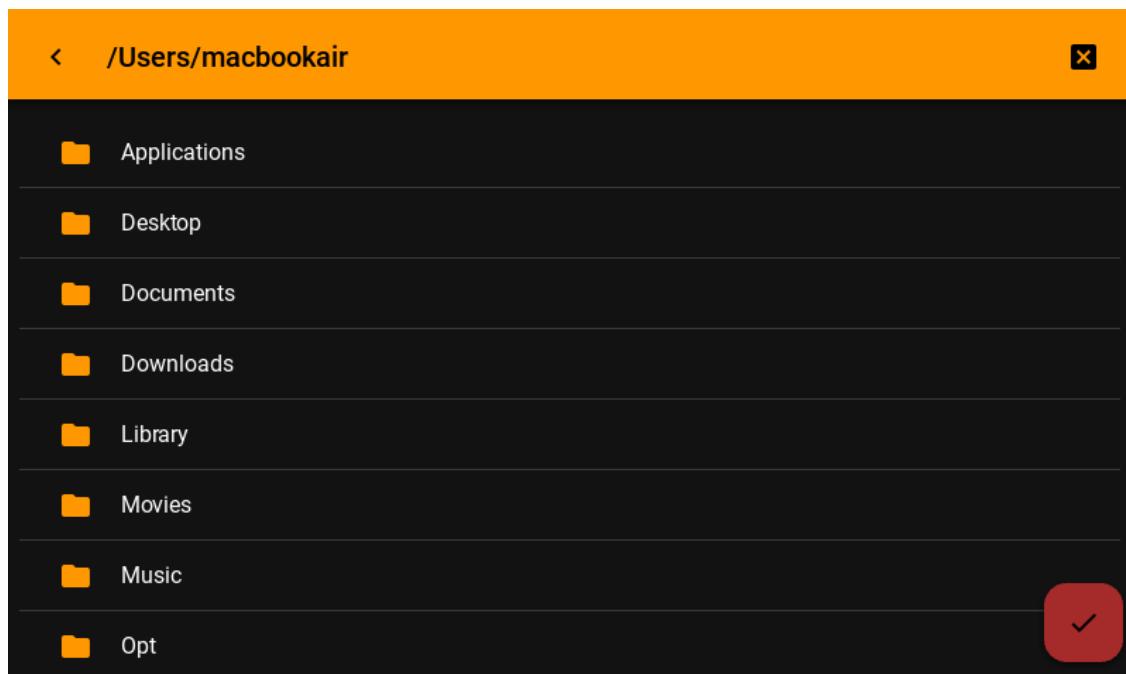


`background_color_selection_button` is an `ColorProperty` and defaults to `None`.

#### **background\_color\_toolbar**

Background color in (r, g, b, a) or string format of the file manager toolbar.

New in version 1.1.0.

```
MDFFileManager(  
    ...  
    background_color_toolbar="brown",  
)
```

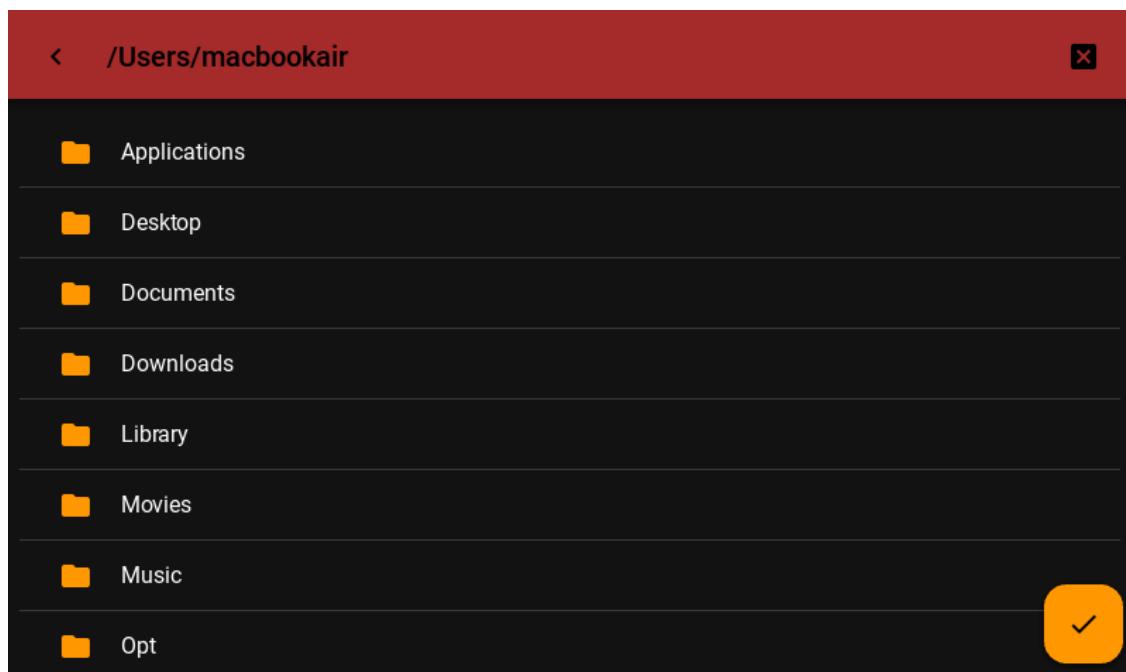


*background\_color\_toolbar* is an `ColorProperty` and defaults to `None`.

#### icon\_folder

Icon that will be used for folder icons when using `preview = True`.

```
MDFFileManager(  
    ...  
    preview=True,  
    icon_folder="path/to/icon.png",  
)
```

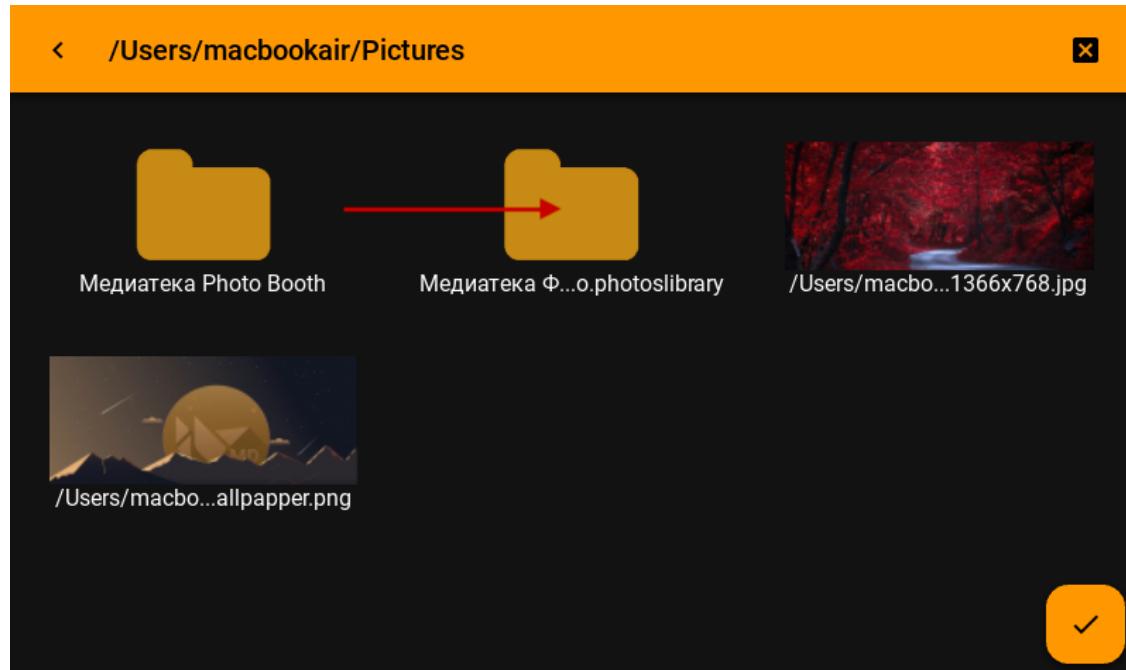


`icon` is an `StringProperty` and defaults to `check`.

#### icon\_color

Color in (r, g, b, a) or string format of the folder icon when the `preview` property is set to False.

New in version 1.1.0.

```
MDFFileManager(  
    ...  
    preview=False,  
    icon_color="brown",  
)
```

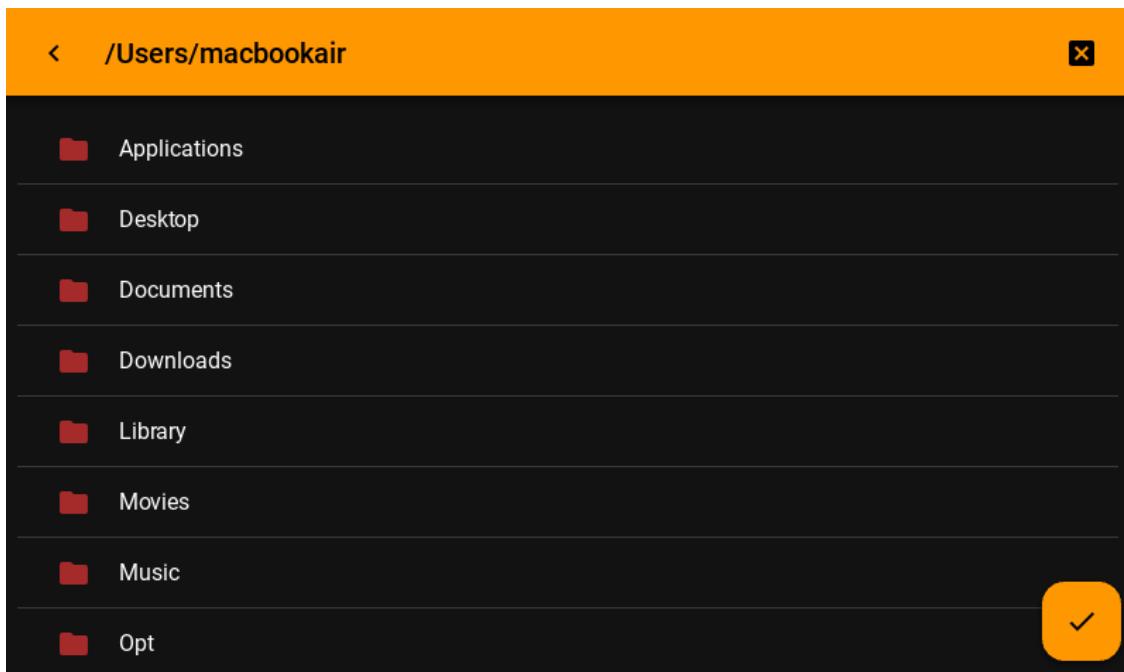

`icon_color` is an `ColorProperty` and defaults to `None`.

#### **exit\_manager**

Function called when the user reaches directory tree root.

`exit_manager` is an `ObjectProperty` and defaults to `lambda x: None`.

#### **select\_path**

Function, called when selecting a file/directory.

`select_path` is an `ObjectProperty` and defaults to `lambda x: None`.

#### **ext**

List of file extensions to be displayed in the manager. For example, `['.py', '.kv']` - will filter out all files, except python scripts and Kv Language.

`ext` is an `ListProperty` and defaults to `[]`.

#### **search**

It can take the values ‘all’ ‘dirs’ ‘files’ - display only directories or only files or both them. By default, it displays folders, and files. Available options are: ‘all’, ‘dirs’, ‘files’.

`search` is an `OptionProperty` and defaults to `all`.

#### **current\_path**

Current directory.

`current_path` is an `StringProperty` and defaults to `os.path.expanduser("~")`.

#### **use\_access**

Show access to files and directories.

`use_access` is an `BooleanProperty` and defaults to `True`.

#### **preview**

Shows only image previews.

`preview` is an `BooleanProperty` and defaults to `False`.

### **show\_hidden\_files**

Shows hidden files.

`show_hidden_files` is an `BooleanProperty` and defaults to `False`.

### **sort\_by**

It can take the values ‘nothing’ ‘name’ ‘date’ ‘size’ ‘type’ - sorts files by option. By default, sort by name. Available options are: ‘*nothing*’, ‘*name*’, ‘*date*’, ‘*size*’, ‘*type*’.

`sort_by` is an `OptionProperty` and defaults to `name`.

### **sort\_by\_desc**

Sort by descending.

`sort_by_desc` is an `BooleanProperty` and defaults to `False`.

### **selector**

It can take the values ‘any’ ‘file’ ‘folder’ ‘multi’ By default, any. Available options are: ‘*any*’, ‘*file*’, ‘*folder*’, ‘*multi*’.

`selector` is an `OptionProperty` and defaults to `any`.

### **selection**

Contains the list of files that are currently selected.

`selection` is a read-only `ListProperty` and defaults to `[]`.

### **selection\_button**

The instance of the directory/path selection button.

New in version 1.1.0.

`selection_button` is a read-only `ObjectProperty` and defaults to `None`.

### **show\_disks(`self`)**

### **show(`self, path: str`)**

Forms the body of a directory tree.

#### **Parameters**

`path` – The path to the directory that will be opened in the file manager.

### **get\_access\_string(`self, path: str`)**

### **get\_content(`self`)**

Returns a list of the type [[Folder List], [file list]].

### **close(`self`)**

Closes the file manager window.

### **select\_dir\_or\_file(`self, path: str, widget: Union[BodyManagerWithPreview, Factory.BodyManager]`)**

Called by tap on the name of the directory or file.

### **back(`self`)**

Returning to the branch down in the directory tree.

### **select\_directory\_on\_press\_button(`self, *args`)**

Called when a click on a floating button.

### **on\_icon(`self, instance_file_manager, icon_name: str`)**

Called when the `icon` property is changed.

**on\_background\_color\_toolbar**(*self, instance\_file\_manager, color: Union[str, list]*)

Called when the *background\_color\_toolbar* property is changed.

**on\_pre\_open**(*self, \*args*)

Default pre-open event handler.

New in version 1.1.0.

**on\_open**(*self, \*args*)

Default open event handler.

New in version 1.1.0.

**on\_pre\_dismiss**(*self, \*args*)

Default pre-dismiss event handler.


New in version 1.1.0.

**on\_dismiss**(*self, \*args*)

Default dismiss event handler.

New in version 1.1.0.

### 2.3.49 DropdownItem



#### Usage

```
from kivy.lang import Builder

from kivymd.app import MDApp

KV = '''
MDScreen

    MDDropDownItem:
        id: drop_item
        pos_hint: {'center_x': .5, 'center_y': .5}
        text: 'Item'
        on_release: print("Press item")
    ...

class Test(MDApp):
```

(continues on next page)

(continued from previous page)

```
def __init__(self, **kwargs):
    super().__init__(**kwargs)
    self.screen = Builder.load_string(KV)

def build(self):
    return self.screen

Test().run()
```

**See also:**

Work with the class MDDropdownMenu see here

**API - kivymd.uix.dropdownitem.dropdownitem**

**class kivymd.uix.dropdownitem.dropdownitem.MDDropDownItem(\*args, \*\*kwargs)**

Implements the creation and addition of child widgets as declarative programming style.

**text**

Text item.

*text* is a **StringProperty** and defaults to ''.

**current\_item**

Current name item.

*current\_item* is a **StringProperty** and defaults to ''.

**font\_size**

Item font size.

*font\_size* is a **NumericProperty** and defaults to '16sp'.

**on\_text(self, instance\_drop\_down\_item, text\_item: str)****set\_item(self, name\_item: str)**

Sets new text for an item.

### 2.3.50 Transition

**A set of classes for implementing transitions between application screens.**

New in version 1.0.0.

## Changing transitions

You have multiple transitions available by default, such as:

- **MDFadeSlideTransition**

state one: the new screen closes the previous screen by lifting from the bottom of the screen and changing from transparent to non-transparent;

state two: the current screen goes down to the bottom of the screen, passing from a non-transparent state to a transparent one, thus opening the previous screen;

---

**Note:** You cannot control the direction of a slide using the direction attribute.

---

### API - kivymd.uix.transition.transition

#### class kivymd.uix.transition.transition.MDTransitionBase

TransitionBase is used to animate 2 screens within the [MDScreenManager](#).

For more information, see in the [TransitionBase](#) class documentation.

##### **start(self, instance\_screen\_manager: MDScreenManager)**

(internal) Starts the transition. This is automatically called by the ScreenManager.

##### **animated\_hero\_in(self)**

Animates the flight of heroes from screen A to screen B.

##### **animated\_hero\_out(self)**

Animates the flight of heroes from screen B to screen A.

##### **on\_complete(self)**

Override method. See :attr:`kivy.uix.screenmanager.TransitionBase.on\_complete`.

#### class kivymd.uix.transition.transition.MDSwapTransition(\*\*kwargs)

Swap transition that looks like iOS transition when a new window appears on the screen.

#### class kivymd.uix.transition.transition.MDSlideTransition

Slide Transition, can be used to show a new screen from any direction: left, right, up or down.

#### class kivymd.uix.transition.transition.MDFadeSlideTransition

Slide Transition, can be used to show a new screen from any direction: left, right, up or down.

##### **start(self, instance\_screen\_manager: MDScreenManager)**

(internal) Starts the transition. This is automatically called by the ScreenManager.


##### **on\_progress(self, progression: float)**

### 2.3.51 BottomNavigation

See also:

Material Design 2 spec, Bottom navigation and Material Design 3 spec, Bottom navigation

**Bottom navigation bars allow movement between primary destinations in an app:**

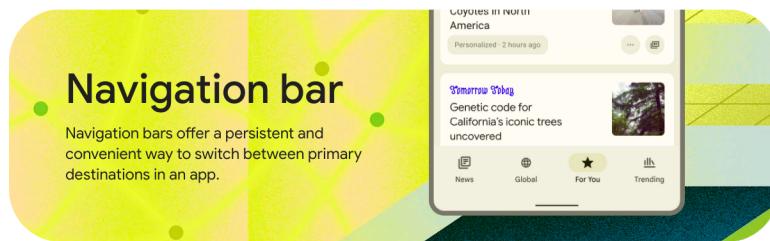

#### Usage

```
<Root>

MDBottomNavigation:

MDBottomNavigationItem:
    name: "screen 1"

    YourContent:

MDBottomNavigationItem:
    name: "screen 2"

    YourContent:

MDBottomNavigationItem:
    name: "screen 3"

    YourContent:
```

For ease of understanding, this code works like this:

```
<Root>

ScreenManager:

Screen:
    name: "screen 1"

    YourContent:

Screen:
```

(continues on next page)

(continued from previous page)

```
name: "screen 2"
```

YourContent:

Screen:

```
name: "screen 3"
```

YourContent:

## Example

Declarative KV style

```
from kivy.lang import Builder

from kivymd.app import MDApp

class Test(MDApp):

    def build(self):
        self.theme_cls.material_style = "M3"
        self.theme_cls.theme_style = "Dark"
        return Builder.load_string(
            '''

MDScreen:

    MDBottomNavigation:
        #panel_color: "#eeeeaea"
        selected_color_background: "orange"
        text_color_active: "lightgrey"

        MDBottomNavigationItem:
            name: 'screen 1'
            text: 'Mail'
            icon: 'gmail'
            badge_icon: "numeric-10"

            MDLabel:
                text: 'Mail'
                halign: 'center'

        MDBottomNavigationItem:
            name: 'screen 2'
            text: 'Twitter'
            icon: 'twitter'
            badge_icon: "numeric-5"

            MDLabel:
                text: 'Twitter'
                halign: 'center'
```

(continues on next page)

(continued from previous page)

```

        MDBottomNavigationItem:
            name: 'screen 3'
            text: 'LinkedIN'
            icon: 'linkedin'

        MDLabel:
            text: 'LinkedIN'
            halign: 'center'
    ...
)

```

Test().run()

Declarative python style

```

from kivymd.app import MDApp
from kivymd.uix.bottomnavigation import MDBottomNavigation, MDBottomNavigationItem
from kivymd.uix.label import MDLabel
from kivymd.uix.screen import MDScreen


class Test(MDApp):
    def build(self):
        self.theme_cls.material_style = "M3"
        self.theme_cls.theme_style = "Dark"
        return (
            MDScreen(
                MDBottomNavigation(
                    MDBottomNavigationItem(
                        MDLabel(
                            text='Mail',
                            halign='center',
                        ),
                        name='screen 1',
                        text='Mail',
                        icon='gmail',
                        badge_icon="numeric-10",
                    ),
                    MDBottomNavigationItem(
                        MDLabel(
                            text='Twitter',
                            halign='center',
                        ),
                        name='screen 1',
                        text='Twitter',
                        icon='twitter',
                        badge_icon="numeric-10",
                    ),
                    MDBottomNavigationItem(
                        MDLabel(

```

(continues on next page)

(continued from previous page)

```

        text='LinkedIN',
        halign='center',
    ),
    name='screen 1',
    text='LinkedIN',
    icon='linkedin',
    badge_icon="numeric-10",
),
selected_color_background="orange",
text_color_active="lightgrey",
)
)
)
)
)

Test().run()

```

`MDBottomNavigationItem` provides the following events for use:

```

__events__ = (
    "on_tab_touch_down",
    "on_tab_touch_move",
    "on_tab_touch_up",
    "on_tab_press",
    "on_tab_release",
)

```

Root:

MDBottomNavigation:

```

MDBottomNavigationItem:
    on_tab_touch_down: print("on_tab_touch_down")
    on_tab_touch_move: print("on_tab_touch_move")
    on_tab_touch_up: print("on_tab_touch_up")
    on_tab_press: print("on_tab_press")
    on_tab_release: print("on_tab_release")

```

YourContent:

## How to automatically switch a tab?

Use method `switch_tab` which takes as argument the name of the tab you want to switch to.

### Use custom icon

`MDBottomNavigation:`

`MDBottomNavigationItem:`  
`icon: "icon.png"`



### API - `kivymd.uix.bottomnavigation.bottomnavigation`

`class kivymd.uix.bottomnavigation.bottomnavigation.MDTab(*args, **kwargs)`

A tab is simply a screen with meta information that defines the content that goes in the tab header.

#### `text`

Tab header text.

`text` is an `StringProperty` and defaults to ''.

#### `icon`

Tab header icon.

`icon` is an `StringProperty` and defaults to '`checkbox-blank-circle`'.

#### `badge_icon`

Tab header badge icon.

New in version 1.0.0.

`badge_icon` is an `StringProperty` and defaults to ''.

`on_tab_touch_down(self, *args)`

`on_tab_touch_move(self, *args)`

`on_tab_touch_up(self, *args)`

`on_tab_press(self, *args)`

`on_tab_release(self, *args)`

`class kivymd.uix.bottomnavigation.bottomnavigation.MDBottomNavigationItem(*args, **kwargs)`

A tab is simply a screen with meta information that defines the content that goes in the tab header.

#### `header`

`header` is an `MDBottomNavigationHeader` and defaults to `None`.

`animate_header(self, bottom_navigation_object, bottom_navigation_header_object)`

```
on_tab_press(self, *args)
    Called when clicking on a panel item.

on_disabled(self, instance_bottom_navigation_item, disabled_value: bool)

on_leave(self, *args)

class kivymd.uix.bottomnavigation.bottomnavigation.TabbedPanelBase(**kwargs)
    A class that contains all variables a TabPannel must have. It is here so I (zingballyhoo) don't get mad about the TabbedPannels not being DRY.

current
    Current tab name.

    current is an StringProperty and defaults to None.

previous_tab
    previous_tab is an MDTab and defaults to None.

panel_color
    Panel color of bottom navigation.

    panel_color is an ColorProperty and defaults to None.

tabs

class kivymd.uix.bottomnavigation.bottomnavigation.MDBottomNavigation(*args, **kwargs)
    A bottom navigation that is implemented by delegating all items to a ScreenManager.
```

**Events****on\_switch\_tabs**

Called when switching tabs. Returns the object of the tab to be opened.

New in version 1.0.0.

**transition**

Transition animation of bottom navigation screen manager.

New in version 1.1.0.

*transition* is an `ObjectProperty` and defaults to *FadeTransition*.

**transition\_duration**

Duration animation of bottom navigation screen manager.

New in version 1.1.0.

*transition\_duration* is an `NumericProperty` and defaults to *0.2*.

**text\_color\_normal**

Text color of the label when it is not selected.

**MDBottomNavigation:**

```
text_color_normal: 1, 0, 1, 1
```



Mail



Discord




LinkedIn

*text\_color\_normal* is an `ColorProperty` and defaults to *[1, 1, 1, 1]*.

### **text\_color\_active**

Text color of the label when it is selected.

```
MDBottomNavigation:  
    text_color_active: 0, 0, 0, 1
```

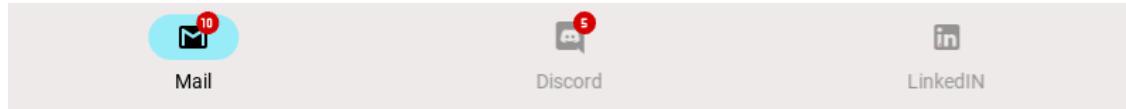


`text_color_active` is an `ColorProperty` and defaults to `[1, 1, 1, 1]`.

### **use\_text**

Use text for `MDBottomNavigationItem` or not. If True, the `MDBottomNavigation` panel height will be reduced by the text height.

New in version 1.0.0.

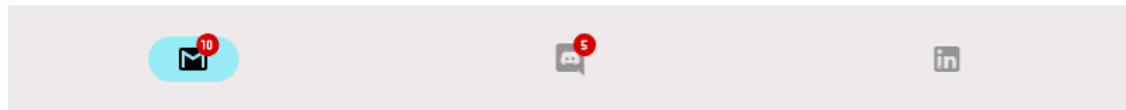


`use_text` is an `BooleanProperty` and defaults to `True`.

### **selected\_color\_background**

The background color of the highlighted item when using Material Design v3.

New in version 1.0.0.

```
MDBottomNavigation:  
    selected_color_background: 0, 0, 1, .4
```

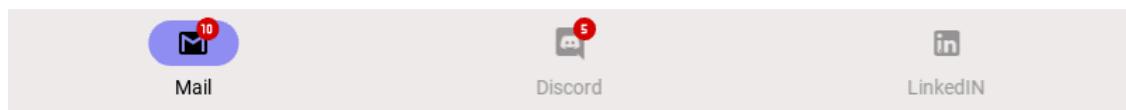


`selected_color_background` is an `ColorProperty` and defaults to `None`.

### **font\_name**

Font name of the label.

New in version 1.0.0.

```
MDBottomNavigation:  
    font_name: "path/to/font.ttf"
```

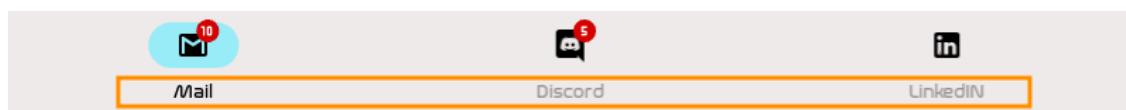

`font_name` is an `StringProperty` and defaults to ‘`Roboto`’.

### **first\_widget**

`first_widget` is an `MDBottomNavigationItem` and defaults to `None`.

### **tab\_header**

`tab_header` is an `MDBottomNavigationHeader` and defaults to `None`.

**set\_bars\_color**

If *True* the background color of the navigation bar will be set automatically according to the current color of the toolbar.

New in version 1.0.0.

`set_bars_color` is an `BooleanProperty` and defaults to *False*.

**widget\_index**

`set_status_bar_color(self, interval: Union[int, float])`

`switch_tab(self, name_tab)`

Switching the tab by name.

`refresh_tabs(self, *args)`

Refresh all tabs.

`on_font_name(self, instance_bottom_navigation, font_name: str)`

`on_selected_color_background(self, instance_bottom_navigation, color: list)`

`on_use_text(self, instance_bottom_navigation, use_text_value: bool)`

`on_text_color_normal(self, instance_bottom_navigation, color: list)`

`on_text_color_active(self, instance_bottom_navigation, color: list)`

`on_switch_tabs(self, bottom_navigation_item, name_tab: str)`

Called when switching tabs. Returns the object of the tab to be opened.

`on_size(self, *args)`

`on_resize(self, instance: Union[WindowSDL, None] = None, width: Union[int, None] = None, do_again: bool = True)`

Called when the application window is resized.

`add_widget(self, widget, **kwargs)`

Add a new widget as a child of this widget.

**Parameters****widget: Widget**

Widget to add to our list of children.

**index: int, defaults to 0**

Index to insert the widget in the list. Notice that the default of 0 means the widget is inserted at the beginning of the list and will thus be drawn on top of other sibling widgets. For a full discussion of the index and widget hierarchy, please see the Widgets Programming Guide.

New in version 1.0.5.

**canvas: str, defaults to None**

Canvas to add widget's canvas to. Can be 'before', 'after' or None for the default canvas.

New in version 1.9.0.

```
>>> from kivy.uix.button import Button
>>> from kivy.uix.slider import Slider
>>> root = Widget()
>>> root.add_widget(Button())
>>> slider = Slider()
>>> root.add_widget(slider)
```

### `remove_widget(self, widget)`

Remove a widget from the children of this widget.

#### Parameters

##### `widget: Widget`

Widget to remove from our children list.

```
>>> from kivy.uix.button import Button
>>> root = Widget()
>>> button = Button()
>>> root.add_widget(button)
>>> root.remove_widget(button)
```

## 2.3.52 Swiper

### Usage

#### MDSwiper:

##### MDSwiperItem:

##### MDSwiperItem:

##### MDSwiperItem:

### Example

```
from kivymd.app import MDApp
from kivy.lang.builder import Builder

kv = '''
<MySwiper@MDSwiperItem>

    FitImage:
        source: "guitar.png"
        radius: [20,]
```

#### MDScreen:

(continues on next page)

(continued from previous page)

```

MDTopAppBar:
    id: toolbar
    title: "MDSwiper"
    elevation: 4
    pos_hint: {"top": 1}

MDSwiper:
    size_hint_y: None
    height: root.height - toolbar.height - dp(40)
    y: root.height - self.height - toolbar.height - dp(20)

MySwiper:
    MySwiper:
        MySwiper:
            MySwiper:
                MySwiper:
                    MySwiper:
                    ...
                    ...

class Main(MDApp):
    def build(self):
        return Builder.load_string(kv)

Main().run()

```

**Warning:** The width of `MDSwiperItem` is adjusted automatically. Consider changing that by `width_mult`.

**Warning:** The width of `MDSwiper` is automatically adjusted according to the width of the window.

**MDSwiper provides the following events for use:**

```

__events__ = (
    "on_swipe",
    "on_pre_swipe",
    "on_overswipe_right",
    "on_overswipe_left",
    "on_swipe_left",
    "on_swipe_right"
)

```

```
MDSwiper:  
    on_swipe: print("on_swipe")  
    on_preSwipe: print("on_pre_swipe")  
    on_overswipe_right: print("on_overswipe_right")  
    on_overswipe_left: print("on_overswipe_left")  
    on_swipe_left: print("on_swipe_left")  
    on_swipe_right: print("on_swipe_right")
```

## Example

```
from kivy.lang.builder import Builder  
  
from kivymd.app import MDApp  
  
kv = '''  
<MagicButton@MagicBehavior+MDIconButton>  
  
<MySwiper@MDSwiperItem>  
  
    RelativeLayout:  
  
        FitImage:  
            source: "guitar.png"  
            radius: [20,]  
  
        MDBBoxLayout:  
            adaptive_height: True  
            spacing: "12dp"  
  
        MagicButton:  
            id: icon  
            icon: "weather-sunny"  
            user_font_size: "56sp"  
            opposite_colors: True  
  
        MDLabel:  
            text: "MDLabel"  
            font_style: "H5"  
            size_hint_y: None  
            height: self.texture_size[1]  
            pos_hint: {"center_y": .5}  
            opposite_colors: True  
  
    MDScreen:  
  
        MDTopAppBar:  
            id: toolbar  
            title: "MDSwiper"  
            elevation: 4
```

(continues on next page)

(continued from previous page)

```

pos_hint: {"top": 1}

MDSwiper:
    size_hint_y: None
    height: root.height - toolbar.height - dp(40)
    y: root.height - self.height - toolbar.height - dp(20)
    on_swipe: self.get_current_item().ids.icon.shake()

    MySwiper:
        MySwiper:
            MySwiper:
                MySwiper:
                    MySwiper:
                    ...
                    ...

class Main(MDApp):
    def build(self):
        return Builder.load_string(kv)

Main().run()

```

## How to automatically switch a SwiperItem?

Use method `set_current` which takes the index of `MDSwiperItem` as argument.

### Example

```

MDSwiper:
    id: swiper

    MDSwiperItem: # First widget with index 0

    MDSwiperItem: # Second widget with index 1

MDRaisedButton:
    text: "Go to Second"
    on_release: swiper.set_current(1)

```

## API - kivymd.uix.swiper.swiper

`class kivymd.uix.swiper.swiper.MDSwiperItem(*args, **kwargs)`

`MDSwiperItem` is a BoxLayout but it's size is adjusted automatically.

`class kivymd.uix.swiper.swiper.MDSwiper(*args, **kwargs)`

ScrollView class. For more information, see in the `ScrollView` class documentation.

### `items_spacing`

The space between each `MDSwiperItem`.

`items_spacing` is an `NumericProperty` and defaults to `20dp`.

### `transition_duration`

Duration of switching between `MDSwiperItem`.

`transition_duration` is an `NumericProperty` and defaults to `0.2`.

### `size_duration`

Duration of changing the size of `MDSwiperItem`.

`transition_duration` is an `NumericProperty` and defaults to `0.2`.

### `size_transition`

The type of animation used for changing the size of `MDSwiperItem`.

`size_transition` is an `StringProperty` and defaults to `out_quad`.

### `swipe_transition`

The type of animation used for swiping.

`swipe_transition` is an `StringProperty` and defaults to `out_quad`.

### `swipe_distance`

Distance to move before swiping the `MDSwiperItem`.

`swipe_distance` is an `NumericProperty` and defaults to `70dp`.

### `width_mult`

This number is multiplied by `items_spacing` x2 and then subtracted from the width of window to specify the width of `MDSwiperItem`. So by decreasing the `width_mult` the width of `MDSwiperItem` increases and vice versa.

`width_mult` is an `NumericProperty` and defaults to `3`.

### `swipe_on_scroll`

Wheter to swipe on mouse wheel scrolling or not.

`swipe_on_scroll` is an `BooleanProperty` and defaults to `True`.

### `add_widget(self, widget, index=0)`

Add a new widget as a child of this widget.

#### Parameters

##### `widget: Widget`

Widget to add to our list of children.

##### `index: int, defaults to 0`

Index to insert the widget in the list. Notice that the default of 0 means the widget is inserted at the beginning of the list and will thus be drawn on top of other sibling

widgets. For a full discussion of the index and widget hierarchy, please see the Widgets Programming Guide.

New in version 1.0.5.

**canvas: str, defaults to None**

Canvas to add widget's canvas to. Can be 'before', 'after' or None for the default canvas.

New in version 1.9.0.

```
>>> from kivy.uix.button import Button
>>> from kivy.uix.slider import Slider
>>> root = Widget()
>>> root.add_widget(Button())
>>> slider = Slider()
>>> root.add_widget(slider)
```

**remove\_widget(self, widget)**

Remove a widget from the children of this widget.

**Parameters**

**widget: Widget**

Widget to remove from our children list.

```
>>> from kivy.uix.button import Button
>>> root = Widget()
>>> button = Button()
>>> root.add_widget(button)
>>> root.remove_widget(button)
```

**set\_current(self, index)**

Switch to given *MDSwiperItem* index.

**get\_current\_index(self)**

Returns the current *MDSwiperItem* index.

**get\_current\_item(self)**

Returns the current *MDSwiperItem* instance.

**get\_items(self)**

Returns the list of *MDSwiperItem* children.

---

**Note:** Use *get\_items()* to get the list of children instead of *MDSwiper.children*.

---

**on\_swipe(self)**

**on\_pre\_swipe(self)**

**on\_overswipe\_right(self)**

**on\_overswipe\_left(self)**

**on\_swipe\_left(self)**

**on\_swipe\_right(self)**

```
swipe_left(self)
swipe_right(self)
on_scroll_start(self, touch, check_children=True)
on_touch_down(self, touch)
```

Receive a touch down event.

#### Parameters

`touch: MotionEvent class`

Touch received. The touch is in parent coordinates. See `relativelayout` for a discussion on coordinate systems.

#### Returns

`bool` If True, the dispatching of the touch event will stop. If False, the event will continue to be dispatched to the rest of the widget tree.

```
on_touch_up(self, touch)
```

Receive a touch up event. The touch is in parent coordinates.


See `on_touch_down()` for more information.

### 2.3.53 List

#### See also:

Material Design spec, Lists

**Lists are continuous, vertical indexes of text or images.**

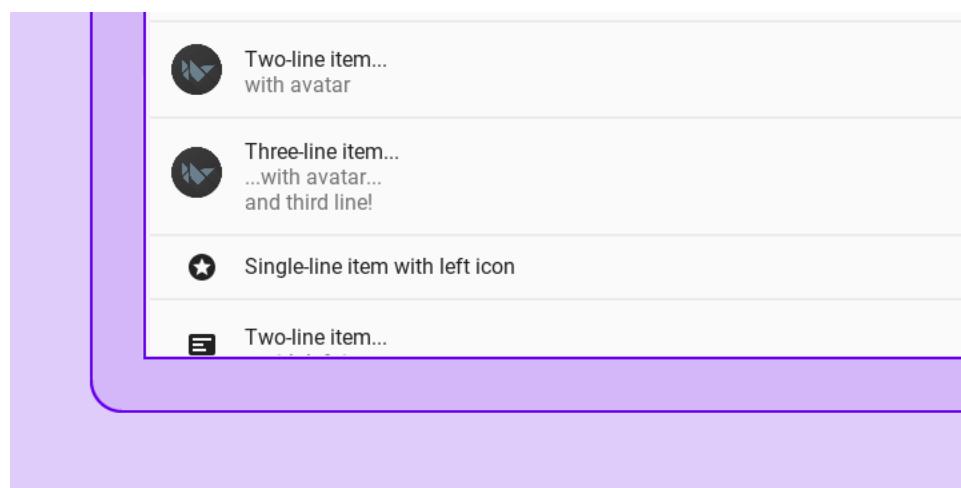

The class `MDList` in combination with a `BaseListItem` like `OneLineListItem` will create a list that expands as items are added to it, working nicely with Kivy's `ScrollView`.

Due to the variety in sizes and controls in the *Material Design spec*, this module suffers from a certain level of complexity to keep the widgets compliant, flexible and performant.

For this *KivyMD* provides list items that try to cover the most common usecases, when those are insufficient, there's a base class called *BaseListItem* which you can use to create your own list items. This documentation will only cover the provided ones, for custom implementations please refer to this module's source code.

*KivyMD* provides the following list items classes for use:

### Text only ListItems

- *OneLineListItem*
- *TwoLineListItem*
- *ThreeLineListItem*

### ListItems with widget containers

These widgets will take other widgets that inherit from *ILeftBody*, *ILeftBodyTouch*, *IRightBody* or *IRightBodyTouch* and put them in their corresponding container.

As the name implies, *ILeftBody* and *IRightBody* will signal that the widget goes into the left or right container, respectively.

*ILeftBodyTouch* and *IRightBodyTouch* do the same thing, except these widgets will also receive touch events that occur within their surfaces.

*KivyMD* provides base classes such as *ImageLeftWidget*, *ImageRightWidget*, *IconRightWidget*, *IconLeftWidget*, based on the above classes.

### Allows the use of items with custom widgets on the left.

- *OneLineAvatarListItem*
- *TwoLineAvatarListItem*
- *ThreeLineAvatarListItem*
- *OneLineIconListItem*
- *TwoLineIconListItem*
- *ThreeLineIconListItem*

### It allows the use of elements with custom widgets on the left and the right.

- *OneLineAvatarIconListItem*
- *TwoLineAvatarIconListItem*
- *ThreeLineAvatarIconListItem*
- *OneLineRightIconListItem*
- *TwoLineRightIconListItem*
- *ThreeLineRightIconListItem*

## Usage

Declarative KV style

```
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.list import OneLineListItem

KV = '''
MDScrollView:

    MDList:
        id: container
'''


class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        return Builder.load_string(KV)

    def on_start(self):
        for i in range(20):
            self.root.ids.container.add_widget(
                OneLineListItem(text=f"Single-line item {i}")
            )

Example().run()
```

Declarative python style

```
from kivymd.app import MDApp
from kivymd.uix.list import OneLineListItem


class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        return (
            MDScrollView(
                MDList(
                    id="container"
                )
            )
        )

    def on_start(self):
        for i in range(20):
            self.root.ids.container.add_widget(
                OneLineListItem(text=f"Single-line item {i}")
            )
```

(continues on next page)

(continued from previous page)

Example().run()

## Events of List

Declarative KV style

```
from kivy.lang import Builder

from kivymd.app import MDApp

KV = """
MDScrollView:

    MDList:

        OneLineAvatarIconListItem:
            on_release: print("Click!")

            IconLeftWidget:
                icon: "github"

        OneLineAvatarIconListItem:
            on_release: print("Click 2!")

            IconLeftWidget:
                icon: "gitlab"
    ...
    ...

class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        return Builder.load_string(KV)
```

Example().run()

Declarative python style

```
from kivymd.app import MDApp
from kivymd.uix.scrollview import MDScrollView
from kivymd.uix.list import MDList, OneLineAvatarIconListItem, IconLeftWidget


class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        return (
            MDScrollView(
```

(continues on next page)


(continued from previous page)

```
MDList(  
    OneLineAvatarIconListItem(  
        IconLeftWidget(  
            icon="github"  
        ),  
        on_release=lambda x: print("Click!")  
    ),  
    OneLineAvatarIconListItem(  
        IconLeftWidget(  
            icon="gitlab"  
        ),  
        on_release=lambda x: print("Click 2!")  
    ),  
)  
)  
)
```

Example().run()

### OneLineListItem


```
OneLineListItem:  
    text: "Single-line item"
```

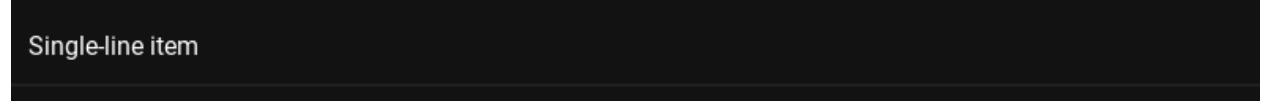

A dark-themed screenshot showing a single-line item in a list. The item consists of a single line of text: "Single-line item".

### TwoLineListItem

```
TwoLineListItem:  
    text: "Two-line item"  
    secondary_text: "Secondary text here"
```

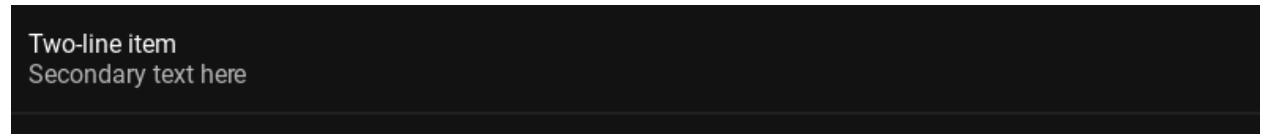

A dark-themed screenshot showing a two-line item in a list. The item has two lines of text: "Two-line item" on the first line and "Secondary text here" on the second line.

### ThreeLineListItem

```
ThreeLineListItem:
    text: "Three-line item"
    secondary_text: "This is a multi-line label where you can"
    tertiary_text: "fit more text than usual"
```

Three-line item  
 This is a multi-line label where you can  
 fit more text than usual

### OneLineAvatarListItem

Declarative KV style

```
OneLineAvatarListItem:
    text: "Single-line item with avatar"

    ImageLeftWidget:
        source: "kivymd/images/logo/kivymd-icon-256.png"
```

Declarative python style

```
OneLineAvatarListItem(
    ImageLeftWidget(
        source="kivymd/images/logo/kivymd-icon-256.png"
    ),
    text="Single-line item with avatar",
)
```



Single-line item with avatar

### TwoLineAvatarListItem

Declarative KV style

```
TwoLineAvatarListItem:
    text: "Two-line item with avatar"
    secondary_text: "Secondary text here"

    ImageLeftWidget:
        source: "kivymd/images/logo/kivymd-icon-256.png"
```

Declarative python style

```
OneLineAvatarListItem(
    ImageLeftWidget(
```

(continues on next page)

(continued from previous page)

```
        source="kivymd/images/logo/kivymd-icon-256.png"
    ),
    text="Single-line item with avatar",
    secondary_text: "Secondary text here",
)
```



Single-line item with avatar  
Secondary text here

### ThreeLineAvatarListItem

Declarative KV style

```
ThreeLineAvatarListItem:
    text: "Three-line item with avatar"
    secondary_text: "Secondary text here"
    tertiary_text: "fit more text than usual"

ImageLeftWidget:
    source: "kivymd/images/logo/kivymd-icon-256.png"
```

Declarative python style

```
OneLineAvatarListItem(
    ImageLeftWidget(
        source="kivymd/images/logo/kivymd-icon-256.png"
    ),
    text="Single-line item with avatar",
    secondary_text: "Secondary text here",
    tertiary_text: "fit more text than usual"
)
```



Three-line item with avatar  
Secondary text here  
fit more text than usual

### OneLineRightIconListItem

Declarative KV style

```
OneLineRightIconListItem:
    text: "Single-line item with avatar"

ImageRightWidget:
    source: "kivymd/images/logo/kivymd-icon-256.png"
```

Declarative python style

```
OneLineRightIconListItem(
    ImageRightWidget(
        source="kivymd/images/logo/kivymd-icon-256.png"
    ),
    text="Single-line item with avatar",
)
```

Single-line item with avatar



### TwoLineRightIconListItem

Declarative KV style

```
TwoLineRightIconListItem:
    text: "Single-line item with avatar"
    secondary_text: "Secondary text here"

    ImageRightWidget:
        source: "kivymd/images/logo/kivymd-icon-256.png"
```

Declarative python style

```
TwoLineRightIconListItem(
    ImageRightWidget(
        source="kivymd/images/logo/kivymd-icon-256.png"
    ),
    text="Single-line item with avatar",
    secondary_text: "Secondary text here",
)
```

Single-line item with avatar  
Secondary text here



### ThreeLineRightIconListItem

Declarative KV style

```
ThreeLineRightIconListItem:
    text: "Single-line item with avatar"
    secondary_text: "Secondary text here"
    tertiary_text: "fit more text than usual"

    ImageRightWidget:
        source: "kivymd/images/logo/kivymd-icon-256.png"
```

Declarative python style

```
ThreeLineRightIconListItem(  
    ImageRightWidget(  
        source="kivymd/images/logo/kivymd-icon-256.png"  
    ),  
    text="Single-line item with avatar",  
    secondary_text: "Secondary text here",  
    tertiary_text: "fit more text than usual",  
)
```

Single-line item with avatar  
Secondary text here  
fit more text than usual



### OneLineIconListItem

Declarative KV style

```
OneLineIconListItem:  
    text: "Single-line item with avatar"  
  
    IconLeftWidget:  
        icon: "language-python"
```

Declarative python style

```
OneLineIconListItem(  
    IconLeftWidget(  
        icon="language-python"  
    ),  
    text="Single-line item with avatar"  
)
```



Single-line item with avatar


### TwoLineIconListItem

Declarative KV style

```
TwoLineIconListItem:  
    text: "Two-line item with avatar"  
    secondary_text: "Secondary text here"  
  
    IconLeftWidget:  
        icon: "language-python"
```

Declarative python style

```
TwoLineIconListItem(
    IconLeftWidget(
        icon="language-python"
    ),
    text="Single-line item with avatar",
    secondary_text: "Secondary text here"
)
```



### ThreeLineIconListItem


Declarative KV style

```
ThreeLineIconListItem:
    text: "Three-line item with avatar"
    secondary_text: "Secondary text here"
    tertiary_text: "fit more text than usual"

IconLeftWidget:
    icon: "language-python"
```

Declarative python style

```
ThreeLineIconListItem(
    IconLeftWidget(
        icon="language-python"
    ),
    text="Single-line item with avatar",
    secondary_text: "Secondary text here",
    tertiary_text: "fit more text than usual",
)
```



### OneLineAvatarIconListItem

Declarative KV style

```
OneLineAvatarIconListItem:
    text: "One-line item with avatar"

IconLeftWidget:
    icon: "plus"
```


(continues on next page)

(continued from previous page)

```
IconRightWidget:  
    icon: "minus"
```

Declarative python style

```
OneLineAvatarIconListItem(  
    IconLeftWidget(  
        icon="plus"  
    ),  
    IconRightWidget(  
        icon="minus"  
    ),  
    text="Single-line item with avatar",  
)
```

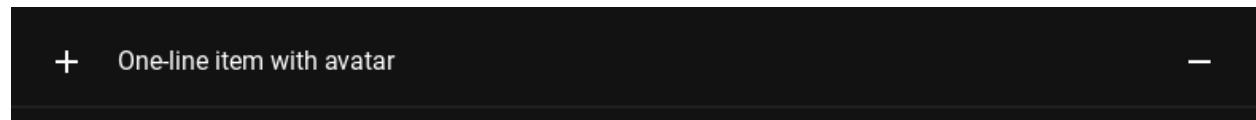

### TwoLineAvatarIconListItem

Declarative KV style

```
TwoLineAvatarIconListItem:  
    text: "Two-line item with avatar"  
    secondary_text: "Secondary text here"  
  
    IconLeftWidget:  
        icon: "plus"  
  
    IconRightWidget:  
        icon: "minus"
```

Declarative python style

```
TwoLineAvatarIconListItem(  
    IconLeftWidget(  
        icon="plus"  
    ),  
    IconRightWidget(  
        icon="minus"  
    ),  
    text="Two-line item with avatar",  
    secondary_text: "Secondary text here",  
)
```



## ThreeLineAvatarIconListItem

Declarative KV style


```
ThreeLineAvatarIconListItem:
    text: "Three-line item with avatar"
    secondary_text: "Secondary text here"
    tertiary_text: "fit more text than usual"

    IconLeftWidget:
        icon: "plus"

    IconRightWidget:
        icon: "minus"
```

Declarative python style

```
ThreeLineAvatarIconListItem(
    IconLeftWidget(
        icon="plus"
    ),
    IconRightWidget(
        icon="minus"
    ),
    text="Single-line item with avatar",
    secondary_text: "Secondary text here",
    tertiary_text: "fit more text than usual",
)
```

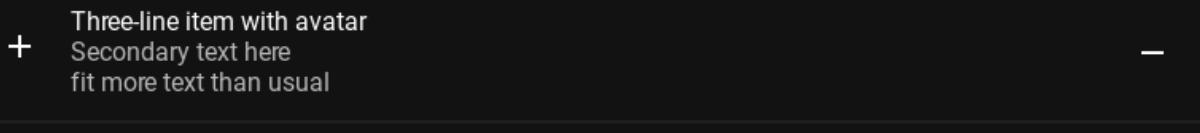

## Custom list item

Declarative KV style

```
from kivy.lang import Builder
from kivy.properties import StringProperty

from kivymd.app import MDApp
from kivymd.uix.list import IRightBodyTouch, OneLineAvatarIconListItem
from kivymd.uix.selectioncontrol import MDCheckbox
from kivymd.icon_definitions import md_icons

KV = '''
<ListItemWithCheckbox>:

    IconLeftWidget:
```

(continues on next page)

(continued from previous page)

```

icon: root.icon

RightCheckbox:

MDScrollView:

    MDList:
        id: scroll
    ...

class ListItemWithCheckbox(OneLineAvatarIconListItem):
    '''Custom list item.'''

    icon = StringProperty("android")

class RightCheckbox(IRightBodyTouch, MDCheckbox):
    '''Custom right container.'''


class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        return Builder.load_string(KV)

    def on_start(self):
        icons = list(md_icons.keys())
        for i in range(30):
            self.root.ids.scroll.add_widget(
                ListItemWithCheckbox(text=f"Item {i}", icon=icons[i])
            )

Example().run()

```

Declarative python style

```

from kivymd.app import MDApp
from kivymd.uix.list import IRightBodyTouch, OneLineAvatarIconListItem
from kivymd.uix.selectioncontrol import MDCheckbox
from kivymd.uix.scrollview import MDScrollView
from kivymd.uix.list import MDList
from kivymd.icon_definitions import md_icons

class RightCheckbox(IRightBodyTouch, MDCheckbox):
    '''Custom right container.'''


class Example(MDApp):

```

(continues on next page)

(continued from previous page)


```

def build(self):
    self.theme_cls.theme_style = "Dark"
    return (
        MDScrollView(
            MDList(
                id="scroll"
            )
        )
    )

def on_start(self):
    icons = list(md_icons.keys())
    for i in range(30):
        self.root.ids.scroll.add_widget(
            OneLineAvatarIconListItem(
                IconLeftWidget(
                    icon=icons[i]
                ),
                RightCheckbox(),
                text=f"Item {i}",
            )
        )
    )

```

Example().run()

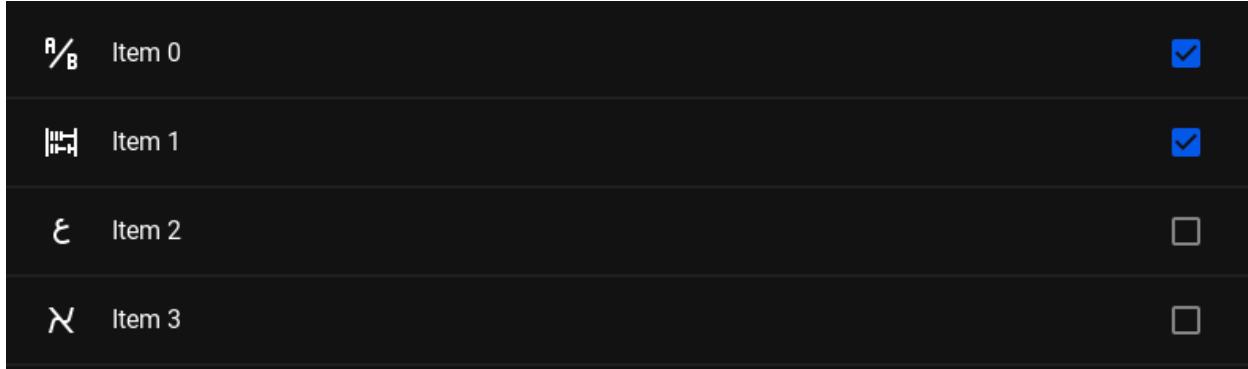

Declarative KV style

```

from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.boxlayout import MDBBoxLayout
from kivymd.uix.list import IRightBodyTouch

KV = '''
OneLineAvatarIconListItem:
    text: "One-line item with avatar"
    on_size:
        self.ids._right_container.width = container.width
        self.ids._right_container.x = container.width

```

(continues on next page)

(continued from previous page)

```

IconLeftWidget:
    icon: "cog"

YourContainer:
    id: container

    MDIconButton:
        icon: "minus"

    MDIconButton:
        icon: "plus"
    ...

class YourContainer(IRightBodyTouch, MDBBoxLayout):
    adaptive_width = True

class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        return Builder.load_string(KV)

Example().run()

```

Declarative python style

```

from kivymd.app import MDApp
from kivymd.uix.boxlayout import MDBBoxLayout
from kivymd.uix.list import IRightBodyTouch
from kivymd.uix.button import MDIconButton
from kivymd.uix.list import OneLineAvatarIconListItem, IconLeftWidget


class YourContainer(IRightBodyTouch, MDBBoxLayout):
    adaptive_width = True

class Example(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        return (
            OneLineAvatarIconListItem(
                IconLeftWidget(
                    icon="cog"
                ),
                YourContainer(
                    MDIconButton(
                        icon="minus"
                    ),
                )
            )
        )

```

(continues on next page)

(continued from previous page)


```

        MDIconButton(
            icon="plus"
        ),
        id="container"
    ),
    text="One-line item with avatar"
)
)

def on_start(self):
    container = self.root.ids.container
    self.root.ids._right_container.width = container.width
    container.x = container.width

```

Example().run()

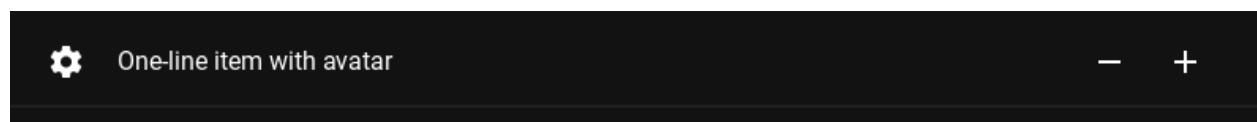

## Behavior

When using the *AvatarListItem* and *IconListItem* classes, when an icon is clicked, the event of this icon is triggered:

Declarative KV style

```

OneLineIconListItem:
    text: "Single-line item with icon"

    IconLeftWidget:
        icon: "language-python"

```

Declarative python style

```

OneLineIconListItem(
    IconLeftWidget(
        icon="language-python"
    ),
    text="Single-line item with avatar",
)

```

You can disable the icon event using the *WithoutTouch* classes:

Declarative KV style

```

OneLineIconListItem:
    text: "Single-line item with icon"

    IconLeftWidgetWithoutTouch:
        icon: "language-python"

```

Declarative python style

```
OneLineIconListItem(  
    IconLeftWidgetWithoutTouch(  
        icon="language-python"  
    ),  
    text="Single-line item with avatar",  
)
```

## API - kivymd.uix.list.list

**class kivymd.uix.list.list.MDList(\*args, \*\*kwargs)**

ListItem container. Best used in conjunction with a `kivy.uixScrollView`.

When adding (or removing) a widget, it will resize itself to fit its children, plus top and bottom paddings as described by the *MD* spec.

**class kivymd.uix.list.list.BaseListItem(\*args, \*\*kwargs)**

Base class to all ListItems. Not supposed to be instantiated on its own.

### **text**

Text shown in the first line.

`text` is a `StringProperty` and defaults to ''.

### **text\_color**

Text color in (r, g, b, a) or string format used if `theme_text_color` is set to 'Custom'.

`text_color` is a `ColorProperty` and defaults to `None`.

### **font\_style**

Text font style. See `font-definitions` for more information.

`font_style` is a `StringProperty` and defaults to 'Subtitle1'.

### **theme\_text\_color**

The name of the color scheme for the primary text.

`theme_text_color` is a `StringProperty` and defaults to 'Primary'.

### **secondary\_text**

Text shown in the second line.

`secondary_text` is a `StringProperty` and defaults to ''.

### **tertiary\_text**

The text is displayed on the third line.

`tertiary_text` is a `StringProperty` and defaults to ''.

### **secondary\_text\_color**

Text color in (r, g, b, a) or string format used for secondary text if `secondary_theme_text_color` is set to 'Custom'.

`secondary_text_color` is a `ColorProperty` and defaults to `None`.

**tertiary\_text\_color**

Text color in (r, g, b, a) or string format used for tertiary text if `tertiary_theme_text_color` is set to ‘Custom’.

`tertiary_text_color` is a `ColorProperty` and defaults to `None`.

**secondary\_theme\_text\_color**

The name of the color scheme for for the secondary text.

`secondary_theme_text_color` is a `StringProperty` and defaults to ‘Secondary’.

**tertiary\_theme\_text\_color**

The name of the color scheme for for the tertiary text.

`tertiary_theme_text_color` is a `StringProperty` and defaults to ‘Secondary’.

**secondary\_font\_style**

Font style for secondary line. See `font-definitions` for more information.

`secondary_font_style` is a `StringProperty` and defaults to ‘`Body1`’.

**tertiary\_font\_style**

Font style for tertiary line. See `font-definitions` for more information.

`tertiary_font_style` is a `StringProperty` and defaults to ‘`Body1`’.

**divider**

Divider mode. Available options are: ‘`Full`’, ‘`Inset`’ and default to ‘`Full`’.

`divider` is a `OptionProperty` and defaults to ‘`Full`’.

**divider\_color**

Divider color in (r, g, b, a) or string format.

New in version 1.0.0.

`divider_color` is a `ColorProperty` and defaults to `None`.

**bg\_color**

Background color for list item in (r, g, b, a) or string format.

`bg_color` is a `ColorProperty` and defaults to `None`.

**radius**

Canvas radius.

```
# Top left corner slice.
MDBoxLayout:
    md_bg_color: app.theme_cls.primary_color
    radius: [25, 0, 0, 0]
```

`radius` is an `VariableListProperty` and defaults to `[0, 0, 0, 0]`.

**on\_touch\_down(self, touch)**

Receive a touch down event.

**Parameters****touch: MotionEvent class**

Touch received. The touch is in parent coordinates. See `relativelayout` for a discussion on coordinate systems.

**Returns**

bool If True, the dispatching of the touch event will stop. If False, the event will continue to be dispatched to the rest of the widget tree.

**on\_touch\_move(self, touch, \*args)**

Receive a touch move event. The touch is in parent coordinates.

See [on\\_touch\\_down\(\)](#) for more information.

**on\_touch\_up(self, touch)**

Receive a touch up event. The touch is in parent coordinates.

See [on\\_touch\\_down\(\)](#) for more information.

**propagate\_touch\_to\_touchable\_widgets(self, touch, touch\_event, \*args)**

**add\_widget(self, widget)**

Add a new widget as a child of this widget.

**Parameters**

**widget: Widget**

Widget to add to our list of children.

**index: int, defaults to 0**

Index to insert the widget in the list. Notice that the default of 0 means the widget is inserted at the beginning of the list and will thus be drawn on top of other sibling widgets. For a full discussion of the index and widget hierarchy, please see the Widgets Programming Guide.

New in version 1.0.5.

**canvas: str, defaults to None**

Canvas to add widget's canvas to. Can be 'before', 'after' or None for the default canvas.

New in version 1.9.0.

```
>>> from kivy.uix.button import Button
>>> from kivy.uix.slider import Slider
>>> root = Widget()
>>> root.add_widget(Button())
>>> slider = Slider()
>>> root.add_widget(slider)
```

**remove\_widget(self, widget)**

Remove a widget from the children of this widget.

**Parameters**

**widget: Widget**

Widget to remove from our children list.

```
>>> from kivy.uix.button import Button
>>> root = Widget()
>>> button = Button()
>>> root.add_widget(button)
>>> root.remove_widget(button)
```

**class kivymd.uix.list.list.ILeftBodyTouch**

Same as ILeftBody, but allows the widget to receive touch events instead of triggering the ListItem's ripple effect.

**class kivymd.uix.list.list.IRightBodyTouch**

Same as IRightBody, but allows the widget to receive touch events instead of triggering the ListItem's ripple effect

**class kivymd.uix.list.list.OneLineListItem(\*args, \*\*kwargs)**

A one line list item.

**class kivymd.uix.list.list.TwoLineListItem(\*\*kwargs)**

A two line list item.

**class kivymd.uix.list.list.ThreeLineListItem(\*args, \*\*kwargs)**

A three line list item.

**class kivymd.uix.list.list.OneLineAvatarListItem(\*args, \*\*kwargs)**

Base class to all ListItems. Not supposed to be instantiated on its own.

**class kivymd.uix.list.list.TwoLineAvatarListItem(\*args, \*\*kwargs)**

Base class to all ListItems. Not supposed to be instantiated on its own.

**class kivymd.uix.list.list.ThreeLineAvatarListItem(\*args, \*\*kwargs)**

A three line list item.

**class kivymd.uix.list.list.OneLineIconListItem(\*args, \*\*kwargs)**

A one line list item.

**class kivymd.uix.list.list.TwoLineIconListItem(\*args, \*\*kwargs)**

A one line list item.

**class kivymd.uix.list.list.ThreeLineIconListItem(\*args, \*\*kwargs)**

A three line list item.

**class kivymd.uix.list.list.OneLineRightIconListItem(\*args, \*\*kwargs)**

A one line list item.

**class kivymd.uix.list.list.TwoLineRightIconListItem(\*\*kwargs)**

A one line list item.

**class kivymd.uix.list.list.ThreeLineRightIconListItem(\*\*kwargs)**

A three line list item.

**class kivymd.uix.list.list.OneLineAvatarIconListItem(\*args, \*\*kwargs)**

Base class to all ListItems. Not supposed to be instantiated on its own.

**class kivymd.uix.list.list.TwoLineAvatarIconListItem(\*args, \*\*kwargs)**

Base class to all ListItems. Not supposed to be instantiated on its own.

**class kivymd.uix.list.list.ThreeLineAvatarIconListItem(\*args, \*\*kwargs)**

A three line list item.

**class kivymd.uix.list.list.ImageLeftWidget(\*\*kwargs)**

Class implements a circular ripple effect.

**class kivymd.uix.list.list.ImageLeftWidgetWithoutTouch(\*\*kwargs)**

New in version 1.0.0.

```
class kivymd.uix.list.list.ImageRightWidget(**kwargs)
    Class implements a circular ripple effect.

class kivymd.uix.list.list.ImageRightWidgetWithoutTouch(**kwargs)
    New in version 1.0.0.

class kivymd.uix.list.list.IconRightWidget(*args, **kwargs)
    Same as IRightBody, but allows the widget to receive touch events instead of triggering the ListItem's ripple effect

    pos_hint

class kivymd.uix.list.list.IconRightWidgetWithoutTouch(*args, **kwargs)
    New in version 1.0.0.

    pos_hint

class kivymd.uix.list.list.IconLeftWidget(*args, **kwargs)
    Same as ILeftBody, but allows the widget to receive touch events instead of triggering the ListItem's ripple effect.

    pos_hint

class kivymd.uix.list.list.IconLeftWidgetWithoutTouch(*args, **kwargs)
    New in version 1.0.0.

    pos_hint


class kivymd.uix.list.list.CheckboxLeftWidget(**kwargs)
    Same as ILeftBody, but allows the widget to receive touch events instead of triggering the ListItem's ripple effect.
```

## 2.3.54 Chip

See also:

[Material Design spec, Chips](#)

**Chips** are compact elements that represent an input, attribute, or action.

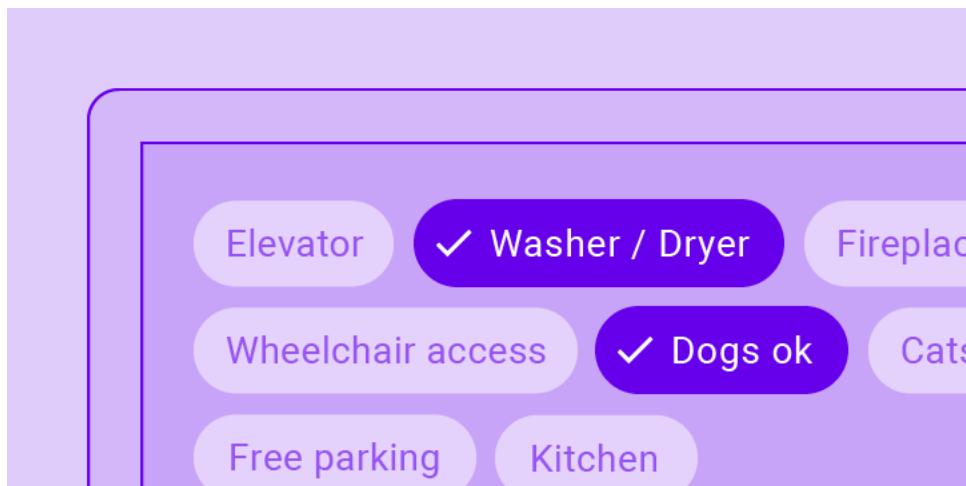


## Usage

```
from kivy.lang import Builder
from kivymd.app import MDApp
KV = '''
MDScreen:
    MDChip:
        text: "Portland"
        pos_hint: {"center_x": .5, "center_y": .5}
        on_release: app.on_release_chip(self)
'''

class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)


    def on_release_chip(self, instance_check):
        print(instance_check)

Test().run()
```




### Use with right icon

```
MDChip:  
    text: "Portland"  
    icon_right: "close-circle-outline"
```

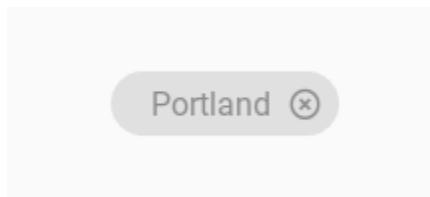


### Use with left icon

```
MDChip:  
    text: "Portland"  
    icon_left: "map-marker"
```

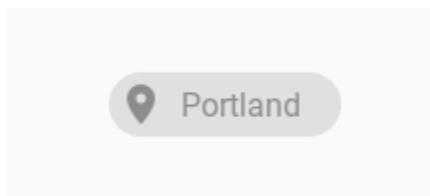


### Use with custom left icon

```
MDChip:  
    text: "Portland"  
    icon_left: "avatar.png"
```

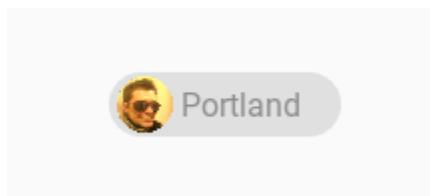


### Use with left and right icon

```
MDChip:  
    text: "Portland"  
    icon_left: "avatar.png"  
    icon_right: "close-circle-outline"
```

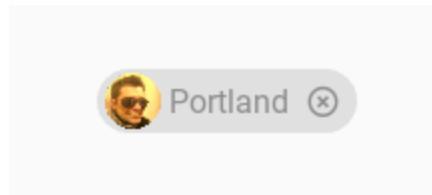


### Use with outline

```
MDChip:  
    text: "Portland"  
    icon_left: "avatar.png"  
    icon_right: "close-circle-outline"  
    line_color: app.theme_cls.disabled_hint_text_color
```

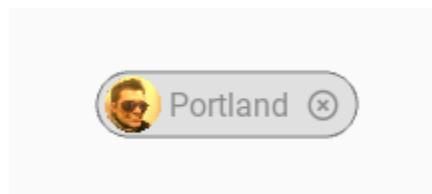


### Use with custom color

```
MDChip:  
    text: "Portland"  
    icon_left: "avatar.png"  
    icon_right: "close-circle-outline"  
    line_color: app.theme_cls.disabled_hint_text_color  
    md_bg_color: 1, 0, 0, .5
```

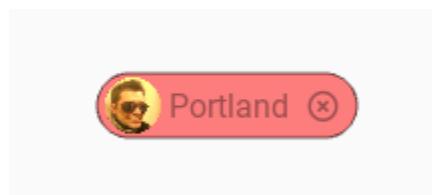

### Use with elevation

```
MDChip:  
    text: "Portland"  
    icon_left: "avatar.png"  
    icon_right: "close-circle-outline"  
    line_color: app.theme_cls.disabled_hint_text_color  
    md_bg_color: 1, 0, 0, .5  
    elevation: 4
```

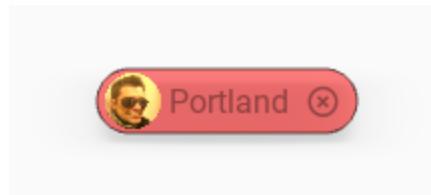

## Behavior

Long press on the chip, it will be marked. When you click on the marked chip, the mark will be removed:

## Examples

### Multiple choose

Selecting a single choice chip automatically deselects all other chips in the set.

```
from kivy.animation import Animation
from kivy.lang import Builder

from kivymd.uix.screen import MDScreen
from kivymd.uix.chip import MDChip
from kivymd.app import MDApp

KV = '''
<MyScreen>

MDBBoxLayout:
    orientation: "vertical"
    adaptive_size: True
    spacing: "12dp"
    padding: "56dp"
    pos_hint: {"center_x": .5, "center_y": .5}

    MDLabel:
        text: "Multiple choice"
        bold: True
        font_style: "H5"
        adaptive_size: True

    MDBBoxLayout:
        id: chip_box
        adaptive_size: True
        spacing: "8dp"

        MyChip:
            text: "Elevator"
            on_press: if self.active: root.remove_marks_all_chips()

        MyChip:
```

(continues on next page)

(continued from previous page)

```

        text: "Washer / Dryer"
        on_press: if self.active: root.remove_marks_all_chips()

    MyChip:
        text: "Fireplace"
        on_press: if self.active: root.remove_marks_all_chips()

ScreenManager:
    MyScreen:
    ...

class MyChip(MDChip):
    icon_check_color = (0, 0, 0, 1)
    text_color = (0, 0, 0, 0.5)
    _no_ripple_effect = True

    def __init__(self, **kwargs):
        super().__init__(**kwargs)
        self.bind(active=self.set_chip_bg_color)
        self.bind(active=self.set_chip_text_color)

    def set_chip_bg_color(self, instance_chip, active_value: int):
        """
        Will be called every time the chip is activated/deactivated.
        Sets the background color of the chip.
        """

        self.md_bg_color = (
            (0, 0, 0, 0.4)
            if active_value
            else (
                self.theme_cls.bg_darkest
                if self.theme_cls.theme_style == "Light"
                else (
                    self.theme_cls.bg_light
                    if not self.disabled
                    else self.theme_cls.disabled_hint_text_color
                )
            )
        )

    def set_chip_text_color(self, instance_chip, active_value: int):
        Animation(
            color=(0, 0, 0, 1) if active_value else (0, 0, 0, 0.5), d=0.2
        ).start(self.ids.label)

class MyScreen(MDScreen):
    def remove_marks_all_chips(self):

```

(continues on next page)

(continued from previous page)

```

for instance_chip in self.ids.chip_box.children:
    if instance_chip.active:
        instance_chip.active = False

class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

Test().run()

```

### Only choose

Only one chip will be selected.

```

KV = '''
<MyScreen>

[...]

MDBBoxLayout:
    id: chip_box
    adaptive_size: True
    spacing: "8dp"

    MyChip:
        text: "Elevator"
        on_active: if self.active: root.removes_marks_all_chips(self)

    MyChip:
        text: "Washer / Dryer"
        on_active: if self.active: root.removes_marks_all_chips(self)

    MyChip:
        text: "Fireplace"
        on_active: if self.active: root.removes_marks_all_chips(self)

[...]
'''


class MyScreen(MDScreen):
    def removes_marks_all_chips(self, selected_instance_chip):
        for instance_chip in self.ids.chip_box.children:
            if instance_chip != selected_instance_chip:
                instance_chip.active = False

```

**API - kivymd.uix.chip.chip****class kivymd.uix.chip.chip.MDChip(\*\*kwargs)**

Box layout class.

For more information, see in the [BoxLayout](#) class documentation.**text**

Chip text.

*text* is an [StringProperty](#) and defaults to ''.**icon\_left**

Chip left icon.

New in version 1.0.0.

*icon\_left* is an [StringProperty](#) and defaults to ''.**icon\_right**

Chip right icon.

New in version 1.0.0.

*icon\_right* is an [StringProperty](#) and defaults to ''.**text\_color**

Chip's text color in (r, g, b, a) or string format.

*text\_color* is an [ColorProperty](#) and defaults to *None*.**icon\_right\_color**

Chip's right icon color in (r, g, b, a) or string format.

New in version 1.0.0.

*icon\_right\_color* is an [ColorProperty](#) and defaults to *None*.**icon\_left\_color**

Chip's left icon color in (r, g, b, a) or string format.

New in version 1.0.0.

*icon\_left\_color* is an [ColorProperty](#) and defaults to *None*.**icon\_check\_color**

Chip's check icon color in (r, g, b, a) or string format.

New in version 1.0.0.

*icon\_check\_color* is an [ColorProperty](#) and defaults to *None*.**active**

Whether the check is marked or not.

New in version 1.0.0.

*active* is an [BooleanProperty](#) and defaults to *False*.**on\_long\_touch(self, \*args)**

Called when the widget is pressed for a long time.

**on\_active(self, instance\_check, active\_value: bool)**

```
do_animation_check(self, md_bg_color: list, scale_value: int)
on_press(self, *args)
```

## 2.4 Controllers

### 2.4.1 WindowController

New in version 1.0.0.

Modules and classes that implement useful methods for getting information about the state of the current application window.

#### Controlling the resizing direction of the application window

```
# When resizing the application window, the direction of change will be
# printed - 'left' or 'right'.

from kivymd.app import MDApp
from kivymd.uix.controllers import WindowController
from kivymd.uix.screen import MDScreen

class MyScreen(MDScreen, WindowController):
    def on_width(self, *args):
        print(self.get_window_width_resizing_direction())

class Test(MDApp):
    def build(self):
        return MyScreen()

Test().run()
```

#### API - kivymd.uix.controllers.windowcontroller

```
class kivymd.uix.controllers.windowcontroller.WindowController
```

```
on_size(self, instance, size: list)
```

Called when the application screen size changes.

```
get_real_device_type(self)
```

Returns the device type - ‘mobile’, ‘tablet’ or ‘desktop’.

```
get_window_width_resizing_direction(self)
```

Return window width resizing direction - ‘left’ or ‘right’.

## 2.5 Behaviors

### 2.5.1 Touch

**Provides easy access to events.**

The following events are available:

- on\_long\_touch
- on\_double\_tap
- on\_triple\_tap

#### Usage

```
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.behaviors import TouchBehavior
from kivymd.uix.button import MDRaisedButton

KV = '''
Screen:

    MyButton:
        text: "PRESS ME"
        pos_hint: {"center_x": .5, "center_y": .5}
'''


class MyButton(MDRaisedButton, TouchBehavior):
    def on_long_touch(self, *args):
        print("<on_long_touch> event")

    def on_double_tap(self, *args):
        print("<on_double_tap> event")

    def on_triple_tap(self, *args):
        print("<on_triple_tap> event")


class MainApp(MDApp):
    def build(self):
        return Builder.load_string(KV)

MainApp().run()
```

**API - kivymd.uix.behaviors.touch\_behavior**

```
class kivymd.uix.behaviors.touch_behavior.TouchBehavior(**kwargs)

duration_long_touch
    Time for a long touch.

    duration_long_touch is an NumericProperty and defaults to 0.4.

create_clock(self, widget, touch, *args)

delete_clock(self, widget, touch, *args)

on_long_touch(self, touch, *args)
    Called when the widget is pressed for a long time.

on_double_tap(self, touch, *args)
    Called by double clicking on the widget.

on_triple_tap(self, touch, *args)
    Called by triple clicking on the widget.
```

## 2.5.2 Scale

New in version 1.1.0.

Base class for controlling the scale of the widget.

---

**Note:** See [kivy.graphics.Rotate](#) for more information.

---

## Kivy

```
from kivy.animation import Animation
from kivy.lang import Builder
from kivy.properties import NumericProperty
from kivy.uix.button import Button
from kivy.app import App

KV = '''
Screen:

    ScaleButton:
        size_hint: .5, .5
        pos_hint: {"center_x": .5, "center_y": .5}
        on_release: app.change_scale(self)

        canvas.before:
            PushMatrix
            Scale:
```

(continues on next page)

(continued from previous page)

```

        x: self.scale_value_x
        y: self.scale_value_y
        z: self.scale_value_x
        origin: self.center
    canvas.after:
        PopMatrix
    ...

class ScaleButton(Button):
    scale_value_x = NumericProperty(1)
    scale_value_y = NumericProperty(1)
    scale_value_z = NumericProperty(1)

class Test(App):
    def build(self):
        return Builder.load_string(KV)

    def change_scale(self, instance_button: Button) -> None:
        Animation(
            scale_value_x=0.5,
            scale_value_y=0.5,
            scale_value_z=0.5,
            d=0.3,
        ).start(instance_button)

Test().run()

```

## KivyMD

```

from kivy.animation import Animation
from kivy.lang import Builder
from kivy.uix.behaviors import ButtonBehavior

from kivymd.app import MDApp
from kivymd.uix.behaviors import ScaleBehavior
from kivymd.uix.boxlayout import MDBoxLayout

KV = '''
MDScreen:

    ScaleBox:
        size_hint: .5, .5
        pos_hint: {"center_x": .5, "center_y": .5}
        on_release: app.change_scale(self)
        md_bg_color: "red"
'''

```

(continues on next page)

(continued from previous page)

```
class ScaleBox(ButtonBehavior, ScaleBehavior, MDBoxLayout):
    pass

class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

    def change_scale(self, instance_button: ScaleBox) -> None:
        Animation(
            scale_value_x=0.5,
            scale_value_y=0.5,
            scale_value_z=0.5,
            d=0.3,
        ).start(instance_button)

Test().run()
```

#### API - kivymd.uix.behaviors.scale\_behavior

```
class kivymd.uix.behaviors.scale_behavior.ScaleBehavior
```

Base class for controlling the scale of the widget.

##### scale\_value\_x

X-axis value.

*scale\_value\_x* is an `NumericProperty` and defaults to *1*.

##### scale\_value\_y

Y-axis value.

*scale\_value\_y* is an `NumericProperty` and defaults to *1*.

##### scale\_value\_z

Z-axis value.

*scale\_value\_z* is an `NumericProperty` and defaults to *1*.

### 2.5.3 ToggleButton

This behavior must always be inherited after the button's Widget class since it works with the inherited properties of the button class.

example:

```
class MyToggleButtonWidget(MDFlatButton, MDToggleButton):
    # [...]
    pass
```

Declarative KV style

```

from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.behaviors.toggle_behavior import MDToggleButton
from kivymd.uix.button import MDFlatButton

KV = """
MDScreen:

    MDBBoxLayout:
        adaptive_size: True
        spacing: "12dp"
        pos_hint: {"center_x": .5, "center_y": .5}

        MyToggleButton:
            text: "Show ads"
            group: "x"

        MyToggleButton:
            text: "Do not show ads"
            group: "x"

        MyToggleButton:
            text: "Does not matter"
            group: "x"
    """

class MyToggleButton(MDFlatButton, MDToggleButton):
    def __init__(self, *args, **kwargs):
        super().__init__(*args, **kwargs)
        self.background_down = self.theme_cls.primary_color

class Test(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return Builder.load_string(KV)

Test().run()

```

Declarative python style

```

from kivymd.app import MDApp
from kivymd.uix.behaviors.toggle_behavior import MDToggleButton
from kivymd.uix.boxlayout import MDBBoxLayout
from kivymd.uix.button import MDFlatButton
from kivymd.uix.screen import MDScreen

class MyToggleButton(MDFlatButton, MDToggleButton):

```

(continues on next page)

(continued from previous page)

```

def __init__(self, *args, **kwargs):
    super().__init__(*args, **kwargs)
    self.background_down = self.theme_cls.primary_color

class Test(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        self.theme_cls.primary_palette = "Orange"
        return (
            MDScreen(
                MDBBoxLayout(
                    MyToggleButton(
                        text="Show ads",
                        group="x",
                    ),
                    MyToggleButton(
                        text="Do not show ads",
                        group="x",
                    ),
                    MyToggleButton(
                        text="Does not matter",
                        group="x",
                    ),
                    adaptive_size=True,
                    spacing="12dp",
                    pos_hint={"center_x": .5, "center_y": .5},
                ),
            )
        )
Test().run()

```

You can inherit the `MyToggleButton` class only from the following classes

- MDRaisedButton
- MDFlatButton
- MDRectangleFlatButton
- MDRectangleFlatIconButton
- MDRoundFlatButton
- MDRoundFlatIconButton
- MDFillRoundFlatButton
- MDFillRoundFlatIconButton

**API - kivymd.uix.behaviors.toggle\_behavior**

```
class kivymd.uix.behaviors.toggle_behavior.MDToggleButton(**kwargs)
```

This `mixin` class provides `togglebutton` behavior. Please see the `togglebutton behaviors` module documentation for more information.

New in version 1.8.0.

**background\_normal**

Color of the button in `rgba` format for the ‘normal’ state.

`background_normal` is a `ColorProperty` and is defaults to `None`.

**background\_down**

Color of the button in `rgba` format for the ‘down’ state.

`background_down` is a `ColorProperty` and is defaults to `None`.

**font\_color\_normal**

Color of the font’s button in `rgba` format for the ‘normal’ state.

`font_color_normal` is a `ColorProperty` and is defaults to `None`.

**font\_color\_down**

Color of the font’s button in `rgba` format for the ‘down’ state.

`font_color_down` is a `ColorProperty` and is defaults to `[1, 1, 1, 1]`.

## 2.5.4 Hover

### Changing when the mouse is on the widget and the widget is visible.

To apply hover behavior, you must create a new class that is inherited from the widget to which you apply the behavior and from the `HoverBehavior` class.

In *KV file*:

```
<HoverItem@MDBoxLayout+ThemableBehavior+HoverBehavior>
```

In *python file*:

```
class HoverItem(MDBoxLayout, ThemableBehavior, HoverBehavior):
    '''Custom item implementing hover behavior.'''

```

After creating a class, you must define two methods for it: `HoverBehavior.on_enter` and `HoverBehavior.on_leave`, which will be automatically called when the mouse cursor is over the widget and when the mouse cursor goes beyond the widget.

**Note:** `HoverBehavior` will by default check to see if the current Widget is visible (i.e. not covered by a modal or popup and not a part of a Relative Layout, MDTab or Carousel that is not currently visible etc) and will only issue events if the widget is visible.

To get the legacy behavior that the events are always triggered, you can set `detect_visible` on the Widget to `False`.

```
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.behaviors import HoverBehavior
from kivymd.uix.boxlayout import MDBBoxLayout
from kivymd.theming import ThemableBehavior

KV = """
Screen

    MDBBoxLayout:
        id: box
        pos_hint: {'center_x': .5, 'center_y': .5}
        size_hint: .8, .8
        md_bg_color: app.theme_cls.bg_darkest
    """

class HoverItem(MDBBoxLayout, ThemableBehavior, HoverBehavior):
    '''Custom item implementing hover behavior.'''

    def on_enter(self, *args):
        '''The method will be called when the mouse cursor
        is within the borders of the current widget.'''
        self.md_bg_color = (1, 1, 1, 1)

    def on_leave(self, *args):
        '''The method will be called when the mouse cursor goes beyond
        the borders of the current widget.'''
        self.md_bg_color = self.theme_cls.bg_darkest

class Test(MDApp):
    def build(self):
        self.screen = Builder.load_string(KV)
        for i in range(5):
            self.screen.ids.box.add_widget(HoverItem())
        return self.screen

Test().run()
```

**API - kivymd.uix.behaviors.hover\_behavior**

```
class kivymd.uix.behaviors.hover_behavior.HoverBehavior(**kwargs)
```

**Events****on\_enter**

Called when mouse enters the bbox of the widget AND the widget is visible

**on\_leave**

Called when the mouse exits the widget AND the widget is visible

**hovering**

*True*, if the mouse cursor is within the borders of the widget.

Note that this is set and cleared even if the widget is not visible

*hover* is a `BooleanProperty` and defaults to *False*.

**hover\_visible**

*True* if hovering is *True* AND is the current widget is visible

*hover\_visible* is a `BooleanProperty` and defaults to *False*.

**enter\_point**

Holds the last position where the mouse pointer crossed into the Widget if the Widget is visible and is currently in a hovering state

*enter\_point* is a `ObjectProperty` and defaults to *None*.

**detect\_visible**

Should this widget perform the visibility check?

*detect\_visible* is a `BooleanProperty` and defaults to *True*.

**on\_mouse\_update(self, \*args)****on\_enter(self)**

Called when mouse enters the bbox of the widget AND the widget is visible.

**on\_leave(self)**

Called when the mouse exits the widget AND the widget is visible.

## 2.5.5 Stencil

New in version 1.1.0.

Base class for controlling the stencil instructions of the widget.

---

**Note:** See [Stencil instructions](#) for more information.

---

## Kivy

```
from kivy.lang import Builder
from kivy.app import App

KV = '''
Carousel:

    Button:
        size_hint: .9, .8
        pos_hint: {"center_x": .5, "center_y": .5}

        canvas.before:
            StencilPush
            RoundedRectangle:
                pos: root.pos
                size: root.size
            StencilUse
        canvas.after:
            StencilUnUse
            RoundedRectangle:
                pos: root.pos
                size: root.size
            StencilPop
    ...

class Test(App):
    def build(self):
        return Builder.load_string(KV)

Test().run()
```

## KivyMD

```
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.behaviors import StencilBehavior
from kivymd.uix.fitimage import FitImage

KV = '''
#:import os os
#:import images_path kivymd.images_path

MDCarousel:

    StencilImage:
        size_hint: .9, .8
```

(continues on next page)

(continued from previous page)

```

pos_hint: {"center_x": .5, "center_y": .5}
source: os.path.join(images_path, "logo", "kivymd-icon-512.png")
...

class StencilImage(FitImage, StencilBehavior):
    pass

class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

Test().run()

```

**API - kivymd.uix.behaviors.stencil\_behavior****class kivymd.uix.behaviors.stencil\_behavior.StencilBehavior**

Base class for controlling the stencil instructions of the widget.

**radius**

Canvas radius.

New in version 1.0.0.

```

# Top left corner slice.
MDWidget:
    radius: [25, 0, 0, 0]

```

*radius* is an `VariableListProperty` and defaults to [0, 0, 0, 0].**2.5.6 Declarative**

New in version 1.0.0.

As you already know, the Kivy framework provides the best/simplest/modern UI creation tool that allows you to separate the logic of your application from the description of the properties of widgets/GUI components. This tool is named **KV Language**.

But in addition to creating a user interface using the KV Language Kivy allows you to create user interface elements directly in the Python code. And if you've ever created a user interface in Python code, you know how ugly it looks. Even in the simplest user interface design, which was created using Python code it is impossible to trace the widget tree, because in Python code you build the user interface in an imperative style.

## Imperative style

```
from kivymd.app import MDApp
from kivymd.uix.bottomnavigation import MDBottomNavigation, MDBottomNavigationItem
from kivymd.uix.label import MDLabel
from kivymd.uix.screen import MDScreen

class Example(MDApp):
    def build(self):
        screen = MDScreen()
        bottom_navigation = MDBottomNavigation(
            panel_color="#eeeeaea",
            selected_color_background="#97ecf8",
            text_color_active="white",
        )

        data = {
            "screen 1": {"text": "Mail", "icon": "gmail"},
            "screen 2": {"text": "Discord", "icon": "discord"},
            "screen 3": {"text": "LinkedIN", "icon": "linkedin"},
        }
        for key in data.keys():
            text = data[key]["text"]
            navigation_item = MDBottomNavigationItem(
                name=key, text=text, icon=data[key]["icon"]
            )
            navigation_item.add_widget(MDLabel(text=text, halign="center"))
            bottom_navigation.add_widget(navigation_item)

        screen.add_widget(bottom_navigation)
        return screen

Example().run()
```



Take a look at the above code example. This is a very simple UI. But looking at this code, you will not be able to figure the widget tree and understand which UI this code implements. This is named imperative programming style, which is used in Kivy.

Now let's see how the same code is implemented using the KV language, which uses a declarative style of describing widget properties.

### Declarative style with KV language

```
from kivy.lang import Builder
from kivymd.app import MDApp

class Test(MDApp):
    def build(self):
        return Builder.load_string(
            '''
MDScreen:

    MDBottomNavigation:
        panel_color: "#eeeeaea"
        selected_color_background: "#97ecf8"
        text_color_active: "white"


        MDBottomNavigationItem:
            name: "screen 1"
            text: "Mail"
            icon: "gmail"

```

(continues on next page)

(continued from previous page)

```
MDLabel:  
    text: "Mail"  
    halign: "center"  
  
MDBottomNavigationItem:  
    name: "screen 2"  
    text: "Discord"  
    icon: "discord"  
  
MDLabel:  
    text: "Discord"  
    halign: "center"  
  
MDBottomNavigationItem:  
    name: "screen 3"  
    text: "LinkedIN"  
    icon: "linkedin"  
  
MDLabel:  
    text: "LinkedIN"  
    halign: "center"  
...  
)  
  
Test().run()
```

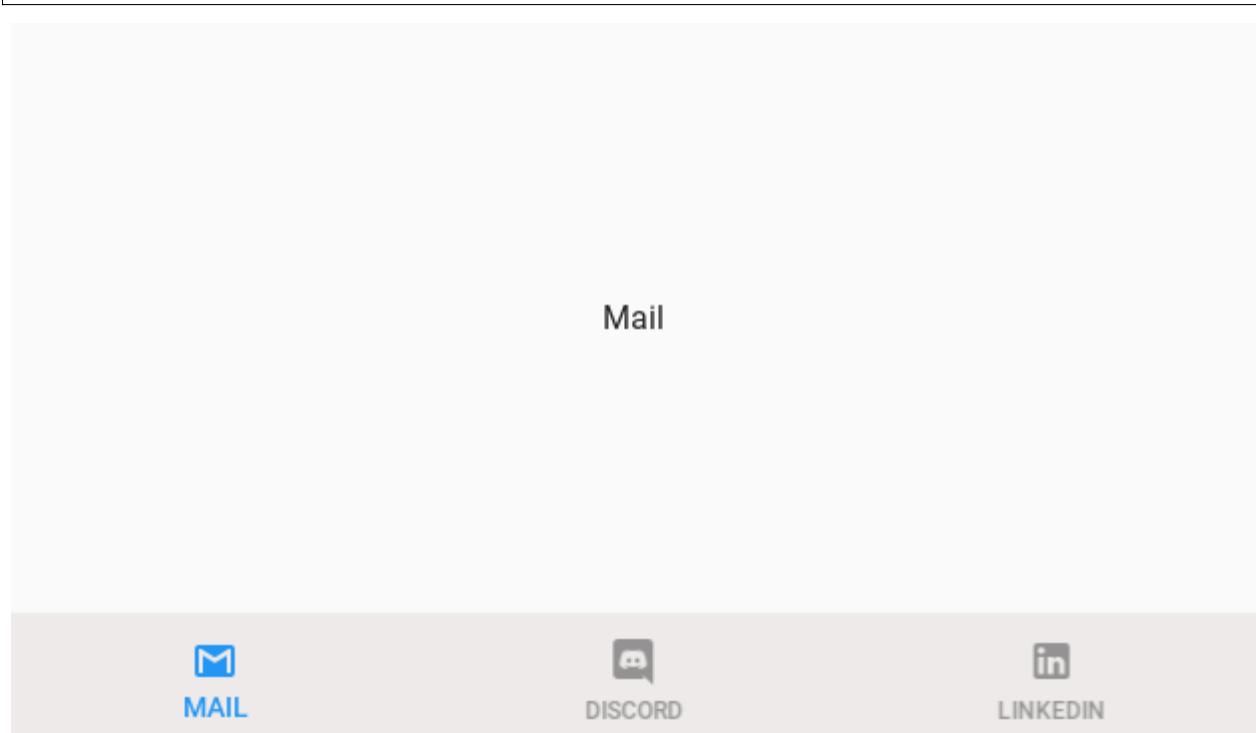

Looking at this code, we can now clearly see the widget tree and their properties. We can quickly navigate through the components of the screen and quickly change/add new properties/widgets. This is named declarative UI creation style.

But now the KivyMD library allows you to write Python code in a declarative style. Just as it is implemented in Flutter/Jetpack Compose/SwiftUI.

### Declarative style with Python code

```
from kivymd.app import MDApp
from kivymd.uix.bottomnavigation import MDBottomNavigation, MDBottomNavigationItem
from kivymd.uix.label import MDLabel
from kivymd.uix.screen import MDScreen

class Example(MDApp):
    def build(self):
        return (
            MDScreen(
                MDBottomNavigation(
                    MDBottomNavigationItem(
                        MDLabel(
                            text="Mail",
                            halign="center",
                        ),
                        name="screen 1",
                        text="Mail",
                        icon="gmail",
                    ),
                    MDBottomNavigationItem(
                        MDLabel(
                            text="Discord",
                            halign="center",
                        ),
                        name="screen 2",
                        text="Discord",
                        icon="discord",
                    ),
                    MDBottomNavigationItem(
                        MDLabel(
                            text="LinkedIN",
                            halign="center",
                        ),
                        name="screen 3",
                        text="LinkedIN",
                        icon="linkedin",
                    ),
                    panel_color="#eeeeaea",
                    selected_color_background="#97ecf8",
                    text_color_active="white",
                )
            )
        )
Example().run()
```

**Note:** The KivyMD library does not support creating Kivy widgets in Python code in a declarative style.

---

But you can still use the declarative style of creating Kivy widgets in Python code. To do this, you need to create a new class that will be inherited from the Kivy widget and the *DeclarativeBehavior* class:

```
from kivy.uix.boxlayout import BoxLayout
from kivy.uix.button import Button

from kivymd.app import MDApp
from kivymd.uix.behaviors import DeclarativeBehavior

class DeclarativeStyleBoxLayout(DeclarativeBehavior, BoxLayout):
    pass

class Example(MDApp):
    def build(self):
        return (
            DeclarativeStyleBoxLayout(
                Button(),
                Button(),
                orientation="vertical",
            )
        )

Example().run()
```

### Get objects by identifiers

In the declarative style in Python code, the `ids` parameter of the specified widget will return only the id of the child widget/container, ignoring other ids. Therefore, to get objects by identifiers in declarative style in Python code, you must specify all the container ids in which the widget is nested until you get to the desired id:

```
from kivymd.app import MDApp
from kivymd.uix.boxlayout import MDBoxLayout
from kivymd.uix.button import MDRaisedButton
from kivymd.uix.floatlayout import MDFloatLayout

class Example(MDApp):
    def build(self):
        return (
            MDBoxLayout(
                MDFloatLayout(
                    MDRaisedButton(
                        id="button_1",
                        text="Button 1",
                        pos_hint={"center_x": 0.5, "center_y": 0.5},
                )),
```

(continues on next page)

(continued from previous page)

```

        id="box_container_1",
    ),
    MDBBoxLayout(
        MDFloatLayout(
            MDRaisedButton(
                id="button_2",
                text="Button 2",
                pos_hint={"center_x": 0.5, "center_y": 0.5},
            ),
            id="float_container",
        ),
        id="box_container_2",
    )
)

def on_start(self):
    # {
    #     'box_container_1': <kivymd.uix.floatlayout.MDFloatLayout>,
    #     'box_container_2': <kivymd.uix.boxlayout.MDBoxLayout object>
    # }
    print(self.root.ids)

    # <kivymd.uix.button.button.MDRaisedButton>
    print(self.root.ids.box_container_2.ids.float_container.ids.button_2)

```

`Example().run()`

Yes, this is not a very good solution, but I think it will be fixed soon.

**Warning:** Declarative programming style in Python code in the KivyMD library is an experimental feature. Therefore, if you receive errors, do not hesitate to create new issue in the KivyMD repository.

#### API - `kivymd.uix.behaviors.declarative_behavior`

`class kivymd.uix.behaviors.declarative_behavior.DeclarativeBehavior(*args, **kwargs)`

Implements the creation and addition of child widgets as declarative programming style.

##### `id`

Widget ID.

`id` is an `StringProperty` and defaults to ''.

## 2.5.7 Background Color

---

**Note:** The following classes are intended for in-house use of the library.

---

### API - `kivymd.uix.behaviors.backgroundcolor_behavior`

```
class kivymd.uix.behaviors.backgroundcolor_behavior.BackgroundColorBehavior(**kwargs)
```

#### `background`

Background image path.

`background` is a `StringProperty` and defaults to `None`.

#### `radius`

Canvas radius.

```
# Top left corner slice.  
MDBoxLayout:  
    md_bg_color: app.theme_cls.primary_color  
    radius: [25, 0, 0, 0]
```

`radius` is an `VariableListProperty` and defaults to `[0, 0, 0, 0]`.

#### `md_bg_color`

The background color of the widget (`Widget`) that will be inherited from the `BackgroundColorBehavior` class.

For example:

```
Widget:  
    canvas:  
        Color:  
            rgba: 0, 1, 1, 1  
        Rectangle:  
            size: self.size  
            pos: self.pos
```

similar to code:

```
<MyWidget@BackgroundColorBehavior>  
    md_bg_color: 0, 1, 1, 1
```

`md_bg_color` is an `ColorProperty` and defaults to `[1, 1, 1, 0]`.

#### `line_color`

If a custom value is specified for the `line_color` parameter, the border of the specified color will be used to border the widget:

```
MDBoxLayout:  
    size_hint: .5, .2  
    md_bg_color: 0, 1, 1, .5
```

(continues on next page)

(continued from previous page)

```
line_color: 0, 0, 1, 1
radius: [24, ]
```

New in version 0.104.2.

`line_color` is an `ColorProperty` and defaults to `[0, 0, 0, 0]`.

#### line\_width

Border of the specified width will be used to border the widget.

New in version 1.0.0.

`line_width` is an `NumericProperty` and defaults to `1`.

#### angle

#### background\_origin

`on_md_bg_color(self, instance_md_widget, color: Union[list, str])`

`update_background_origin(self, instance_md_widget, pos: List[float])`

```
class kivymd.uix.behaviors.backgroundcolor_behavior.SpecificBackgroundColorBehavior(**kwargs)
```

#### background\_palette

See `kivymd.color_definitions.palette`.

`background_palette` is an `OptionProperty` and defaults to ‘Primary’.

#### background\_hue

See `kivymd.color_definitions.hue`.

`background_hue` is an `OptionProperty` and defaults to ‘500’.

#### specific\_text\_color

`specific_text_color` is an `ColorProperty` and defaults to `[0, 0, 0, 0.87]`.

#### specific\_secondary\_text\_color

`specific_secondary_text_color` is an `:class:`~kivy.properties.ColorProperty` and defaults to `[0, 0, 0, 0.87]`.

## 2.5.8 Ripple

**Classes implements a circular and rectangular ripple effects.**

To create a widget with circular ripple effect, you must create a new class that inherits from the `CircularRippleBehavior` class.

For example, let’s create an image button with a circular ripple effect:

```
from kivy.lang import Builder
from kivy.uix.behaviors import ButtonBehavior
from kivy.uix.image import Image
```

(continues on next page)

(continued from previous page)

```
from kivymd.app import MDApp
from kivymd.uix.behaviors import CircularRippleBehavior

KV = '''
MDScreen:

    CircularRippleButton:
        source: "data/logo/kivy-icon-256.png"
        size_hint: None, None
        size: "250dp", "250dp"
        pos_hint: {"center_x": .5, "center_y": .5}
'''


class CircularRippleButton(CircularRippleBehavior, ButtonBehavior, Image):
    def __init__(self, **kwargs):
        self.ripple_scale = 0.85
        super().__init__(**kwargs)

class Example(MDApp):
    def build(self):
        return Builder.load_string(KV)

Example().run()
```

To create a widget with rectangular ripple effect, you must create a new class that inherits from the `RectangularRippleBehavior` class:

```
from kivy.lang import Builder
from kivy.uix.behaviors import ButtonBehavior

from kivymd.app import MDApp
from kivymd.uix.behaviors import RectangularRippleBehavior, BackgroundColorBehavior

KV = '''
MDScreen:

    RectangularRippleButton:
        size_hint: None, None
        size: "250dp", "50dp"
        pos_hint: {"center_x": .5, "center_y": .5}
'''


class RectangularRippleButton(
    RectangularRippleBehavior, ButtonBehavior, BackgroundColorBehavior
):
    md_bg_color = [0, 0, 1, 1]
```

(continues on next page)

(continued from previous page)

```
class Example(MDApp):
    def build(self):
        return Builder.load_string(KV)

Example().run()
```

**API - kivymd.uix.behaviors.ripple\_behavior****class kivymd.uix.behaviors.ripple\_behavior.CommonRipple**

Base class for ripple effect.

**ripple\_rad\_default**

The starting value of the radius of the ripple effect.

<u>CircularRippleButton:</u>
ripple_rad_default: 100

*ripple\_rad\_default* is an **NumericProperty** and defaults to *1*.**ripple\_color**

Ripple color in (r, g, b, a) format.

<u>CircularRippleButton:</u>
ripple_color: app.theme_cls.primary_color

*ripple\_color* is an **ColorProperty** and defaults to *None*.**ripple\_alpha**

Alpha channel values for ripple effect.

<u>CircularRippleButton:</u>
ripple_alpha: .9
ripple_color: app.theme_cls.primary_color

*ripple\_alpha* is an **NumericProperty** and defaults to *0.5*.**ripple\_scale**

Ripple effect scale.

<u>CircularRippleButton:</u>
ripple_scale: .5

```
CircularRippleButton:  
    ripple_scale: 1
```

*ripple\_scale* is an `NumericProperty` and defaults to *None*.

#### **ripple\_duration\_in\_fast**

Ripple duration when touching to widget.

```
CircularRippleButton:  
    ripple_duration_in_fast: .1
```

*ripple\_duration\_in\_fast* is an `NumericProperty` and defaults to *0.3*.

#### **ripple\_duration\_in\_slow**

Ripple duration when long touching to widget.

```
CircularRippleButton:  
    ripple_duration_in_slow: 5
```

*ripple\_duration\_in\_slow* is an `NumericProperty` and defaults to *2*.

#### **ripple\_duration\_out**

The duration of the disappearance of the wave effect.

```
CircularRippleButton:  
    ripple_duration_out: 5
```

*ripple\_duration\_out* is an `NumericProperty` and defaults to *0.3*.

#### **ripple\_canvas\_after**

The ripple effect is drawn above/below the content.

New in version 1.0.0.

```
MDIconButton:  
    ripple_canvas_after: True  
    icon: "android"  
    ripple_alpha: .8  
    ripple_color: app.theme_cls.primary_color  
    icon_size: "100sp"
```

```
MDIconButton:  
    ripple_canvas_after: False  
    icon: "android"  
    ripple_alpha: .8  
    ripple_color: app.theme_cls.primary_color  
    icon_size: "100sp"
```

*ripple\_canvas\_after* is an `BooleanProperty` and defaults to `True`.

### **ripple\_func\_in**

Type of animation for ripple in effect.

*ripple\_func\_in* is an `StringProperty` and defaults to ‘`out_quad`’.

### **ripple\_func\_out**

Type of animation for ripple out effect.

*ripple\_func\_out* is an `StringProperty` and defaults to ‘`ripple_func_out`’.

## **abstract lay\_canvas\_instructions(self)**

**start\_ripple(self)**

**finish\_ripple(self)**

**fade\_out(self, \*args)**

**anim\_complete(self, \*args)**

**on\_touch\_down(self, touch)**

**call\_ripple\_animation\_methods(self, touch)**

**on\_touch\_move(self, touch, \*args)**

**on\_touch\_up(self, touch)**

## **class kivymd.uix.behaviors.ripple\_behavior.RectangularRippleBehavior**

Class implements a rectangular ripple effect.

### **ripple\_scale**

See *ripple\_scale*.

*ripple\_scale* is an `NumericProperty` and defaults to `2.75`.

## **lay\_canvas\_instructions(self)**

## **class kivymd.uix.behaviors.ripple\_behavior.CircularRippleBehavior**

Class implements a circular ripple effect.

### **ripple\_scale**

See *ripple\_scale*.

*ripple\_scale* is an `NumericProperty` and defaults to `1`.

## **lay\_canvas\_instructions(self)**

## 2.5.9 Magic

### Magical effects for buttons.

**Warning:** Magic effects do not work correctly with *KivyMD* buttons!

To apply magic effects, you must create a new class that is inherited from the widget to which you apply the effect and from the *MagicBehavior* class.

In *KV file*:

```
<MagicButton@MagicBehavior+MDRectangleFlatButton>
```

In *python file*:

```
class MagicButton(MagicBehavior, MDRectangleFlatButton):  
    pass
```

The *MagicBehavior* class provides five effects:

- *MagicBehavior.wobble*
- *MagicBehavior.grow*
- *MagicBehavior.shake*
- *MagicBehavior.twist*
- *MagicBehavior.shrink*

Example:

```
from kivy.lang import Builder  
  
from kivymd.app import MDApp  
  
KV = '''  
<MagicButton@MagicBehavior+MDRectangleFlatButton>  
  
MDFloatLayout:  
  
    MagicButton:  
        text: "WOBBLE EFFECT"  
        on_release: self.wobble()  
        pos_hint: {"center_x": .5, "center_y": .3}  
  
    MagicButton:  
        text: "GROW EFFECT"  
        on_release: self.grow()  
        pos_hint: {"center_x": .5, "center_y": .4}
```

(continues on next page)

(continued from previous page)

```

MagicButton:
    text: "SHAKE EFFECT"
    on_release: self.shake()
    pos_hint: {"center_x": .5, "center_y": .5}

MagicButton:
    text: "TWIST EFFECT"
    on_release: self.twist()
    pos_hint: {"center_x": .5, "center_y": .6}

MagicButton:
    text: "SHRINK EFFECT"
    on_release: self.shrink()
    pos_hint: {"center_x": .5, "center_y": .7}
...
.

class Example(MDApp):
    def build(self):
        return Builder.load_string(KV)

Example().run()

```

**API - kivymd.uix.behaviors.magic\_behavior**

```

class kivymd.uix.behaviors.magic_behavior.MagicBehavior

magic_speed
    Animation playback speed.
    magic_speed is a NumericProperty and defaults to 1.
grow(self)
    Grow effect animation.
shake(self)
    Shake effect animation.
wobble(self)
    Wobble effect animation.
twist(self)
    Twist effect animation.
shrink(self)
    Shrink effect animation.
on_touch_up(self, *args)


```

## 2.5.10 Elevation

See also:

Material Design spec, Elevation

Elevation is the relative distance between two surfaces along the z-axis.

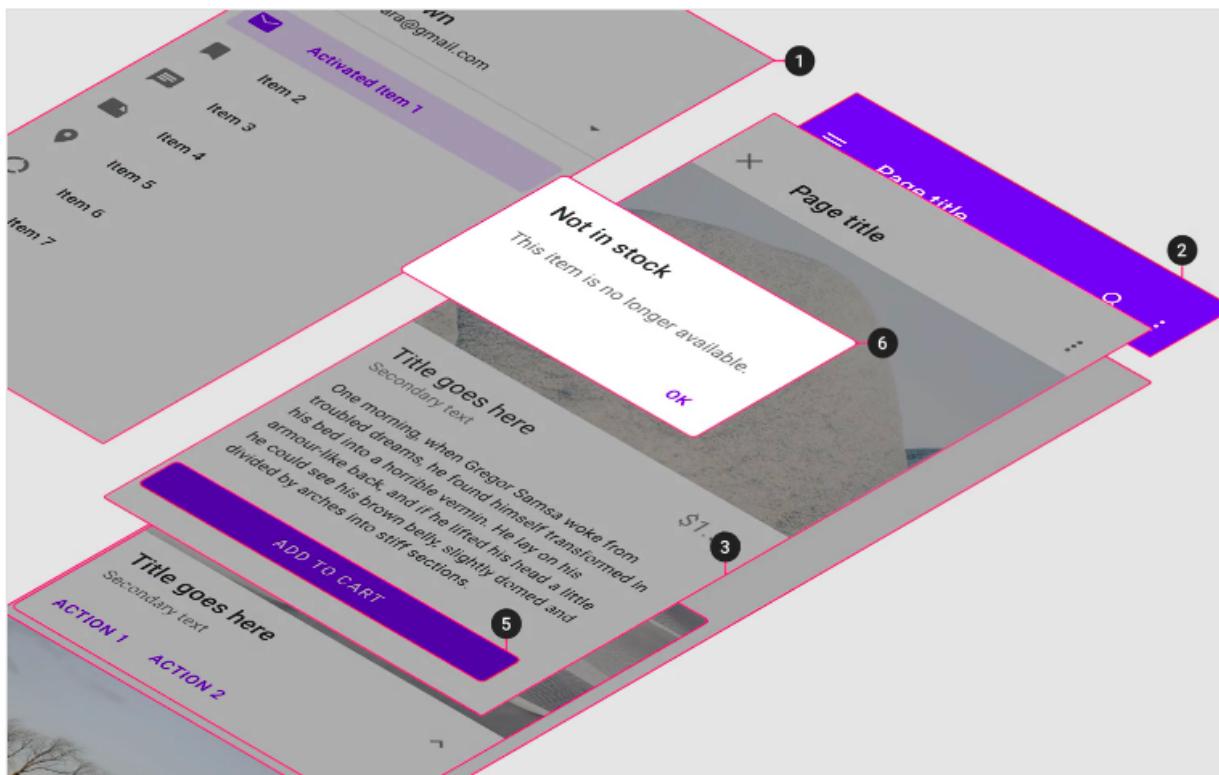

To create an elevation effect, use the `CommonElevationBehavior` class. For example, let's create a button with a rectangular elevation effect:

Declarative style with KV

```
from kivy.lang import Builder
from kivymd.uxbehaviors import ButtonBehavior

from kivymd.app import MDApp
from kivymd.uxbehaviors import (
    RectangularRippleBehavior,
    BackgroundColorBehavior,
    CommonElevationBehavior,
)

KV = '''
<RectangularElevationButton>
    size_hint: None, None
```

(continues on next page)

(continued from previous page)

```

size: "250dp", "50dp"

MDScreen:

# With elevation effect
RectangularElevationButton:
    pos_hint: {"center_x": .5, "center_y": .6}
    elevation: 4.5
    shadow_offset: 0, 6

# Without elevation effect
RectangularElevationButton:
    pos_hint: {"center_x": .5, "center_y": .4}
'''


class RectangularElevationButton(
    RectangularRippleBehavior,
    CommonElevationBehavior,
    ButtonBehavior,
    BackgroundColorBehavior,
):
    def __init__(self, **kwargs):
        super().__init__(**kwargs)
        self.md_bg_color = "red"

class Example(MDApp):
    def build(self):
        return Builder.load_string(KV)

Example().run()

```

Declarative python style

```

from kivy.uix.behaviors import ButtonBehavior

from kivymd.app import MDApp
from kivymd.uix.behaviors import (
    RectangularRippleBehavior,
    BackgroundColorBehavior,
    CommonElevationBehavior,
)
from kivymd.uix.screen import MDScreen


class RectangularElevationButton(
    RectangularRippleBehavior,
    CommonElevationBehavior,
    ButtonBehavior,
)

```

(continues on next page)

(continued from previous page)


```

        BackgroundColorBehavior,
):
    def __init__(self, **kwargs):
        super().__init__(**kwargs)
        self.md_bg_color = "red"
        self.size_hint = (None, None)
        self.size = ("250dp", "50dp")

class Example(MDApp):
    def build(self):
        return (
            MDScreen(
                RectangularElevationButton(
                    pos_hint={"center_x": .5, "center_y": .6},
                    elevation=4.5,
                    shadow_offset=(0, 6),
                ),
                RectangularElevationButton(
                    pos_hint={"center_x": .5, "center_y": .4},
                ),
            )
        )

Example().run()

```

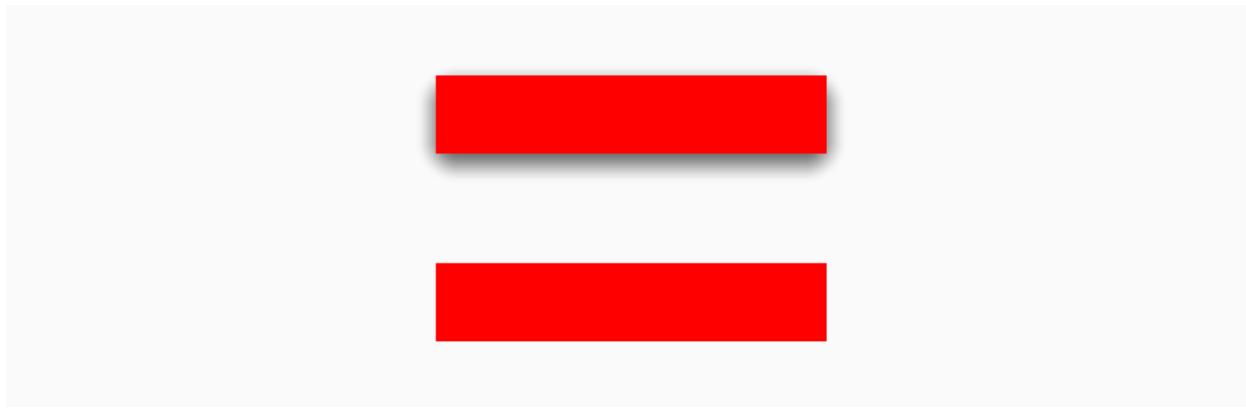

**Warning:** If before the KivyMD 1.1.0 library version you used the elevation property with an average value of 12 for the shadow, then starting with the KivyMD 1.1.0 library version, the average value of the elevation property will be somewhere 4.

Similarly, create a circular button:

Declarative style with KV

```

from kivy.lang import Builder
from kivy.uix.behaviors import ButtonBehavior

```

(continues on next page)

(continued from previous page)

```

from kivymd.app import MDApp
from kivymd.uix.behaviors import CircularRippleBehavior, CommonElevationBehavior
from kivymd.uix.floatlayout import MDFloatLayout

KV = """
<CircularElevationButton>
    size_hint: None, None
    size: "100dp", "100dp"
    radius: self.size[0] / 2
    shadow_radius: self.radius[0]
    md_bg_color: "red"

    MDIcon:
        icon: "hand-heart"
        halign: "center"
        valign: "center"
        pos_hint: {"center_x": .5, "center_y": .5}
        size: root.size
        pos: root.pos
        font_size: root.size[0] * .6
        theme_text_color: "Custom"
        text_color: "white"

MDScreen:

    CircularElevationButton:
        pos_hint: {"center_x": .5, "center_y": .6}
        elevation: 4
    ...

class CircularElevationButton(
    CommonElevationBehavior,
    CircularRippleBehavior,
    ButtonBehavior,
    MDFloatLayout,
):
    pass

class Example(MDApp):
    def build(self):
        return Builder.load_string(KV)

Example().run()

```

Declarative python style

```

from kivy.metrics import dp
from kivy.uix.behaviors import ButtonBehavior

```

(continues on next page)

(continued from previous page)

```
from kivymd.app import MDApp
from kivymd.uix.behaviors import CircularRippleBehavior, CommonElevationBehavior
from kivymd.uix.floatlayout import MDFloatLayout
from kivymd.uix.label import MDIcon
from kivymd.uix.screen import MDScreen

class CircularElevationButton( CommonElevationBehavior,
                               CircularRippleBehavior,
                               ButtonBehavior,
                               MDFloatLayout,
                               ):
    def __init__(self, **kwargs):
        super().__init__(**kwargs)
        self.size_hint = (None, None)
        self.size = (dp(100), dp(100))
        self.radius = dp(100) / 2
        self.shadow_radius = dp(100) / 2
        self.md_bg_color = "red"
        self.add_widget(
            MDIcon(
                icon="hand-heart",
                halign="center",
                valign="center",
                pos_hint={"center_x": .5, "center_y": .5},
                size=self.size,
                theme_text_color="Custom",
                text_color="white",
                font_size=self.size[0] * 0.6,
            )
        )

class Example(MDApp):
    def build(self):
        return (
            MDScreen(
                CircularElevationButton(
                    pos_hint={"center_x": .5, "center_y": .5},
                    elevation=4,
                )
            )
        )

Example().run()
```



### Animating the elevation

Declarative style with KV

```
from kivy.animation import Animation
from kivy.lang import Builder
from kivy.uix.behaviors import ButtonBehavior

from kivymd.app import MDApp
from kivymd.uix.behaviors import CommonElevationBehavior, RectangularRippleBehavior
from kivymd.uix.widget import MDWidget

KV = '''
MDScreen:

    ElevatedWidget:
        pos_hint: {'center_x': .5, 'center_y': .5}
        size_hint: None, None
        size: 100, 100
        md_bg_color: 0, 0, 1, 1
        elevation: 4
        radius: 18
'''


class ElevatedWidget(
    CommonElevationBehavior,
    RectangularRippleBehavior,
    ButtonBehavior,
    MDWidget,
):
    _elev = 0 # previous elevation value

    def on_press(self, *args):
        if not self._elev:
            self._elev = self.elevation
        Animation(elevation=self.elevation + 2, d=0.4).start(self)

    def on_release(self, *args):
```

(continues on next page)

(continued from previous page)

```

        Animation.cancel_all(self, "elevation")
        Animation(elevation=self._elev, d=0.1).start(self)

class Example(MDApp):
    def build(self):
        return Builder.load_string(KV)

Example().run()

```

Declarative python style

```

from kivy.animation import Animation
from kivy.uix.behaviors import ButtonBehavior

from kivymd.app import MDApp
from kivymd.uix.behaviors import CommonElevationBehavior, RectangularRippleBehavior
from kivymd.uix.screen import MDScreen
from kivymd.uix.widget import MDWidget


class ElevatedWidget(
    CommonElevationBehavior,
    RectangularRippleBehavior,
    ButtonBehavior,
    MDWidget,
):
    _elev = 0 # previous elevation value

    def on_press(self, *args):
        if not self._elev:
            self._elev = self.elevation
        Animation(elevation=self.elevation + 2, d=0.4).start(self)

    def on_release(self, *args):
        Animation.cancel_all(self, "elevation")
        Animation(elevation=self._elev, d=0.1).start(self)

class Example(MDApp):
    def build(self):
        return (
            MDScreen(
                ElevatedWidget(
                    pos_hint={'center_x': .5, 'center_y': .5},
                    size_hint=(None, None),
                    size=(100, 100),
                    md_bg_color="blue",
                    elevation=4,
                    radius=18,
                )

```

(continues on next page)

(continued from previous page)

```

        )
    )

Example().run()

```

**API - kivymd.uix.behaviors.elevation**

**class kivymd.uix.behaviors.elevation.CommonElevationBehavior(\*\*kwargs)**

Common base class for rectangular and circular elevation behavior.

**elevation**

Elevation of the widget.

*elevation* is an `BoundedNumericProperty` and defaults to *0*.

**shadow\_radius**

Radius of the corners of the shadow.

New in version 1.1.0.

You don't have to use this parameter. The radius of the elevation effect is calculated automatically one way or another based on the radius of the parent widget, for example:

```

from kivy.lang import Builder

from kivymd.app import MDApp


KV = '''
MDScreen:

    MDCard:
        radius: 12, 46, 12, 46
        size_hint: .5, .3
        pos_hint: {"center_x": .5, "center_y": .5}
        elevation: 4
        shadow_softness: 8
        shadow_offset: (-2, 2)
    ...

class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

Test().run()

```



**Note:** However, if you want to use this parameter, remember that the angle values for the radius of the Kivy widgets and the radius for the shader are different.

```
shadow_radius = ['top-right', 'bot-right', 'top-left', 'bot-left']
kivy_radius = ['top-left', 'top-right', 'bottom-right', 'bottom-left']
```

*shadow\_radius* is an `VariableListProperty` and defaults to `[0, 0, 0, 0]`.

### shadow\_softness

Softness of the shadow.

New in version 1.1.0.

```
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.behaviors import BackgroundColorBehavior,
    CommonElevationBehavior

KV = '''
<RectangularElevationButton>
    size_hint: None, None
    size: "250dp", "50dp"

MDScreen:

    RectangularElevationButton:
        pos_hint: {"center_x": .5, "center_y": .6}
        elevation: 6
        shadow_softness: 6

    RectangularElevationButton:
```

(continues on next page)

(continued from previous page)


```

pos_hint: {"center_x": .5, "center_y": .4}
elevation: 6
shadow_softness: 12
...
class RectangularElevationButton(CommonElevationBehavior,
    BackgroundColorBehavior):
    md_bg_color = [0, 0, 1, 1]

class Example(MDApp):
    def build(self):
        return Builder.load_string(KV)

Example().run()

```

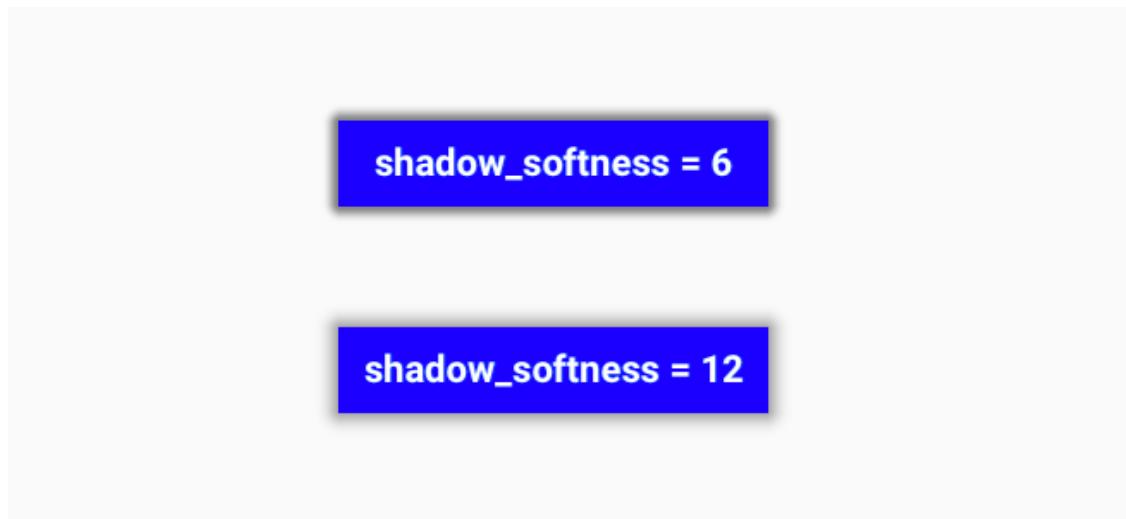

*shadow\_softness* is an `NumericProperty` and defaults to `12`.

#### **shadow\_softness\_size**

The value of the softness of the shadow.

New in version 1.1.0.

Since we can't properly adjust the `shadow_softness` value and the `elevation` value, we added the `shadow_softness_size` attribute to control the shadow size.

```

MDCard:
    elevation: 4
    shadow_radius: 8

```



But if we need to increase the elevation value:

```
MDCard:  
    elevation: 8  
    shadow_radius: 16
```

... we will get a sharp dark shadow:



To soften the shadow, we need to use the `shadow_softness` value:

```
MDCard:  
    elevation: 8  
    shadow_radius: 16  
    shadow_softness: 24
```



But this is still not the result we expected. But it's still not the result we expected. And if we keep increasing the value of `shadow_softness`, then we won't be able to change the result much:



We need to use the `shadow_softness_size` value if we have increased the `elevation` value and want to get the smoothness of the shadow:

```
MDCard:  
    elevation: 8  
    shadow_radius: 24  
    shadow_softness: 56  
    shadow_softness_size: 3.5
```



`shadow_softness_size` is an `NumericProperty` and defaults to 2.

#### `shadow_offset`

Offset of the shadow.

New in version 1.1.0.

```
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.behaviors import BackgroundColorBehavior, ↴
    CommonElevationBehavior

KV = '''
<RectangularElevationButton>
    size_hint: None, None
    size: "100dp", "100dp"
'''


MDScreen:

    RectangularElevationButton:
        pos_hint: {"center_x": .5, "center_y": .5}
        elevation: 6
        shadow_radius: 18
        shadow_softness: 24
        shadow_offset: 12, 12
    ...


class RectangularElevationButton(CommonElevationBehavior, ↴
    BackgroundColorBehavior):
    md_bg_color = [0, 0, 1, 1]


class Example(MDApp):
    def build(self):
        return Builder.load_string(KV)
```

(continues on next page)

(continued from previous page)

```
Example().run()
```

**shadow\_offset = (12, 12)**



```
RectangularElevationButton:  
    shadow_offset: -12, 12
```

**shadow\_offset = (-12, 12)**




```
RectangularElevationButton:  
    shadow_offset: -12, -12
```



**shadow\_offset = (-12, -12)**

```
RectangularElevationButton:  
    shadow_offset: 12, -12
```



**shadow\_offset = (12, -12)**


*shadow\_offset* is an `ListProperty` and defaults to `(0, 2)`.

#### **shadow\_color**

Offset of the shadow.

New in version 1.1.0.

```
RectangularElevationButton:  
    shadow_color: 0, 0, 1, .8
```



`shadow_color` is an `ColorProperty` and defaults to `[0.4, 0.4, 0.4, 0.8]`.

`widget_pos`

`get_shader_string(self)`

`set_shader_string(self, *args)`

`update_resolution(self)`

`on_shadow_color(self, instance, value)`

`on_shadow_radius(self, instance, value)`

`on_shadow_softness(self, instance, value)`

`on_elevation(self, instance, value)`

`on_shadow_offset(self, instance, value)`

`on_pos(self, *args)`

`on_size(self, *args)`

`on_opacity(self, instance, value: int | float)`

Adjusts the transparency of the shadow according to the transparency of the widget.

`on_radius(self, instance, value)`

`on_disabled(self, instance, value)`

`hide_elevation(self, hide: bool)`

`class kivymd.uix.behaviors.elevation.RectangularElevationBehavior(**kwargs)`

Deprecated since version 1.1.0.

Use `CommonElevationBehavior` class instead.

`class kivymd.uix.behaviors.elevation.CircularElevationBehavior(**kwargs)`

Deprecated since version 1.1.0.

Use `CommonElevationBehavior` class instead.

```
class kivymd.uix.behaviors.elevation.RoundedRectangularElevationBehavior(**kwargs)
```

Deprecated since version 1.1.0.

Use [CommonElevationBehavior](#) class instead.

```
class kivymd.uix.behaviors.elevation.FakeRectangularElevationBehavior(**kwargs)
```

Deprecated since version 1.1.0.

Use [CommonElevationBehavior](#) class instead.

```
class kivymd.uix.behaviors.elevation.FakeCircularElevationBehavior(**kwargs)
```

Deprecated since version 1.1.0.

Use [CommonElevationBehavior](#) class instead.

## 2.5.11 Rotate

New in version 1.1.0.

Base class for controlling the rotate of the widget.

---

**Note:** See [kivy.graphics.Rotate](#) for more information.

---

### Kivy

```
from kivy.animation import Animation
from kivy.lang import Builder
from kivy.app import App
from kivy.properties import NumericProperty
from kivy.uix.button import Button

KV = '''
Screen:

    RotateButton:
        size_hint: .5, .5
        pos_hint: {"center_x": .5, "center_y": .5}
        on_release: app.change_rotate(self)

        canvas.before:
            PushMatrix
            Rotate:
                angle: self.rotate_value_angle
                axis: 0, 0, 1
                origin: self.center
        canvas.after:
            PopMatrix
'''
```

(continues on next page)

(continued from previous page)

```

class RotateButton(Button):
    rotate_value_angle = NumericProperty(0)

class Test(App):
    def build(self):
        return Builder.load_string(KV)

    def change_rotate(self, instance_button: Button) -> None:
        Animation(rotate_value_angle=45, d=0.3).start(instance_button)

Test().run()

```

## KivyMD

```

from kivy.animation import Animation
from kivy.lang import Builder
from kivy.uix.behaviors import ButtonBehavior

from kivymd.app import MDApp
from kivymd.uix.behaviors import RotateBehavior
from kivymd.uix.boxlayout import MDBBoxLayout

KV = '''
MDScreen:

    RotateBox:
        size_hint: .5, .5
        pos_hint: {"center_x": .5, "center_y": .5}
        on_release: app.change_rotate(self)
        md_bg_color: "red"
'''


class RotateBox(ButtonBehavior, RotateBehavior, MDBBoxLayout):
    pass


class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

    def change_rotate(self, instance_button: RotateBox) -> None:
        Animation(rotate_value_angle=45, d=0.3).start(instance_button)

Test().run()

```

**API - kivymd.uix.behaviors.rotate\_behavior****class kivymd.uix.behaviors.rotate\_behavior.RotateBehavior**

Base class for controlling the rotate of the widget.

**rotate\_value\_angle**

Property for getting/setting the angle of the rotation.

*rotate\_value\_angle* is an [NumericProperty](#) and defaults to 0.**rotate\_value\_axis**

Property for getting/setting the axis of the rotation.

*rotate\_value\_axis* is an [ListProperty](#) and defaults to (0, 0, 1).

## 2.5.12 Focus

### Changing the background color when the mouse is on the widget.

To apply focus behavior, you must create a new class that is inherited from the widget to which you apply the behavior and from the [FocusBehavior](#) class.

#### Usage

```
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.uix.behaviors import RectangularElevationBehavior, FocusBehavior
from kivymd.uix.boxlayout import MDBoxLayout

KV = '''
MDScreen:
    md_bg_color: 1, 1, 1, 1

    FocusWidget:
        size_hint: .5, .3
        pos_hint: {"center_x": .5, "center_y": .5}
        md_bg_color: app.theme_cls.bg_light

        MDLabel:
            text: "Label"
            theme_text_color: "Primary"
            pos_hint: {"center_y": .5}
            halign: "center"
    ...

class FocusWidget(MDBoxLayout, RectangularElevationBehavior, FocusBehavior):
    pass
```

(continues on next page)

(continued from previous page)

```
class Test(MDApp):
    def build(self):
        self.theme_cls.theme_style = "Dark"
        return Builder.load_string(KV)

Test().run()
```

Color change at focus/defocus

```
FocusWidget:
    focus_color: 1, 0, 1, 1
    unfocus_color: 0, 0, 1, 1
```

## API - kivymd.uix.behaviors.focus\_behavior

`class kivymd.uix.behaviors.FocusBehavior(**kwargs)`

### Events

#### `on_enter`

Called when mouse enters the bbox of the widget AND the widget is visible

#### `on_leave`

Called when the mouse exits the widget AND the widget is visible

#### `focus_behavior`

Using focus when hovering over a widget.

`focus_behavior` is a `BooleanProperty` and defaults to `False`.

#### `focus_color`

The color of the widget when the mouse enters the bbox of the widget.

`focus_color` is a `ColorProperty` and defaults to `None`.

#### `unfocus_color`

The color of the widget when the mouse exits the bbox of the widget.

`unfocus_color` is a `ColorProperty` and defaults to `None`.

#### `on_enter(self)`

Called when mouse enters the bbox of the widget.

#### `on_leave(self)`

Called when the mouse exits the widget.

## 2.6 Effects

### 2.6.1 StiffScrollEffect

An Effect to be used with ScrollView to prevent scrolling beyond the bounds, but politely.

A ScrollView constructed with StiffScrollEffect, eg. ScrollView(effect\_cls=StiffScrollEffect), will get harder to scroll as you get nearer to its edges. You can scroll all the way to the edge if you want to, but it will take more finger-movement than usual.

Unlike DampedScrollEffect, it is impossible to overscroll with StiffScrollEffect. That means you cannot push the contents of the ScrollView far enough to see what's beneath them. This is appropriate if the ScrollView contains, eg., a background image, like a desktop wallpaper. Overscrolling may give the impression that there is some reason to overscroll, even if just to take a peek beneath, and that impression may be misleading.

StiffScrollEffect was written by Zachary Spector. His other stuff is at: <https://github.com/LogicalDash/> He can be reached, and possibly hired, at: [zacharyspector@gmail.com](mailto:zacharyspector@gmail.com)

#### API - kivymd.effects.stiffscroll.stiffscroll

```
class kivymd.effects.stiffscroll.stiffscroll.StiffScrollEffect(**kwargs)
```

Kinetic effect class. See module documentation for more information.

##### drag\_threshold

Minimum distance to travel before the movement is considered as a drag.

`drag_threshold` is an `NumericProperty` and defaults to '20sp'.

##### min

Minimum boundary to stop the scrolling at.

`min` is an `NumericProperty` and defaults to 0.

##### max

Maximum boundary to stop the scrolling at.

`max` is an `NumericProperty` and defaults to 0.

##### max\_friction

How hard should it be to scroll, at the worst?

`max_friction` is an `NumericProperty` and defaults to 1.

##### body

Proportion of the range in which you can scroll unimpeded.

`body` is an `NumericProperty` and defaults to 0.7.

##### scroll

Computed value for scrolling

`scroll` is an `NumericProperty` and defaults to 0.0.

##### transition\_min

The AnimationTransition function to use when adjusting the friction near the minimum end of the effect.

`transition_min` is an `ObjectProperty` and defaults to `kivy.animation.AnimationTransition`.

**transition\_max**

The AnimationTransition function to use when adjusting the friction near the maximum end of the effect.

`transition_max` is an `ObjectProperty` and defaults to `kivy.animation.AnimationTransition`.

**target\_widget**

The widget to apply the effect to.

`target_widget` is an `ObjectProperty` and defaults to `None`.

**displacement**

The absolute distance moved in either direction.

`displacement` is an `NumericProperty` and defaults to `0`.

**update\_velocity(self, dt)**

Before actually updating my velocity, meddle with `self.friction` to make it appropriate to where I'm at, currently.

**on\_value(self, \*args)**

Prevent moving beyond my bounds, and update `self.scroll`

**start(self, val, t=None)**

Start movement with `self.friction = self.base_friction`

**update(self, val, t=None)**

Reduce the impact of whatever change has been made to me, in proportion with my current friction.

**stop(self, val, t=None)**

Work out whether I've been flung.

## 2.6.2 FadingEdgeEffect

New in version 1.0.0.

The `FadingEdgeEffect` class implements a fade effect for `KivyMD` widgets:

```
from kivy.lang import Builder
from kivy.uix.scrollview import ScrollView

from kivymd.app import MDApp
from kivymd.effects.fadingedge_fadingedge import FadingEdgeEffect
from kivymd.uix.list import OneLineListItem

KV = """
MDScreen:

    FadeScrollView:
        fade_height: self.height / 2
        fade_color: root.md_bg_color

    MDList:
        id: container
"""

Builder.load_string(KV)
```

(continues on next page)

(continued from previous page)

```

class FadeScrollView(FadingEdgeEffect, ScrollView):
    pass


class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

    def on_start(self):
        for i in range(20):
            self.root.ids.container.add_widget(
                OneLineListItem(text=f"Single-line item {i}")
            )

Test().run()

```

---

**Note:** Use the same color value for the fade\_color parameter as for the parent widget.

---

### API - kivymd.effects.fadingedge.FadingEdgeEffect

**class kivymd.effects.fadingedge.FadingEdgeEffect(\*\*kwargs)**

The class implements the fade effect.

New in version 1.0.0.

#### **fade\_color**

Fade color.

*fade\_color* is an `ColorProperty` and defaults to *None*.

#### **fade\_height**

Fade height.

*fade\_height* is an `ColorProperty` and defaults to *0*.

#### **edge\_top**

Display fade edge top.

*edge\_top* is an `BooleanProperty` and defaults to *True*.

#### **edge\_bottom**

Display fade edge bottom.

*edge\_bottom* is an `BooleanProperty` and defaults to *True*.

#### **set\_fade(self, interval: Union[int, float])**

Draws a bottom and top fade border on the canvas.

#### **update\_canvas(self, instance\_fadind\_edge\_effect, size: list[int, int], rectangle\_top: Rectangle, rectangle\_bottom: Rectangle, index: int)**

Updates the position and size of the fade border on the canvas. Called when the application screen is resized.

### 2.6.3 RouletteScrollEffect

This is a subclass of `kivy.effects.ScrollEffect` that simulates the motion of a roulette, or a notched wheel (think Wheel of Fortune). It is primarily designed for emulating the effect of the iOS and android date pickers.

#### Usage

Here's an example of using `RouletteScrollEffect` for a `kivy.uix.scrollviewScrollView`:

```
from kivy.uix.gridlayout import GridLayout
from kivy.uix.button import Button
from kivy.uix.scrollview import ScrollView

# Preparing a `GridLayout` inside a `ScrollView`.
layout = GridLayout(cols=1, padding=10, size_hint=(None, None), width=500)
layout.bind(minimum_height=layout.setter('height'))

for i in range(30):
    btn = Button(text=str(i), size=(480, 40), size_hint=(None, None))
    layout.add_widget(btn)

root = ScrollView(
    size_hint=(None, None),
    size=(500, 320),
    pos_hint={'center_x': .5, 'center_y': .5},
    do_scroll_x=False,
)
root.add_widget(layout)

# Preparation complete. Now add the new scroll effect.
root.effect_y = RouletteScrollEffect(anchor=20, interval=40)
runTouchApp(root)
```

Here the `ScrollView` scrolls through a series of buttons with height 40. We then attached a `RouletteScrollEffect` with interval 40, corresponding to the button heights. This allows the scrolling to stop at the same offset no matter where it stops. The `RouletteScrollEffect.anchor` adjusts this offset.

#### Customizations

Other settings that can be played with include:

`RouletteScrollEffect.pull_duration`, `RouletteScrollEffect.coasting_alpha`,  
`RouletteScrollEffect.pull_back_velocity`, and `RouletteScrollEffect.terminal_velocity`.

See their module documentations for details.

`RouletteScrollEffect` has one event `on_coasted_to_stop` that is fired when the roulette stops, “making a selection”. It can be listened to for handling or cleaning up choice making.

## API - kivymd.effects.roulettescroll.roulettescroll

**class kivymd.effects.roulettescroll.roulettescroll.RouletteScrollEffect(\*\*kwargs)**

This is a subclass of `kivy.effects.ScrollEffect` that simulates the motion of a roulette, or a notched wheel (think Wheel of Fortune). It is primarily designed for emulating the effect of the iOS and android date pickers.

New in version 0.104.2.

### **drag\_threshold**

Overrides `ScrollEffect.drag_threshold` to abolish drag threshold.

---

**Note:** If using this with a `Roulette` or other `Tickline` subclasses, what matters is `Tickline.drag_threshold`, which is passed to this attribute in the end.

---

*drag\_threshold* is an `NumericProperty` and defaults to 0.

### **min**

### **max**

### **interval**

The interval of the values of the “roulette”.

*interval* is an `NumericProperty` and defaults to 50.

### **anchor**

One of the valid stopping values.

*anchor* is an `NumericProperty` and defaults to 0.

### **pull\_duration**

When movement slows around a stopping value, an animation is used to pull it toward the nearest value. *pull\_duration* is the duration used for such an animation.

*pull\_duration* is an `NumericProperty` and defaults to 0.2.

### **coasting\_alpha**

When within *coasting\_alpha* \* *interval* of the next notch and velocity is below `terminal_velocity`, coasting begins and will end on the next notch.

*coasting\_alpha* is an `NumericProperty` and defaults to 0.5.

### **pull\_back\_velocity**

The velocity below which the scroll value will be drawn to the *nearest* notch instead of the *next* notch in the direction travelled.

*pull\_back\_velocity* is an `NumericProperty` and defaults to 50sp.

### **terminal\_velocity**

If velocity falls between *pull\_back\_velocity* and `terminal_velocity` then the movement will start to coast to the next coming stopping value.

`terminal_velocity` is computed from a set formula given *interval*, *coasting\_alpha*, *pull\_duration*, and *friction*. Setting `terminal_velocity` has the effect of setting *pull\_duration*.

`get_term_vel(self)`

`set_term_vel(self, val)`

**start(self, val, t=None)**

Start the movement.

#### Parameters

**val: float or int**

Value of the movement

**t: float, defaults to None**

Time when the movement happen. If no time is set, it will use time.time()

**on\_notch(self, \*args)**

**nearest\_notch(self, \*args)**

**next\_notch(self, \*args)**

**near\_notch(self, d=0.01)**

**near\_next\_notch(self, d=None)**

**update\_velocity(self, dt)**

(internal) Update the velocity according to the frametime and friction.

**on\_coasted\_to\_stop(self, \*args)**

This event fires when the roulette has stopped, *making a selection*.

## 2.7 Templates

### 2.7.1 RotateWidget

Deprecated since version 1.0.0.

---

**Note:** *RotateWidget* class has been deprecated. Please use [RotateBehavior](#) class instead.

---

**API - kivymd.uix.templates.rotatewidget.rotatewidget**

**class kivymd.uix.templates.rotatewidget.rotatewidget(\*\*kwargs)**

Deprecated since version 1.1.0.

Use [RotateBehavior](#) class instead.

## 2.7.2 ScaleWidget

Deprecated since version 1.1.0.

Base class for controlling the scale of the widget.

---

**Note:** *ScaleWidget* class has been deprecated. Please use *ScaleBehavior* class instead.

---

### API - `kivymd.uix.templates.scalewidget.scalewidget`

```
class kivymd.uix.templates.scalewidget.scalewidget(**kwargs)
```

Deprecated since version 1.1.0.

Use *ScaleBehavior* class instead.

## 2.7.3 StencilWidget

Deprecated since version 1.1.0.

Base class for controlling the stencil instructions of the widget.

---

**Note:** *StencilWidget* class has been deprecated. Please use *StencilBehavior* class instead.

---

### API - `kivymd.uix.templates.stencilwidget.stencilwidget`

```
class kivymd.uix.templates.stencilwidget.stencilwidget(**kwargs)
```

Deprecated since version 1.1.0.

Use *StencilBehavior* class instead.

## 2.8 Changelog

### 2.8.1 1.1.1

See on GitHub: [tag 1.1.1](#) | [compare 1.1.0/1.1.1](#)

```
pip install kivymd==1.1.1
```

- Bug fixes and other minor improvements.

## 2.8.2 1.1.0

See on GitHub: [tag 1.1.0](#) | [compare 1.0.2/1.1.0](#)

```
pip install kivymd==1.1.0
```

- Bug fixes and other minor improvements.
- Add `closing_interval` parameter to `MDCardSwipe` class.
- Add implementation of elevation behavior on shaders.
- Add `validator` property to `MDTextField` class: the type of text field for entering Email, time, etc. Automatically sets the type of the text field as `error` if the user input does not match any of the set validation types.
- Add `theme_style_switch_animation` property to animate the colors of the application when switching the color scheme of the application ('*Dark/light*').
- Add `theme_style_switch_animation_duration` property to duration of the animation of switching the color scheme of the application ("*Dark/ light*").
- Fix memory leak when dynamically adding and removing *KivyMD* widgets.
- Fix `MDBottomNavigation` slide transition direction.
- Add a default value for the `icon` attribute of `MDApp` class.
- Add new properties to `MDFFileManager` class:
  - `icon_selection_button` - icon that will be used on the directory selection button;
  - `background_color_selection_button` - background color of the current directory/path selection button;
  - `background_color_toolbar` - background color of the file manager toolbar;
  - `icon_color` - color of the folder icon when the `preview` property is set to False;
- Add binds to `MDFloatingActionButtonSpeedDial` individual buttons;
- Add functionality for using multiple heroes.
- Add `shadow_softness_size` attribute (value of the softness of the shadow) to `CommonElevationBehavior` class.
- Optimize of `MDDatePicker` widget.

## 2.8.3 1.0.2

See on GitHub: [tag 1.0.2](#) | [compare 1.0.1/1.0.2](#)

```
pip install kivymd==1.0.2
```

- Bug fixes and other minor improvements.
- Added a button to copy the code to the documentation.
- Added the feature to view code examples of documentation in imperative and declarative styles.
- Added console scripts for developer tools.

## 2.8.4 1.0.1

See on GitHub: [tag 1.0.1](#) | [compare 1.0.0/1.0.1](#)

```
pip install kivymd==1.0.1
```

- Bug fixes and other minor improvements.
- Fix <https://github.com/kivymd/KivyMD/issues/1305>.

## 2.8.5 1.0.0

See on GitHub: [tag 1.0.0](#) | [compare 0.104.2/1.0.0](#)

```
pip install kivymd==1.0.0
```

- Bug fixes and other minor improvements.
- Added *ImageLeftWidgetWithoutTouch*, *ImageRightWidgetWithoutTouch*, *IconRightWidgetWithoutTouch*, *IconLeftWidgetWithoutTouch* classes to *kivymd/uix/list.py* module;
- Added **MDStepper** component;
- Added a feature, `show_disks` to the **MDFileManager** class, that allows you to display the disks and folders contained in them;
- Added `animation_tooltip_dismiss` function and `on_dismiss` event to **MDTooltip** class;
- Added **MDCOLORPicker** component;
- Added new **transition** package - a set of classes for implementing transitions between application screens;
- Now all modules from the **uix** directory are packages;
- Type hints have been added to the source code of the KivyMD library;
- Added `divider_color` attribute to **BaseListItem** class;
- Added `load_all_kv_files` method to **MDApp** class;
- Added **Templates** package - base classes for controlling the scale, rotation of the widget, etc.;
- Added *kivymd/tools/patterns* package - scripts for creating projects with design patterns;
- *FitImage* widget move from *kivymd.utils* to *kivymd.uix.fitimage*;
- Added `background_color_header`, `background_color_cell`, `background_color_selected_cell`, added methods for adding/removing rows to a common table to **MDDATAtable** widget;
- Added method for update rows to **MDDATAtable** class;
- Delete *kivymd/utils/hot\_reload\_viewer.py*;
- Added *kivymd/tools/hotreload* package;
- Added `top` value to position parameter of **MDDropdownMenu** class;
- Added `get_current_tab` method to **MDTabs** class;
- Added the feature to automatically create a virtual environment when creating a project using the *kivymd.tools.patterns.create\_project* tool;
- Added the feature to use the `left_icon` for **MDFextField** text fields;
- The design and behavior of the **MDChip** widget is close to the material design spec;

- Added the feature to set the thickness of the `MDProgressBar` class;
- Added localization support when creating a project using the `create_project` tool;
- Added support *Material Design v3*;
- Added support badge icon to `MDIcon` class;
- Added the feature to use a radius for the `BaseListItem` class;
- `MDFloatingActionButton` class configured according to M3 style;
- Ripple animation for round buttons customized to material design standards;
- Fix *Warning, too much iteration done before the next frame* for button classes;
- Added `FadingEdgeEffect` class
- Added `MDSliverAppBar` widget;
- Added the feature to use `custom icons` and `font name` for the `MDBottomNavigation` class;
- Rename `MDToolbarr` to `MDTopAppBar` class;
- The `overflow behavior` from the `ActionBar` class of the *Kivy* framework has been added to the `MDTopAppBar` class;
- Add `shift_right` and `shift_right` attributes to `MDTooltip` class;
- Fixed the size of the `MDIconButton` icon when changing `icon_size` on mobile devices;
- Add new `MDSegmentedControl` widget;
- Add `on_release/on_press` events to `MDSmartTile` class;
- Add `mipmap` property to `FitImage` class;
- Added the feature to use `Hero` animation;
- Added `MDResponsiveLayout` layout;
- Added `add_view` utility;
- Added the feature to create widgets in declarative programming style;

## 2.8.6 0.104.2

See on GitHub: [tag 0.104.2](#) | compare 0.104.1/0.104.2

```
pip install kivymd==0.104.2
```

- Bug fixes and other minor improvements.
- Add `HotReloadViewer` class
- Added features to `Snackbar` class: use padding, set custom button color, elevation
- Add `MDToggleButton` class
- Change to *Material Design Baseline* dark theme spec
- Fix *ReferenceError: weakly-referenced object no longer exists* when start demo application
- Changed the default value for the `theme_text_color` parameter in the `BaseButton` class (to the value “*Primary*”)
- Fix setting of the `text_color_normal` and `text_color_active` parameters - earlier their values did not affect anything

- Fixed the length of the right edge of the border in relation to the hint text when the *MDTextField* is in the *rectangle* mode
- Add *get\_tab\_list* method to *MDTabs* class
- Add hover behavior when using *MDDropdownMenu* class
- Added the feature to use the *FitImage* component to download images from the network
- The *elevation* value for *RectangularElevationBehavior* and *CircularElevationBehavior* classes after pressing was always set to 2 - fixed
- Methods that implement the ripple effect have always been called twice - fixed
- The *SmartTile* class now uses the *FitImage* class to display images instead of the *Image* class
- Removed dependency on *PIL* library
- Add *hint\_bg\_color*, *hint\_text\_color*, *hint\_radius* attributes to *MDSlider* class
- Delete *progressloader.py*
- Delete *context\_menu.py*
- Added the feature to control the properties of menu items during creation in *MDDropdownMenu* class
- Added the feature to change the number of buttons after creating the *MDFloatingActionButtonSpeedDial* object
- Added the feature to set the *font\_name* property for the *MDTabsLabel* class
- Add *MDCarousel* class
- Delete *kivymd/uix/useranimationcard.py*
- Added usage types for *MDNavigationDrawer* class: *modal/standard*
- Added stencil instructions to the *FitImage* class canvas
- Added *on\_ref\_press* and *switch\_tab* methods to *MDTabs* class
- Added *on\_release* method for menu item events instead of callback method to *MDDropdownMenu* class
- Added *palette* attribute - the feature to change the color of the *MDSpinner* when changing rotation cycles
- Added the feature to change the border color of the *MDRectangleFlatIconButton* class
- Add *MDRelativeLayout* class
- Added the feature to use radius for *MDNavigationDrawer* corners
- Removed *UserAnimationCard* class
- Added feature to set background color for *MDDialog* class
- Added *MDNavigationRail* component
- Added *MDSwiper* component
- Added ripple effect to *MDTabs* class
- Added the feature to set toast positions on an *Android* device
- Added of tooltips to *MDToolbar* icons
- Fixed *MDBottomAppBar* notch transparency
- Updated *MDDatePicker* class to material design specification.
- Updated *MDTimePicker* class to material design specification.
- Elevation behavior redesign to comply with the material design specification.

- Removed the *vendor* package.
- Added the feature to use a class instance (*Kivy* or *KivyMD* widget), which will be added to the *MDDropdownMenu* class menu header.

## 2.8.7 0.104.1

See on GitHub: [tag 0.104.1](#) | [compare 0.104.0/0.104.1](#)

```
pip install kivymd==0.104.1
```

- Bug fixes and other minor improvements.
- Added *MDGridLayout* and *MDBBoxLayout* classes
- Add *TouchBehavior* class
- Add *radius* parameter to *BackgroundColorBehavior* class
- Add *MDScreen* class
- Add *MDFloatLayout* class
- Added a *MDTextField* with *fill* mode
- Added a shadow, increased speed of opening, added the feature to control the position of the *MDDropdownMenu* class
- The *MDDropDownItem* class is now a regular element, such as a button
- Added the ability to use the texture of the icon on the right in any *MDTextField* classes
- Added the feature to use ripple and focus behavior in *MDCard* class
- *MDDialogs* class redesigned to meet material design requirements
- Added *MDDataTable* class

## 2.8.8 0.104.0

See on GitHub: [tag 0.104.0](#) | [compare 0.103.0/0.104.0](#)

```
pip install kivymd==0.104.0
```

- Fixed bug in *kivymd.uix.expansionpanel.MDExpansionPanel* if, with the panel open, without closing it, try to open another panel, then the chevron of the first panel remained open.
- The *kivymd.uix.textfield.MDTextFieldRound* class is now directly inherited from the *kivy.uix.textinput.TextInput* class.
- Removed *kivymd.uix.textfield.MDTextFieldClear* class.
- *kivymd.uix.navigationdrawer.NavigationLayout* allowed to add *kivymd.uix.toolbar.MDToolbar* class.
- Added feature to control range of dates to be active in *kivymd.uix.picker.MDDatePicker* class.
- Updated *kivymd.uix.navigationdrawer.MDNavigationDrawer* realization.
- Removed *kivymd.uix.card.MDCardPost* class.
- Added *kivymd.uix.card.MDCardSwipe* class.

- Added `switch_tab` method for switching tabs to `kivymd.uix.bottomnavigation.MDBottomNavigation` class.
- Added feature to use panel type in the `kivymd.uix.expansionpanel.MDExpansionPanel` class: `kivymd.uix.expansionpanel.MDExpansionPanelOneLine`, `kivymd.uix.expansionpanel.MDExpansionPanelTwoLine` or `kivymd.uix.expansionpanel.MDExpansionPanelThreeLine`.
- Fixed panel opening animation in the `kivymd.uix.expansionpanel.MDExpansionPanel` class.
- Delete `kivymd.uix.managerswiper.py`
- Add `MDFloatingActionButtonSpeedDial` class
- Added the feature to create text on tabs using markup, thereby triggering the `on_ref_press` event in the `MDTabLabel` class
- Added `color_indicator` attribute to set custom indicator color in the `MDTabs` class
- Added the feature to change the background color of menu items in the `BaseListItem` class
- Add `MDTapTargetView` class

## 2.8.9 0.103.0

See on GitHub: [tag 0.103.0](#) | [compare 0.102.1/0.103.0](#)

```
pip install kivymd==0.103.0
```

- Fix `MDSwitch` size according to *material design* guides
- Fix `MDSwitch`'s thumb position when size changes
- Fix position of the icon relative to the right edge of the `MDChip` class on mobile devices
- Updated `MDBottomAppBar` class.
- Updated `navigationdrawer.py`
- Added `on_tab_switch` method that is called when switching tabs (`MDTabs` class)
- Added `FpsMonitor` class
- Added `fitimage.py` - feature to automatically crop a *Kivy* image to fit your layout
- Added animation when changing the action button position mode in `MDBottomAppBar` class
- Delete `fanscreenmanager.py`
- Bug fixes and other minor improvements.

## 2.8.10 0.102.1

See on GitHub: [tag 0.102.1](#) | [compare 0.102.0/0.102.1](#)

```
pip install kivymd==0.102.1
```

- Implemented the ability [Backdrop](<https://material.io/components/backdrop>)
- Added `MDApp` class. Now app object should be inherited from `kivymd.app.MDApp`.
- Added `MDRoundImageButton` class.
- Added `MDTooltip` class.

- Added *MDBanner* class.
- Added hook for *PyInstaller* (add *hookspath=[kivymd.hooks\_path]*).
- Added examples of *spec* files for building [Kitchen Sink demo]([https://github.com/kivymd/KivyMD/tree/master/demos/kitchen\\_sink](https://github.com/kivymd/KivyMD/tree/master/demos/kitchen_sink)).
- Added some features to *MDProgressLoader*.
- Added feature to preview the current value of *MDSlider*.
- Added feature to use custom screens for dialog in *MDBottomSheet* class.
- Removed *MDPopupScreen*.
- Added [*studies*]([https://github.com/kivymd/KivyMD/tree/master/demos/kitchen\\_sink/studies](https://github.com/kivymd/KivyMD/tree/master/demos/kitchen_sink/studies)) directory for demos in Material Design.
- Bug fixes and other minor improvements.

## 2.8.11 0.102.0

See on GitHub: [tag 0.102.0](#) | [compare 0.101.8/0.102.0](#)

```
pip install kivymd==0.102.0
```

- Moved *kivymd.behaviors* to *kivymd.uix.behaviors*.
- Updated [Iconic font](<https://github.com/Templarian/MaterialDesign-Webfont>) (v4.5.95).
- Added *blank* icon to *icon\_definitions*.
- Bug fixes and other minor improvements.

## 2.8.12 0.101.8

See on GitHub: [tag 0.101.8](#) | [compare 0.101.7/0.101.8](#)

```
pip install https://github.com/kivymd/KivyMD/archive/0.101.8.zip
```

- Added *uix* and *behaviors* folder to *package\_data*.

## 2.8.13 0.101.7

See on GitHub: [tag 0.101.7](#) | [compare 0.101.6/0.101.7](#)

```
pip install https://github.com/kivymd/KivyMD/archive/0.101.7.zip
```

- Fixed colors and position of the buttons in the *Buttons* demo screen ([Kitchen Sink demo]([https://github.com/kivymd/KivyMD/tree/master/demos/kitchen\\_sink](https://github.com/kivymd/KivyMD/tree/master/demos/kitchen_sink))).
- Displaying percent of loading kv-files ([Kitchen Sink demo]([https://github.com/kivymd/KivyMD/tree/master/demos/kitchen\\_sink](https://github.com/kivymd/KivyMD/tree/master/demos/kitchen_sink))).

## 2.8.14 0.101.6

See on GitHub: [tag 0.101.6](#) | [compare 0.101.5/0.101.6](#)

```
pip install https://github.com/kivymd/KivyMD/archive/0.101.6.zip
```

- Fixed *NameError: name 'MDThemePicker' is not defined.*

## 2.8.15 0.101.5

See on GitHub: [tag 0.101.5](#) | [compare 0.101.4/0.101.5](#)

```
pip install https://github.com/kivymd/KivyMD/archive/0.101.5.zip
```

- Added feature to see source code of current example ([Kitchen Sink demo]([https://github.com/kivymd/KivyMD/tree/master/demos/kitchen\\_sink](https://github.com/kivymd/KivyMD/tree/master/demos/kitchen_sink))).
- Added names of authors of this fork ([Kitchen Sink demo]([https://github.com/kivymd/KivyMD/tree/master/demos/kitchen\\_sink](https://github.com/kivymd/KivyMD/tree/master/demos/kitchen_sink))).
- Bug fixes and other minor improvements.

## 2.8.16 0.101.4

See on GitHub: [tag 0.101.4](#) | [compare 0.101.3/0.101.4](#)

```
pip install https://github.com/kivymd/KivyMD/archive/0.101.4.zip
```

- Bug fixes and other minor improvements.

## 2.8.17 0.101.3

See on GitHub: [tag 0.101.3](#) | [compare 0.101.2/0.101.3](#)

```
pip install https://github.com/kivymd/KivyMD/archive/0.101.3.zip
```

- Bug fixes and other minor improvements.

## 2.8.18 0.101.2

See on GitHub: [tag 0.101.2](#) | [compare 0.101.1/0.101.2](#)

```
pip install https://github.com/kivymd/KivyMD/archive/0.101.2.zip
```

- Bug fixes and other minor improvements.

## 2.8.19 0.101.1

See on GitHub: [tag 0.101.1](#) | [compare 0.101.0/0.101.1](#)

```
pip install https://github.com/kivymd/KivyMD/archive/0.101.1.zip
```

- Bug fixes and other minor improvements.

## 2.8.20 0.101.0

See on GitHub: [tag 0.101.0](#) | [compare 0.100.2/0.101.0](#)

```
pip install https://github.com/kivymd/KivyMD/archive/0.101.0.zip
```

- Added *MDContextMenu* class.
- Added *MDExpansionPanel* class.
- Removed *MDAccordion* and *MDAccordionListItem*. Use *MDExpansionPanel* instead.
- Added *HoverBehavior* class by [Olivier POYEN](<https://gist.github.com/opqopq/15c707dc4cffc2b6455f>).
- Added markup support for buttons.
- Added *duration* property to *Toast*.
- Added *TextInput*'s events and properties to *MDTextFieldRound*.
- Added feature to resize text field
- Added color property to *MDSeparator* class
- Added [tool]([https://github.com/kivymd/KivyMD/blob/master/kivymd/tools/update\\_icons.py](https://github.com/kivymd/KivyMD/blob/master/kivymd/tools/update_icons.py)) for updating [Iconic font](<https://github.com/Templarian/MaterialDesign-Webfont>).
- Updated [Iconic font](<https://github.com/Templarian/MaterialDesign-Webfont>) (v4.3.95).
- Added new examples for [Kitchen Sink demo]([https://github.com/kivymd/KivyMD/tree/master/demos/kitchen\\_sink](https://github.com/kivymd/KivyMD/tree/master/demos/kitchen_sink)).
- Bug fixes and other minor improvements.

## 2.8.21 0.100.2

See on GitHub: [tag 0.100.2](#) | [compare 0.100.1/0.100.2](#)

```
pip install https://github.com/kivymd/KivyMD/archive/0.100.2.zip
```

- [Black](<https://github.com/psf/black>) formatting.

## 2.8.22 0.100.1

See on GitHub: [tag 0.100.1](#) | [compare 0.100.0/0.100.1](#)

```
pip install https://github.com/kivymd/KivyMD/archive/0.100.1.zip
```

- *MDUserAnimationCard* uses *Image* instead of *AsyncImage*.

## 2.8.23 0.100.0

See on GitHub: [tag 0.100.0](#) | [compare 0.99.99/0.100.0](#)

```
pip install https://github.com/kivymd/KivyMD/archive/0.100.0.zip
```

- Added feature to change color for *MDStackFloatingButtons*.

## 2.8.24 0.99.99.01

See on GitHub: [tag 0.99.99.01](#) | [compare 0.99.98/0.99.99.01](#)

```
pip install https://github.com/kivymd/KivyMD/archive/0.99.99.01.zip
```

- Fixed *MNavigationDrawer.use\_logo*.

## 2.8.25 0.99.99

See on GitHub: [tag 0.99.99](#) | [compare 0.99.99.01/0.99.99](#)

```
pip install https://github.com/kivymd/KivyMD/archive/0.99.99.zip
```

- Added *icon\_color* property for *NavigationDrawerIconButton*.

## 2.8.26 0.99.98

See on GitHub: [tag 0.99.98](#) | [compare 0.99.97/0.99.98](#)

```
pip install https://github.com/kivymd/KivyMD/archive/0.99.98.zip
```

- Added *MDFillRoundFlatButton* class.

## 2.8.27 0.99.97

See on GitHub: [tag 0.99.97](#) | [compare 0.99.96/0.99.97](#)

```
pip install https://github.com/kivymd/KivyMD/archive/0.99.97.zip
```

- Fixed *Spinner* animation.

## 2.8.28 0.99.96

See on GitHub: [tag 0.99.96](#) | [compare 0.99.95/0.99.96](#)

```
pip install https://github.com/kivymd/KivyMD/archive/0.99.96.zip
```

- Added *asynckivy* module by [Nattōsai Mitō](<https://github.com/gottadiveintopython/asynckivy>).

## 2.8.29 0.99.95

See on GitHub: [tag 0.99.95](#) | [compare 0.99.94/0.99.95](#)

```
pip install https://github.com/kivymd/KivyMD/archive/0.99.95.zip
```

- Added function to create a round image in *kivymd/utils/cropimage.py* module.
- Added *MDCustomRoundIconButton* class.
- Added demo application [Account Page](<https://www.youtube.com/watch?v=dfUOwqtYoYg>) for [Kitchen Sink demo]([https://github.com/kivymd/KivyMD/tree/master/demos/kitchen\\_sink](https://github.com/kivymd/KivyMD/tree/master/demos/kitchen_sink)).

## 2.8.30 0.99.94

See on GitHub: [tag 0.99.94](#) | [compare 0.99.93/0.99.94](#)

```
pip install https://github.com/kivymd/KivyMD/archive/0.99.94.zip
```

- Added *\_no\_ripple\_effect* property to *BaseListItem* class.
- Added check to use *ripple effect* in *RectangularRippleBehavior* class.
- [Disabled]([https://www.youtube.com/watch?v=P\\_9oSx0Pz\\_U](https://www.youtube.com/watch?v=P_9oSx0Pz_U)) using *ripple effect* in *MDAccordionListItem* class.

## 2.8.31 0.99.93

See on GitHub: [tag 0.99.93](#) | [compare 0.99.92/0.99.93](#)

```
pip install https://github.com/kivymd/KivyMD/archive/0.99.93.zip
```

- Updated [Iconic font](<https://github.com/Templarian/MaterialDesign-Webfont>) (v3.6.95).

## 2.8.32 0.99.92

See on GitHub: [tag 0.99.92](#) | [compare 0.99.91/0.99.92](#)

```
pip install https://github.com/kivymd/KivyMD/archive/0.99.92.zip
```

- Removed automatic change of text field length in *MDTextFieldRound* class.

## 2.9 About

### 2.9.1 License

Refer to [LICENSE](#).

#### MIT License

Copyright (c) 2022 Andrés Rodríguez and other contributors - KivyMD library up to  
version 0.1.2

Copyright (c) 2022 KivyMD Team and other contributors - KivyMD library version 0.1.3 and  
higher

Other libraries used in the project:

Copyright (c) 2010-2022 Kivy Team and other contributors

Copyright (c) 2022 Brian Knapp - Androidoast library

Copyright (c) 2022 LogicalDash - stiffscroll library

Copyright (c) 2022 Kivy Garden - tabs module

Copyright (c) 2022 Nattōsai Mitō - asynckivy module

Copyright (c) 2022 tshirtman - magic\_behavior module

Copyright (c) 2022 shashi278 - taptargetview module


Copyright (c) 2022 Benedikt Zwölfer - fitimage module

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

## 2.10 KivyMD

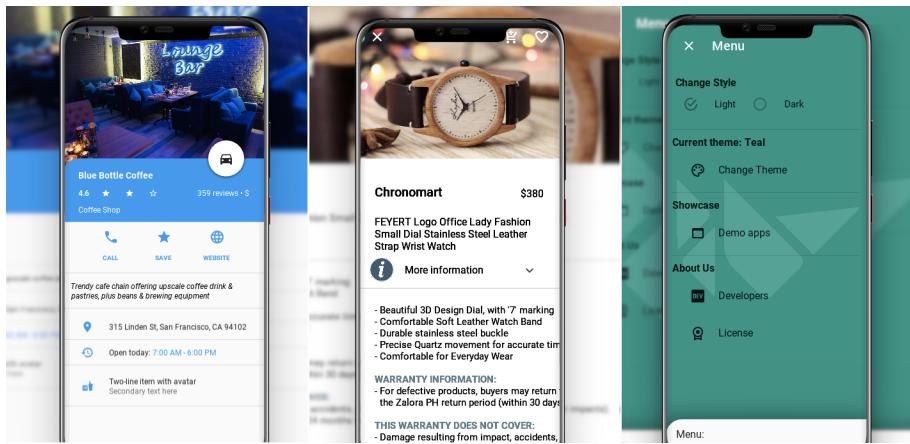

Is a collection of Material Design compliant widgets for use with, Kivy cross-platform graphical framework a framework for cross-platform, touch-enabled graphical applications. The project's goal is to approximate Google's [Material Design spec](#) as close as possible without sacrificing ease of use.

This library is a fork of the [KivyMD project](#). We found the strength and brought this project to a new level.

If you wish to become a project developer (permission to create branches on the project without forking for easier collaboration), have at least one PR approved and ask for it. If you contribute regularly to the project the role may be offered to you without asking too.

### 2.10.1 API - kivymd

```
kivymd.release = True
kivymd.path
    Path to KivyMD package directory.
kivymd.fonts_path
    Path to fonts directory.
kivymd.images_path
    Path to images directory.
kivymd.uix_path
    Path to uix directory.
kivymd.glsl_path
    Path to glsl directory.
```

## 2.10.2 Submodules

### Register KivyMD widgets to use without import.

Register KivyMD widgets to use without import.

#### API - `kivymd.factory_registers`

```
kivymd.factory_registers.register
```

### Material Resources

#### API - `kivymd.material_resources`

```
kivymd.material_resources.dp  
kivymd.material_resources.DEVICE_IOS  
kivymd.material_resources.DEVICE_TYPE = desktop  
kivymd.material_resources.MAX_NAV_DRAWER_WIDTH  
kivymd.material_resources.TOUCH_TARGET_HEIGHT
```

### Theming Dynamic Text

Two implementations. The first is based on color brightness obtained from- <https://www.w3.org/TR/AERT#color-contrast> The second is based on relative luminance calculation for sRGB obtained from- <https://www.w3.org/TR/2008/REC-WCAG20-20081211/#relativeluminancedef> and contrast ratio calculation obtained from- <https://www.w3.org/TR/2008/REC-WCAG20-20081211/#contrast-ratiodef>

Preliminary testing suggests color brightness more closely matches the *Material Design spec* suggested text colors, but the alternative implementation is both newer and the current ‘correct’ recommendation, so is included here as an option.

#### API - `kivymd.theming_dynamic_text`

```
kivymd.theming_dynamic_text.get_contrast_text_color(color, use_color_brightness=True)  
kivymd.theming_dynamic_text.color
```

## Effects

**API - kivymd.effects**

### Submodules

**kivymd.effects.fadingedge**

**API - kivymd.effects.fadingedge**

### Submodules

**kivymd.effects.roulettescroll**

**API - kivymd.effects.roulettescroll**

### Submodules

**kivymd.effects.stiffscroll**

**API - kivymd.effects.stiffscroll**


### Submodules

**kivymd.toast**

**API - kivymd.toast**

### Submodules

**Toast for Android device**

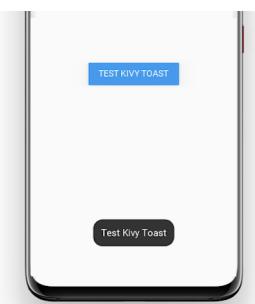

## API - kivymd.toast.androidtoast

### Submodules

#### AndroidToast

**Native implementation of toast for Android devices.**

```
# Will be automatically used native implementation of the toast
# if your application is running on an Android device.
# Otherwise, will be used toast implementation
# from the kivymd/toast/kivytoast package.

from kivy.lang import Builder
from kivy.uix.screenmanager import ScreenManager

from kivymd.toast import toast
from kivymd.app import MDApp

KV = '''
MDScreen:

    MDFlatButton:
        text: "My Toast"
        pos_hint:{'center_x': .5, 'center_y': .5}
        on_press: app.show_toast()
'''

class Test(MDApp):
    def build(self):
        return Builder.load_string(KV)

    def show_toast(self):
        toast("Hello World", True, 80, 200, 0)

Test().run()
```

## API - kivymd.toast.androidtoast.androidtoast

kivymd.toast.androidtoast.androidtoast(*text*, *length\_long=False*, *gravity=0*, *y=0*, *x=0*)

Displays a toast.

### Parameters

- **length\_long** – the amount of time (in seconds) that the toast is visible on the screen;
- **text** – text to be displayed in the toast;

- **short\_duration** – duration of the toast, if *True* the toast will last 2.3s but if it is *False* the toast will last 3.9s;
- **gravity** – refers to the toast position, if it is 80 the toast will be shown below, if it is 40 the toast will be displayed above;
- **y** – refers to the vertical position of the toast;
- **x** – refers to the horizontal position of the toast;

Important: if only the text value is specified and the value of the *gravity*, *y*, *x* parameters is not specified, their values will be 0 which means that the toast will be shown in the center.

## kivymd.toast.kivytoast

### API - kivymd.toast.kivytoast

#### Submodules

##### KivyToast

#### Implementation of toasts for desktop.

```
from kivy.lang import Builder

from kivymd.app import MDApp
from kivymd.toast import toast

KV = '''
MDScreen:

    MDTopAppBar:
        title: 'Test Toast'
        pos_hint: {'top': 1}
        left_action_items: [['menu', lambda x: x]]

    MDRaisedButton:
        text: 'TEST KIVY TOAST'
        pos_hint: {'center_x': .5, 'center_y': .5}
        on_release: app.show_toast()
'''

class Test(MDApp):
    def show_toast(self):
        '''Displays a toast on the screen.'''
        toast('Test Kivy Toast')

    def build(self):
```

(continues on next page)

(continued from previous page)

```
    return Builder.load_string(KV)

Test().run()
```

## API - kivymd.toast.kivytoast.kivytoast

**class kivymd.toast.kivytoast.kivytoast.Toast(\*\*kwargs)**

ModalView class. See module documentation for more information.

### Events

#### ***on\_pre\_open:***

Fired before the ModalView is opened. When this event is fired ModalView is not yet added to window.

#### ***on\_open:***

Fired when the ModalView is opened.

#### ***on\_pre\_dismiss:***

Fired before the ModalView is closed.

#### ***on\_dismiss:***

Fired when the ModalView is closed. If the callback returns True, the dismiss will be canceled.

Changed in version 1.11.0: Added events *on\_pre\_open* and *on\_pre\_dismiss*.

Changed in version 2.0.0: Added property ‘overlay\_color’.

Changed in version 2.1.0: Marked *attach\_to* property as deprecated.

### **duration**

The amount of time (in seconds) that the toast is visible on the screen.

*duration* is an **NumericProperty** and defaults to 2.5.

**label\_check\_texture\_size(self, instance\_label: Label, texture\_size: List[int])**

Resizes the text if the text texture is larger than the screen size. Sets the size of the toast according to the texture size of the toast text.

**toast(self, text\_toast: str)**

Displays a toast.

**on\_open(self)**

Default open event handler.

**fade\_in(self)**

Animation of opening toast on the screen.

**fade\_out(self, \*args)**

Animation of hiding toast on the screen.

**on\_touch\_down(self, touch)**

touch down event handler.

```
kivymd.toast.kivytoast.kivytoast.toast(text: str = "", background: list = None, duration: float = 2.5) →  
    None
```

Displays a toast.

#### Parameters

- **text** – text to be displayed in the toast;
- **duration** – the amount of time (in seconds) that the toast is visible on the screen
- **background** – toast background color in rgba format;

## kivymd.tools

### API - kivymd.tools

#### Submodules

##### kivymd.tools.argument\_parser

### API - kivymd.tools.argument\_parser

```
class kivymd.tools.argument_parser.ArgumentParserWithHelp(prog=None, usage=None,  
   description=None, epilog=None,  
   parents=[],  
   formatter_class=HelpFormatter,  
   prefix_chars='-',  
   fromfile_prefix_chars=None,  
   argument_default=None,  
   conflict_handler='error',  
   add_help=True, allow_abbrev=True,  
   exit_on_error=True)
```

Object for parsing command line strings into Python objects.

#### Keyword Arguments:

- **prog** – The name of the program (default:  
`os.path.basename(sys.argv[0])`)
- **usage** – A usage message (default: auto-generated from arguments)
- **description** – A description of what the program does
- **epilog** – Text following the argument descriptions
- **parents** – Parsers whose arguments should be copied into this one
- **formatter\_class** – HelpFormatter class for printing help messages
- **prefix\_chars** – Characters that prefix optional arguments
- **fromfile\_prefix\_chars** – Characters that prefix files containing additional arguments
- **argument\_default** – The default value for all arguments
- **conflict\_handler** – String indicating how to handle conflicts
- **add\_help** – Add a -h/-help option

- `allow_abbrev` – Allow long options to be abbreviated unambiguously
- **exit\_on\_error** – Determines whether or not ArgumentParser exits with error info when an error occurs

`parse_args(self, args=None, namespace=None)`

`error(self, message)`

`error(message: string)`

Prints a usage message incorporating the message to stderr and exits.

If you override this in a subclass, it should not return – it should either exit or raise an exception.

`format_help(self)`

### kivymd.tools.hotreload

#### API - kivymd.tools.hotreload

##### Submodules

##### HotReload

New in version 1.0.0.



**Hot reload tool - is a fork of the project <https://github.com/tito/kaki>**

---

**Note:** Since the project is not developing, we decided to include it in the KivyMD library and hope that the further development of the hot reload tool in the KivyMD project will develop faster.

---

---

This library enhance Kivy frameworks with opiniated features such as:

- Auto reloading kv or py (watchdog required, limited to some uses cases);
- Idle detection support;
- Foreground lock (Windows OS only);

## Usage

---

**Note:** See [create project with hot reload](#) for more information.

---

## TODO

- Add automatic reloading of Python classes;
- Add save application state on reloading;

## FIXME

- On Windows, hot reloading of Python files may not work;

### API - kivymd.tools.hotreload.app

`kivymd.tools.hotreload.app.original_argv`

`kivymd.tools.hotreload.app.monotonic`

`kivymd.tools.hotreload.app.PY3 = True`

#### `class kivymd.tools.hotreload.app.ExceptionClass`

Base handler that catches exceptions in `runTouchApp()`. You can subclass and extend it as follows:

```
class E(ExceptionHandler):
    def handle_exception(self, inst):
        Logger.exception('Exception caught by ExceptionHandler')
        return ExceptionManager.PASS

ExceptionManager.add_handler(E())
```

Then, all exceptions will be set to PASS, and logged to the console!

#### `handle_exception(self, inst)`

Called by `ExceptionManagerBase` to handle a exception.

Defaults to returning `ExceptionManager.RAISE` that re-raises the exception. Return `ExceptionManager.PASS` to indicate that the exception was handled and should be ignored.

This may be called multiple times with the same exception, if `ExceptionManager.RAISE` is returned as the exception bubbles through multiple kivy exception handling levels.

```
class kivymd.tools.hotreload.app.MDApp(**kwargs)
```

HotReload Application class.

#### DEBUG

Control either we activate debugging in the app or not. Defaults depend if ‘DEBUG’ exists in os.environ.

*DEBUG* is a [BooleanProperty](#).

#### FOREGROUND\_LOCK

If *True* it will require the foreground lock on windows.

*BACKGROUND\_LOCK* is a [BooleanProperty](#) and defaults to *False*.

#### KV\_FILES

List of KV files under management for auto reloader.

*KV\_FILES* is a [ListProperty](#) and defaults to `[]`.

#### KV\_DIRS

List of managed KV directories for autoloader.

*KV\_DIRS* is a [ListProperty](#) and defaults to `[]`.

#### AUTORELOADER\_PATHS

List of path to watch for auto reloading.

*AUTORELOADER\_PATHS* is a [ListProperty](#) and defaults to `([(".", {"recursive": True})])`.

#### AUTORELOADER\_IGNORE\_PATTERNS

List of extensions to ignore.

*AUTORELOADER\_IGNORE\_PATTERNS* is a [ListProperty](#) and defaults to `[*.pyc, *__pycache__*]`.

#### CLASSES

Factory classes managed by hotreload.

*CLASSES* is a [DictProperty](#) and defaults to `{}`.

#### IDLE\_DETECTION

Idle detection (if *True*, event `on_idle/on_wakeup` will be fired). Rearming idle can also be done with `rearm_idle()`.

*IDLE\_DETECTION* is a [BooleanProperty](#) and defaults to *False*.

#### IDLE\_TIMEOUT

Default idle timeout.

*IDLE\_TIMEOUT* is a [NumericProperty](#) and defaults to *60*.

#### RAISE\_ERROR

Raise error. When the *DEBUG* is activated, it will raise any error instead of showing it on the screen. If you still want to show the error when not in *DEBUG*, put this to *False*.

*RAISE\_ERROR* is a [BooleanProperty](#) and defaults to *True*.

#### build(*self*)

Initializes the application; it will be called only once. If this method returns a widget (tree), it will be used as the root widget and added to the window.

##### Returns

None or a root [Widget](#) instance if no `self.root` exists.

**get\_root(self)**

Return a root widget, that will contains your application. It should not be your application widget itself, as it may be destroyed and recreated from scratch when reloading.

By default, it returns a RelativeLayout, but it could be a Viewport.

**get\_root\_path(self)**

Return the root file path.

**abstract build\_app(self, first=False)**

Must return your application widget.

If *first* is set, it means that will be your first time ever that the application is built. Act according to it.

**unload\_app\_dependencies(self)**

Called when all the application dependencies must be unloaded. Usually happen before a reload

**load\_app\_dependencies(self)**

Load all the application dependencies. This is called before rebuild.

**rebuild(self, \*args, \*\*kwargs)****set\_error(self, exc, tb=None)****bind\_key(self, key, callback)**

Bind a key (keycode) to a callback (cannot be unbind).

**property appname(self)**

Return the name of the application class.

**enable\_autoreload(self)**

Enable autoreload manually. It is activated automatically if “DEBUG” exists in environ. It requires the *watchdog* module.

**prepare\_foreground\_lock(self)**

Try forcing app to front permanently to avoid windows pop ups and notifications etc.app.

Requires fake full screen and borderless.

**Note:** This function is called automatically if *BACKGROUND\_LOCK* is set

**set\_widget(self, wid)**

Clear the root container, and set the new approot widget to *wid*.

**apply\_state(self, state)**

Whatever the current state is, reapply the current state.

**install\_idle(self, timeout=60)**

Install the idle detector. Default timeout is 60s. Once installed, it will check every second if the idle timer expired. The timer can be rearm using *rearm\_idle()*.

**rearm\_idle(self, \*args)**

Rearm the idle timer.

**patch\_builder(self)****on\_idle(self, \*args)**

Event fired when the application enter the idle mode.

**on\_wakeup(self, \*args)**  
Event fired when the application leaves idle mode.

### kivymd.tools.packaging

#### API - kivymd.tools.packaging

##### Submodules

##### PyInstaller hooks

Add hookspath=[kivymd.hooks\_path] to your .spec file.

##### Example of .spec file

```
# -*- mode: python ; coding: utf-8 -*-

import sys
import os

from kivy_deps import sdl2, glew

from kivymd import hooks_path as kivymd_hooks_path

path = os.path.abspath(".")

a = Analysis(
    ["main.py"],
    pathex=[path],
    hookspath=[kivymd_hooks_path],
    win_no_prefer_redirects=False,
    win_private_assemblies=False,
    cipher=None,
    noarchive=False,
)
pyz = PYZ(a.pure, a.zipped_data, cipher=None)

exe = EXE(
    pyz,
    a.scripts,
    a.binaries,
    a.zipfiles,
    a.datas,
    *[Tree(p) for p in (sdl2.dep_bins + glew.dep_bins)],
    debug=False,
    strip=False,
    upx=True,
    name="app_name",
```

(continues on next page)

(continued from previous page)

```
    console=True,  
)
```

## API - `kivymd.tools.packaging.pyinstaller`

### `kivymd.tools.packaging.pyinstaller.hooks_path`

Path to hook directory to use with PyInstaller. See `kivymd.tools.packaging.pyinstaller` for more information.

`kivymd.tools.packaging.pyinstaller.get_hook_dirs()`

`kivymd.tools.packaging.pyinstaller.get_pyinstaller_tests()`

## Submodules

### PyInstaller hook for KivyMD

Adds fonts, images and KV files to package.

All modules from uix directory are added by Kivy hook.

## API - `kivymd.tools.packaging.pyinstaller.hook-kivymd`

`kivymd.tools.packaging.pyinstaller.hook-kivymd.datas = [None, None, None]`

## `kivymd.tools.patterns`

### API - `kivymd.tools.patterns`

## Submodules

### The script creates a new View package

The script creates a new View package in an existing project with an MVC template created using the `create_project` utility.

New in version 1.0.0.

#### See also:

Utility `create_project`

### Use a clean architecture for your applications.

To add a new view to an existing project that was created using the *create\_project* utility, use the following command:

```
kivymd.add_view \
    name_pattern \
    path_to_project \
    name_view
```

Example command:

```
kivymd.add_view \
    MVC \
    /Users/macbookair/Projects \
    NewScreen
```

You can also add new views with responsive behavior to an existing project:

```
kivymd.add_view \
    MVC \
    /Users/macbookair/Projects \
    NewScreen \
    --use_responsive yes
```

For more information about adaptive design, see here.

#### API - `kivymd.tools.patterns.add_view`

`kivymd.tools.patterns.add_view.main()`

The function of adding a new view to the project.


#### Script creates a project with the MVC pattern

New in version 1.0.0.

See also:

[MVC pattern](#)

### Use a clean architecture for your applications.

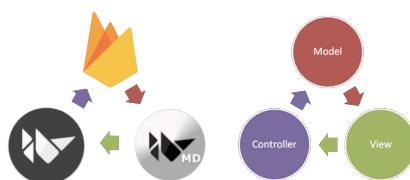

Use a clean architecture for your applications. KivyMD allows you to quickly create a project template with the MVC pattern. So far, this is the only pattern that this utility offers. You can also include database support in your project. At the moment, support for the Firebase database (the basic implementation of the real time database) and RestDB (the full implementation) is available.

## Project creation

Template command:

```
kivymd.create_project \
    name_pattern \
    path_to_project \
    name_project \
    python_version \
    kivy_version
```

Example command:


```
kivymd.create_project \
    MVC \
    /Users/macbookair/Projects \
    MyMVCProject \
    python3.10 \
    2.1.0
```

This command will by default create a project with an MVC pattern. Also, the project will create a virtual environment with Python 3.10, Kivy version 2.1.0 and KivyMD master version.

---

**Note:** Please note that the Python version you specified must be installed on your computer.

---

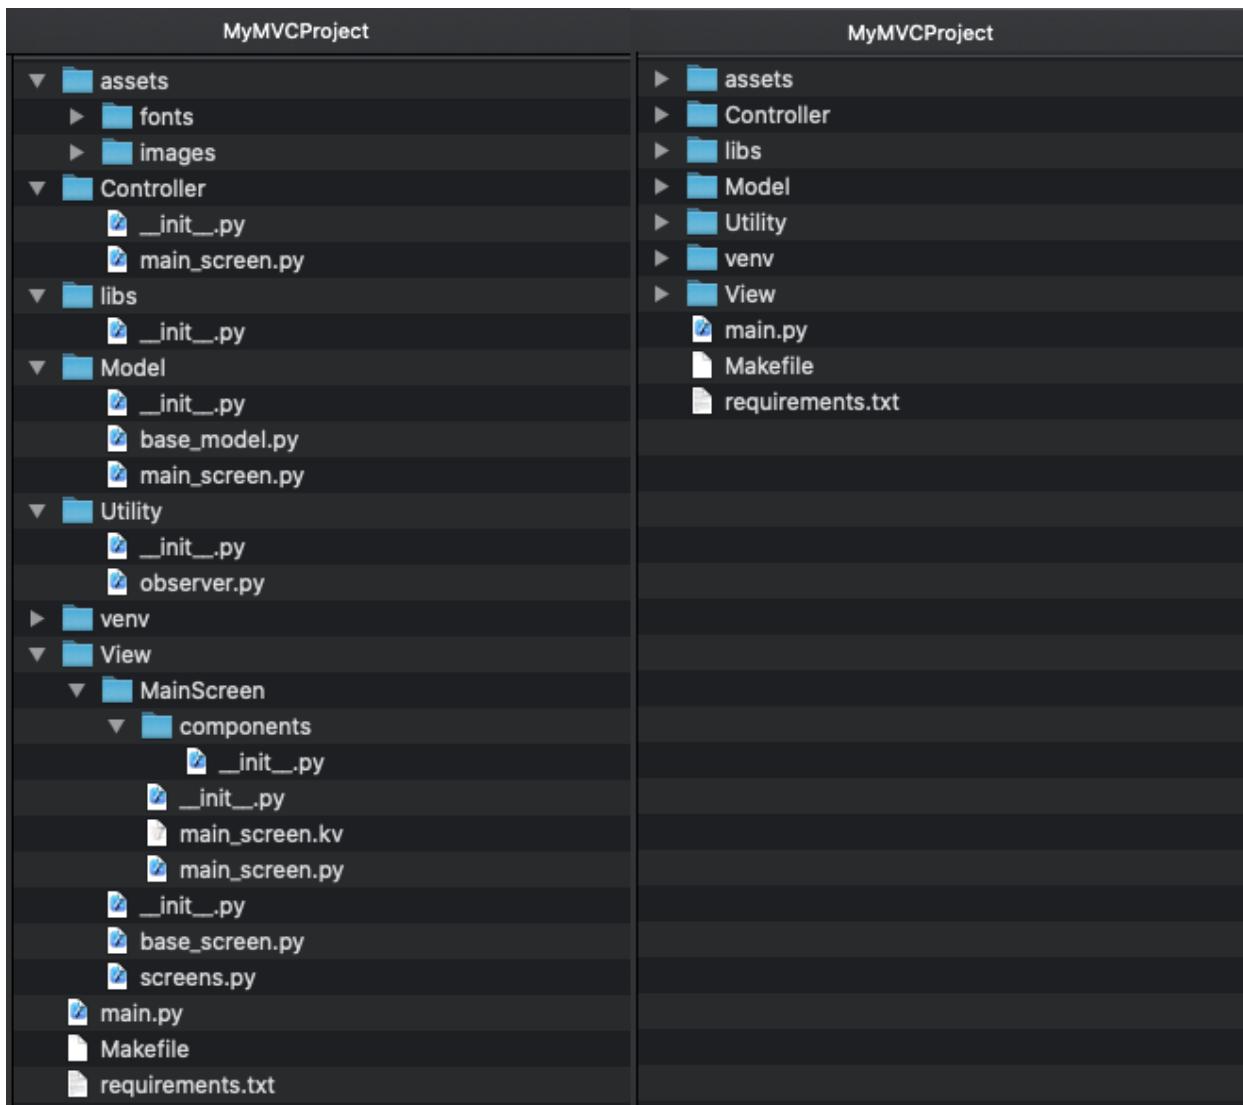

## Creating a project using a database

---

**Note:** Note that in the following command, you can use one of two database names: ‘firebase’ or ‘restdb’.

---


Template command:

```
kivymd.create_project \
    name_pattern \
    path_to_project \
    name_project \
    python_version \
    kivy_version \
    --name_database
```

Example command:

```
kivymd.create_project \
    MVC \
    /Users/macbookair/Projects \
    MyMVCProject \
    python3.10 \
    2.1.0 \
    --name_database restdb
```

This command will create a project with an MVC template by default. The project will also create a virtual environment with Python 3.10, Kivy version 2.1.0, KivyMD master version and a wrapper for working with the database restdb.io.

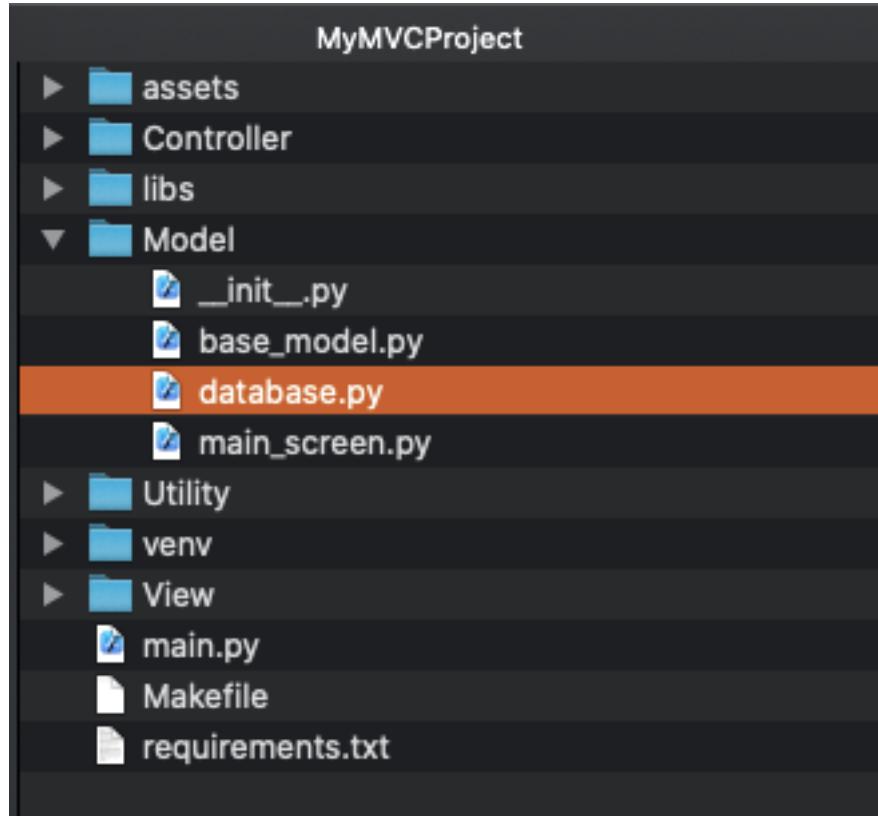

```
class DataBase:
    def __init__(self):
        database_url = "https://restdbio-5498.restdb.io"
        api_key = "7ce258d66f919d3a891d1166558765f0b4dbd"
```

---

**Note:** Please note that *database.py* the shell in the *DataBase* class uses the *database\_url* and *api\_key* parameters on the test database (works only in read mode), so you should use your data for the database.

---

## Create project with hot reload

Template command:

```
kivymd.create_project \
    name_pattern \
    path_to_project \
    name_project \
    python_version \
    kivy_version \
    --use_hotreload
```

Example command:

```
kivymd.create_project \
    MVC \
    /Users/macbookair/Projects \
    MyMVCProject \
    python3.10 \
    2.1.0 \
    --use_hotreload yes
```

After creating the project, open the file *main.py*, there is a lot of useful information. Also, the necessary information is in other modules of the project in the form of comments. So do not forget to look at the source files of the created project.

## Create project with responsive view

When creating a project, you can specify which views should use responsive behavior. To do this, specify the name of the view/views in the *--use\_responsive* argument:

Template command:

```
kivymd.create_project \
    name_pattern \
    path_to_project \
    name_project \
    python_version \
    kivy_version \
    --name_screen FirstScreen SecondScreen ThirdScreen \
    --use_responsive FirstScreen SecondScreen
```

The *FirstScreen* and *SecondScreen* views will be created with an responsive architecture. For more detailed information about using the adaptive view, see the [MDResponsiveLayout](#) widget.

## Others command line arguments

### Required Arguments

- **pattern**
  - the name of the pattern with which the project will be created
- **directory**
  - directory in which the project will be created
- **name**
  - project name
- **python\_version**
  - the version of Python (specify as *python3.9* or *python3.8*) with
  - which the virtual environment will be created
- **kivy\_version**
  - version of Kivy (specify as *2.1.0* or *master*) that will be used in the project

### Optional arguments

- **name\_screen**
  - the name of the class which be used when creating the project pattern

When you need to create an application template with multiple screens, use multiple values separated by a space for the *name\_screen* parameter, for example, as shown below:

Template command:

```
kivymd.create_project \
    name_pattern \
    path_to_project \
    name_project \
    python_version \
    kivy_version \
    --name_screen FirstScreen SecondScreen ThirdScreen
```

- **name\_database**
  - provides a basic template for working with the ‘firebase’ library
  - or a complete implementation for working with a database ‘restdb.io’
- **use\_hotreload**
  - creates a hot reload entry point to the application
- **use\_localization**
  - creates application localization files
- **use\_responsive**
  - the name/names of the views to be used by the responsive UI

**Warning:** On Windows, hot reloading of Python files may not work. But, for example, there is no such problem in macOS. If you fix this, please report it to the KivyMD community.

### API - `kivymd.tools.patterns.create_project`

```
kivymd.tools.patterns.create_project.main()
```

Project creation function.

### `kivymd.tools.patterns.MVC`

#### API - `kivymd.tools.patterns.MVC`

##### Submodules

###### `kivymd.tools.patterns.MVC.Model`

###### API - `kivymd.tools.patterns.MVC.Model`

##### Submodules

###### `kivymd.tools.patterns.MVC.Model.database_firebase`

###### API - `kivymd.tools.patterns.MVC.Model.database_firebase`

```
kivymd.tools.patterns.MVC.Model.database_firebase.get_connect(func, host='8.8.8.8', port=53,  
timeout=3)
```

Checks for an active Internet connection.

###### `class kivymd.tools.patterns.MVC.Model.database_firebase.DataBase`

Your methods for working with the database should be implemented in this class.

```
name = Firebase
```

```
get_data_from_collection(self, name_collection: str)
```

Returns data of the selected collection from the database.

### Restdb.io API Wrapper

This package is an API Wrapper for the website [restdb.io](https://restdb.io), which allows for online databases.

### API - kivymd.tools.patterns.MVC.Model.database\_restdb

```
kivymd.tools.patterns.MVC.Model.database_restdb.get_connect(func, host='8.8.8.8', port=53,  
                           timeout=3)
```

Checks for an active Internet connection.

```
class kivymd.tools.patterns.MVC.Model.database_restdb.DataBase
```

```
    name = RestDB
```

```
    upload_file(self, path_to_file: str)
```

Uploads a file to the database. You can upload a file to the database only from a paid account.

```
    get_data_from_collection(self, collection_address: str)
```

Returns data of the selected collection from the database.

```
    delete_doc_from_collection(self, collection_address: str)
```

Delete data of the selected collection from the database.

#### Parameters

collection\_address – “database\_url/id\_collection”.

```
    add_doc_to_collection(self, data: dict, collection_address: str)
```

Add collection to the database.

```
    edit_data(self, collection: dict, collection_address: str, collection_id: str)
```

Modifies data in a collection of data in a database.

## kivymd.tools.patterns.MVC.libs

### API - kivymd.tools.patterns.MVC.libs

#### Submodules

### kivymd.tools.patterns.MVC.libs.translation

#### API - kivymd.tools.patterns.MVC.libs.translation

```
class kivymd.tools.patterns.MVC.libs.translation.Translation(defaultlang, domian, resource_dir)
```

Original source - <https://github.com/tito/kivy-gettext-example>.

```
    observers = []
```

```
    fbind(self, name, func, args, **kwargs)
```

```
    funbind(self, name, func, args, **kwargs)
```

```
    switch_lang(self, lang)
```

### kivymd.tools.release

#### API - kivymd.tools.release

##### Submodules

#### kivymd.tools.release.git\_commands

#### API - kivymd.tools.release.git\_commands

`kivymd.tools.release.git_commands.command(cmd: list, capture_output: bool = False) → str`

Run system command.

`kivymd.tools.release.git_commands.get_previous_version() → str`

Returns latest tag in git.

`kivymd.tools.release.git_commands.git_clean(ask: bool = True)`

Clean git repository from untracked and changed files.

`kivymd.tools.release.git_commands.git_commit(message: str, allow_error: bool = False, add_files: list = None)`

Make commit.

`kivymd.tools.release.git_commands.git_tag(name: str)`

Create tag.

`kivymd.tools.release.git_commands.git_push(branches_to_push: list, ask: bool = True, push: bool = False)`

Push all changes.

### Script to make release

Run this script before release (before deploying).

What this script does:

- Undo all local changes in repository
- Update version in `__init__.py`, `README.md`
- Format files
- Rename file “unreleased.rst” to version, add to index.rst
- Commit “Version ...”
- Create tag
- Add `unreleased.rst` to Changelog, add to `index.rst`
- Commit
- Git push

### API - kivymd.tools.release.make\_release

`kivymd.tools.release.make_release.run_pre_commit()`

Run pre-commit.

`kivymd.tools.release.make_release.replace_in_file(pattern, repl, file)`

Replace one *pattern* match to *repl* in file *file*.

`kivymd.tools.release.make_release.update_init_py(version, is_release, test: bool = False)`

Change version in *kivymd/\_init\_.py*.

`kivymd.tools.release.make_release.update_readme(previous_version, version, test: bool = False)`

Change version in *README.md*.

`kivymd.tools.release.make_release.move_changelog(index_file, unreleased_file, previous_version, version_file, version, test: bool = False)`

Edit unreleased.rst and rename to <version>.rst.

`kivymd.tools.release.make_release.create_unreleased_changelog(index_file, unreleased_file, version, ask: bool = True, test: bool = False)`

Create unreleased.rst by template.

`kivymd.tools.release.make_release.main()`

`kivymd.tools.release.make_release.create_argument_parser()`

### Tool for updating Iconic font

Downloads archive from <https://github.com/Templarian/MaterialDesign-Webfont> and updates font file with icon\_definitions.

### API - kivymd.tools.release.update\_icons

`kivymd.tools.release.update_icons.kivymd_path`

`kivymd.tools.release.update_icons.font_path`

`kivymd.tools.release.update_icons.icon_definitions_path`

`kivymd.tools.release.update_icons.font_version = master`

`kivymd.tools.release.update_icons.url`

`kivymd.tools.release.update_icons.temp_path`

`kivymd.tools.release.update_icons.temp_repo_path`

`kivymd.tools.release.update_icons.temp_font_path`

`kivymd.tools.release.update_icons.temp_preview_path`

`kivymd.tools.release.update_icons.re_icons_json`

```
kivymd.tools.release.update_icons.re_additional_icons
kivymd.tools.release.update_icons.re_version
kivymd.tools.release.update_icons.re_quote_keys
kivymd.tools.release.update_icons.re_icon_definitions
kivymd.tools.release.update_icons.re_version_in_file
kivymd.tools.release.update_icons.download_file(url, path)
kivymd.tools.release.update_icons.unzip_archive(archive_path, dir_path)
kivymd.tools.release.update_icons.get_icons_list()
kivymd.tools.release.update_icons.make_icon_definitions(icons)
kivymd.tools.release.update_icons.export_icon_definitions(icon_definitions, version)
kivymd.tools.release.update_icons.update_icons(make_commit: bool = False)
kivymd.tools.release.update_icons.main()
```

## kivymd.uix

### API - kivymd.uix

```
class kivymd.uix.MDAdaptiveWidget(**kwargs)
```

#### adaptive\_height

If *True*, the following properties will be applied to the widget:

```
size_hint_y: None
height: self.minimum_height
```

*adaptive\_height* is an `BooleanProperty` and defaults to *False*.

#### adaptive\_width

If *True*, the following properties will be applied to the widget:

```
size_hint_x: None
width: self.minimum_width
```

*adaptive\_width* is an `BooleanProperty` and defaults to *False*.

#### adaptive\_size

If *True*, the following properties will be applied to the widget:

```
size_hint: None, None
size: self.minimum_size
```

*adaptive\_size* is an `BooleanProperty` and defaults to *False*.

```
on_adaptive_height(self, md_widget, value: bool)
```

```
on_adaptive_width(self, md_widget, value: bool)
```

```
on_adaptive_size(self, md_widget, value: bool)
```

**Submodules****kivymd.uix.backdrop****API - kivymd.uix.backdrop****Submodules****kivymd.uix.banner****API - kivymd.uix.banner****Submodules****Behaviors**

Modules and classes implementing various behaviors for buttons etc.

**API - kivymd.uix.behaviors****Submodules****kivymd.uix.bottomnavigation****API - kivymd.uix.bottomnavigation****Submodules****kivymd.uix.bottomsheet****API - kivymd.uix.bottomsheet****Submodules****kivymd.uix.button****API - kivymd.uix.button****Submodules****kivymd.uix.card****API - kivymd.uix.card**

## Submodules

[kivymd.uix.chip](#)

[API - kivymd.uix.chip](#)

## Submodules

[Controllers](#)

New in version 1.0.0.

Modules and classes that implement useful methods for getting information about the state of the current application window.

[API - kivymd.uix.controllers](#)

## Submodules

[kivymd.uix.datatables](#)

[API - kivymd.uix.datatables](#)

## Submodules

[kivymd.uix.dialog](#)

[API - kivymd.uix.dialog](#)

## Submodules

[kivymd.uix.dropdownitem](#)

[API - kivymd.uix.dropdownitem](#)

## Submodules

[kivymd.uix.expansionpanel](#)

[API - kivymd.uix.expansionpanel](#)

## Submodules

[kivymd.uix.filemanager](#)

**API - kivymd.uix.filemanager**

**Submodules**

**kivymd.uix.fitimage**

**API - kivymd.uix.fitimage**

**Submodules**

**kivymd.uix.imagelist**

**API - kivymd.uix.imagelist**

**Submodules**

**kivymd.uix.label**

**API - kivymd.uix.label**

**Submodules**

**kivymd.uix.list**

**API - kivymd.uix.list**

**Submodules**

**kivymd.uix.menu**

**API - kivymd.uix.menu**

**Submodules**

**kivymd.uix.navigationdrawer**

**API - kivymd.uix.navigationdrawer**

**Submodules**

**kivymd.uix.navigationrail**

**API - kivymd.uix.navigationrail**

**Submodules**

**kivymd.uix.pickers**

**API - kivymd.uix.pickers**

**Submodules**

**kivymd.uix.pickers.colorpicker**

**API - kivymd.uix.pickers.colorpicker**

**Submodules**

**kivymd.uix.pickers.datepicker**

**API - kivymd.uix.pickers.datepicker**

**Submodules**

**kivymd.uix.pickers.timepicker**

**API - kivymd.uix.pickers.timepicker**

**Submodules**

**kivymd.uix.progressbar**

**API - kivymd.uix.progressbar**

**Submodules**

**kivymd.uix.refreshlayout**

**API - kivymd.uix.refreshlayout**

**Submodules**

**kivymd.uix.segmentedcontrol**

**API - kivymd.uix.segmentedcontrol**

**Submodules**

**kivymd.uix.selection**

**API - kivymd.uix.selection**

## Submodules

[kivymd.uix.selectioncontrol](#)

**API - kivymd.uix.selectioncontrol**

## Submodules

[kivymd.uix.slider](#)

**API - kivymd.uix.slider**

## Submodules

[kivymd.uix.sliverappbar](#)

**API - kivymd.uix.sliverappbar**

## Submodules

[kivymd.uix.snackbar](#)

**API - kivymd.uix.snackbar**

## Submodules

[kivymd.uix.spinner](#)

**API - kivymd.uix.spinner**

## Submodules

[kivymd.uix.swiper](#)

**API - kivymd.uix.swiper**

## Submodules

[kivymd.uix.tab](#)

**API - kivymd.uix.tab**

## Submodules

## Templates

Base classes for controlling the scale, rotation of the widget, etc.

### API - `kivymd.uix.templates`

#### Submodules

##### `kivymd.uix.templates.rotatewidget`

### API - `kivymd.uix.templates.rotatewidget`

#### Submodules

##### `kivymd.uix.templates.scalewidget`

### API - `kivymd.uix.templates.scalewidget`

#### Submodules

##### `kivymd.uix.templates.stencilwidget`

### API - `kivymd.uix.templates.stencilwidget`

#### Submodules

##### `kivymd.uix.textfield`

### API - `kivymd.uix.textfield`

#### Submodules

##### `kivymd.uix.toolbar`

### API - `kivymd.uix.toolbar`

#### Submodules

##### `kivymd.uix.tooltip`

### API - `kivymd.uix.tooltip`

#### Submodules

## kivymd.uix.transition

### API - kivymd.uix.transition

#### Submodules

## kivymd.utils

### API - kivymd.utils

#### Submodules

## asynckivy

Copyright (c) 2019 Nattōsai Mitō

#### GitHub -

<https://github.com/gottadiveintopython>

#### GitHub Gist -

<https://gist.github.com/gottadiveintopython/5f4a775849f9277081c396de65dc57c1>

### API - kivymd.utils.asynckivy

```
kivymd.utils.asynckivy.start(coro)
kivymd.utils.asynckivy.sleep(duration)
class kivymd.utils.asynckivy.event(ed, name)
    bind(self, step_coro)
    callback(self, *args, **kwargs)
```

## Monitor module

The Monitor module is a toolbar that shows the activity of your current application :

- FPS

### API - kivymd.utils.fpsmonitor

```
class kivymd.utils.FpsMonitor(**kwargs)
```

Label class, see module documentation for more information.

#### Events

##### *on\_ref\_press*

Fired when the user clicks on a word referenced with a [ref] tag in a text markup.

##### **updated\_interval**

FPS refresh rate.

##### **start(self)**

##### **update\_fps(self, \*args)**


### kivymd.utils.set\_bars\_colors

### API - kivymd.utils.set\_bars\_colors

```
kivymd.utils.set_bars_colors.set_bars_colors(status_bar_color: Union[None, list],  
  navigation_bar_color: Union[None, list], icons_color: str  
  = 'Light')
```

Sets the color of the status of the StatusBar and NavigationBar.

**Warning:** Works only on Android devices.

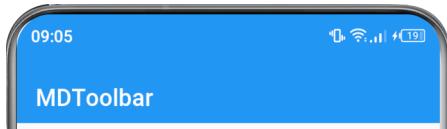

```
from kivy.lang import Builder  
  
from kivymd.app import MDApp  
from kivymd.utils.set_bars_colors import set_bars_colors  
  
KV = '''  
MDBoxLayout:  
    orientation: "vertical"  
  
    MDTopAppBar:  
        title: "MDTopAppBar"  
  
    MDBottomNavigation:  
        panel_color: app.theme_cls.primary_color  
        text_color_active: .2, .2, .2, 1  
        text_color_normal: .9, .9, .9, 1  
        use_text: False
```

(continues on next page)

(continued from previous page)

```

MDBottomNavigationItem:
    icon: 'gmail'

MDBottomNavigationItem:
    icon: 'twitter'


MDBottomNavigationItem:
    icon: 'youtube'
...
 

class Test(MDApp):
    def build(self):
        self.set_bars_colors()
        return Builder.load_string(KV)

    def set_bars_colors(self):
        set_bars_colors(
            self.theme_cls.primary_color, # status bar color
            self.theme_cls.primary_color, # navigation bar color
            "Light", # icons color of status bar
        )

Test().run()

```

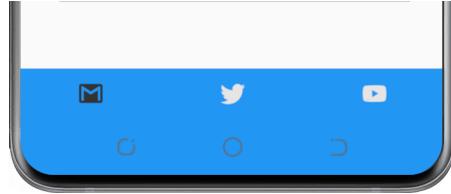


### Dark icon mode

```

def set_bars_colors(self):
    set_bars_colors(
        self.theme_cls.primary_color, # status bar color
        self.theme_cls.primary_color, # navigation bar color
        "Dark", # icons color of status bar
    )

```

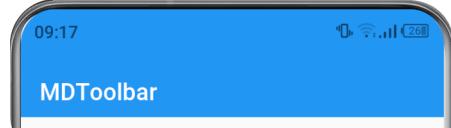

New in version 1.0.0.



---

CHAPTER  
**THREE**

---

## **INDICES AND TABLES**

- genindex
- modindex
- search



## PYTHON MODULE INDEX

### k

kivymd, 537  
kivymd.app, 27  
kivymd.color\_definitions, 29  
kivymd.effects, 539  
kivymd.effects.fadingedge, 539  
kivymd.effects.fadingedge.fadingedge, 519  
kivymd.effects.roulettescroll, 539  
kivymd.effects.roulettescroll.roulettescroll, 521  
kivymd.effects.stiffscroll, 539  
kivymd.effects.stiffscroll.stiffscroll, 518  
kivymd.factory\_registers, 538  
kivymd.font\_definitions, 35  
kivymd.icon\_definitions, 32  
kivymd.material\_resources, 538  
kivymd.theming, 7  
kivymd.theming\_dynamic\_text, 538  
kivymd.toast, 539  
kivymd.toast.androidtoast, 539  
kivymd.toast.androidtoast.androidtoast, 540  
kivymd.toast.kivytoast, 541  
kivymd.toast.kivytoast.kivytoast, 541  
kivymd.tools, 543  
kivymd.tools.argument\_parser, 543  
kivymd.tools.hotreload, 544  
kivymd.tools.hotreload.app, 544  
kivymd.tools.packaging, 548  
kivymd.tools.packaging.pyinstaller, 548  
kivymd.tools.packaging.pyinstaller.hook-kivymd, 549  
kivymd.tools.patterns, 549  
kivymd.tools.patterns.add\_view, 549  
kivymd.tools.patterns.create\_project, 550  
kivymd.tools.patterns.MVC, 556  
kivymd.tools.patterns.MVC.libs, 557  
kivymd.tools.patterns.MVC.libs.translation, 557  
kivymd.tools.patterns.MVC.Model, 556  
kivymd.tools.patterns.MVC.Model.database\_firebase, 556  
kivymd.tools.patterns.MVC.Model.database\_restdb, 556  
kivymd.tools.release, 558  
kivymd.tools.release.git\_commands, 558  
kivymd.tools.release.make\_release, 558  
kivymd.tools.release.update\_icons, 559  
kivymd.uix, 560  
kivymd.uix.anchorlayout, 36  
kivymd.uix.backdrop, 561  
kivymd.uix.backdrop.backdrop, 157  
kivymd.uix.banner, 561  
kivymd.uix.banner.banner, 221  
kivymd.uix.behaviors, 561  
kivymd.uix.behaviors.backgroundcolor\_behavior, 490  
kivymd.uix.behaviors.declarative\_behavior, 483  
kivymd.uix.behaviors.elevation, 498  
kivymd.uix.behaviors.focus\_behavior, 516  
kivymd.uix.behaviors.hover\_behavior, 479  
kivymd.uix.behaviors.magic\_behavior, 496  
kivymd.uix.behaviors.ripple\_behavior, 491  
kivymd.uix.behaviors.rotate\_behavior, 514  
kivymd.uix.behaviors.scale\_behavior, 474  
kivymd.uix.behaviors.stencil\_behavior, 481  
kivymd.uix.behaviors.toggle\_behavior, 476  
kivymd.uix.behaviors.touch\_behavior, 473  
kivymd.uix.bottomnavigation, 561  
kivymd.uix.bottomnavigation.bottomnavigation, 430  
kivymd.uix.bottomsheet, 561  
kivymd.uix.bottomsheet.bottomsheet, 140  
kivymd.uix.boxlayout, 61  
kivymd.uix.button, 561  
kivymd.uix.button.button, 114  
kivymd.uix.card, 561  
kivymd.uix.card.card, 226  
kivymd.uix.carousel, 78  
kivymd.uix.chip, 562  
kivymd.uix.chip.chip, 464  
kivymd.uix.circularlayout, 56  
kivymd.uix.controllers, 562  
kivymd.uix.controllers.windowcontroller, 472

kivymd.uix.datatables, 562  
kivymd.uix.datatables.datatables, 90  
kivymd.uix.dialog, 562  
kivymd.uix.dialog.dialog, 405  
kivymd.uix.dropdownitem, 562  
kivymd.uix.dropdownitem.dropdownitem, 427  
kivymd.uix.expansionpanel, 562  
kivymd.uix.expansionpanel.expansionpanel, 284  
kivymd.uix.filemanager, 562  
kivymd.uix.filemanager.filemanager, 417  
kivymd.uix.fitimage, 563  
kivymd.uix.fitimage.fitimage, 346  
kivymd.uix.floatlayout, 79  
kivymd.uix.gridlayout, 76  
kivymd.uix.hero, 65  
kivymd.uix.imagelist, 563  
kivymd.uix.imagelist.imagelist, 80  
kivymd.uix.label, 563  
kivymd.uix.label.label, 288  
kivymd.uix.list, 563  
kivymd.uix.list.list, 444  
kivymd.uix.menu, 563  
kivymd.uix.menu.menu, 295  
kivymd.uix.navigationdrawer, 563  
kivymd.uix.navigationdrawer.navigationdrawer, 349  
kivymd.uix.navigationrail, 563  
kivymd.uix.navigationrail.navigationrail, 180  
kivymd.uix.pickers, 564  
kivymd.uix.pickers.colorpicker, 564  
kivymd.uix.pickers.colorpicker.colorpicker, 273  
kivymd.uix.pickers.datepicker, 564  
kivymd.uix.pickers.datepicker.datepicker, 248  
kivymd.uix.pickers.timepicker, 564  
kivymd.uix.pickers.timepicker.timepicker, 277  
kivymd.uix.progressbar, 564  
kivymd.uix.progressbar.progressbar, 213  
kivymd.uix.recyclegridlayout, 38  
kivymd.uix.recycleview, 62  
kivymd.uix.refreshlayout, 564  
kivymd.uix.refreshlayout.refreshlayout, 88  
kivymd.uix.relativelayout, 64  
kivymd.uix.responsivewidget, 54  
kivymd.uix.screen, 59  
kivymd.uix.screenmanager, 60  
kivymd.uix.scrollview, 53  
kivymd.uix.segmentedcontrol, 564  
kivymd.uix.segmentedcontrol.segmentedcontrol, 400  
kivymd.uix.selection, 564  
kivymd.uix.selection.selection, 241  
kivymd.uix.selectioncontrol, 565  
kivymd.uix.selectioncontrol.selectioncontrol, 388  
kivymd.uix.slider, 565  
kivymd.uix.slider.slider, 109  
kivymd.uix.sliverappbar, 565  
kivymd.uix.sliverappbar.sliverappbar, 149  
kivymd.uix.snackbar, 565  
kivymd.uix.snackbar.snackbar, 339  
kivymd.uix.spinner, 565  
kivymd.uix.spinner.spinner, 314  
kivymd.uix.stacklayout, 63  
kivymd.uix.swiper, 565  
kivymd.uix.swiper.swiper, 438  
kivymd.uix.tab, 565  
kivymd.uix.tab.tab, 317  
kivymd.uix.taptargetview, 40  
kivymd.uix.templates, 566  
kivymd.uix.templates.rotatewidget, 566  
kivymd.uix.templates.rotatewidget.rotatewidget, 523  
kivymd.uix.templates.scalewidget, 566  
kivymd.uix.templates.scalewidget.scalewidget, 524  
kivymd.uix.templates.stencilwidget, 566  
kivymd.uix.templates.stencilwidget.stencilwidget, 524  
kivymd.uix.textfield, 566  
kivymd.uix.textfield.textfield, 371  
kivymd.uix.toolbar, 566  
kivymd.uix.toolbar.toolbar, 164  
kivymd.uix.tooltip, 566  
kivymd.uix.tooltip.tooltip, 218  
kivymd.uix.transition, 567  
kivymd.uix.transition.transition, 428  
kivymd.uix.widget, 37  
kivymd.utils, 567  
kivymd.utils.asynckivy, 567  
kivymd.utils.fpsmonitor, 567  
kivymd.utils.set\_bars\_colors, 568

# INDEX

## A

accent\_color (*kivymd.theming.ThemeManager attribute*), 15  
accent\_color (*kivymd.uix.pickers.datepicker.datepicker.BaseDialogPicker attribute*), 257  
accent\_dark (*kivymd.theming.ThemeManager attribute*), 16  
accent\_dark\_hue (*kivymd.theming.ThemeManager attribute*), 15  
accent\_hue (*kivymd.theming.ThemeManager attribute*), 15  
accent\_light (*kivymd.theming.ThemeManager attribute*), 16  
accent\_light\_hue (*kivymd.theming.ThemeManager attribute*), 15  
accent\_palette (*kivymd.theming.ThemeManager attribute*), 15  
ActionTopAppBarButton (class in *kivymd.uix.toolbar.toolbar*), 171  
active (*kivymd.uix.chip.chip.MDChip attribute*), 471  
active (*kivymd.uix.navigationrail.navigationrail.MDNavigationRailItem attribute*), 198  
active (*kivymd.uix.selectioncontrol.selectioncontrol.MDCheckbox attribute*), 392  
active (*kivymd.uix.selectioncontrol.selectioncontrol.MDSwitch attribute*), 394  
active (*kivymd.uix.slider.slider.MDSlider attribute*), 110  
active (*kivymd.uix.spinner.spinner.MDSpinner attribute*), 317  
active\_line (*kivymd.uix.textfield.textfield.MDTextField attribute*), 382  
adaptive\_height (*kivymd.uix.MDAdaptiveWidget attribute*), 560  
adaptive\_size (*kivymd.uix.MDAdaptiveWidget attribute*), 560  
adaptive\_width (*kivymd.uix.MDAdaptiveWidget attribute*), 560  
add\_action\_button\_to\_overflow() (*kivymd.uix.toolbar.toolbar.MDTopAppBar method*), 178  
add\_actions\_buttons() (*kivymd.uix.banner.bannerMDBanner method*), 225  
add\_doc\_to\_collection() (*kivymd.tools.patterns.MVC.Model.database\_restdb.DataBase method*), 557  
add\_item() (*kivymd.uix.bottomsheet.bottomsheet.MDGridBottomSheet method*), 149  
add\_item() (*kivymd.uix.bottomsheet.bottomsheet.MDListBottomSheet method*), 148  
add\_overflow\_button() (*kivymd.uix.toolbar.toolbar.MDTopAppBar method*), 178  
add\_row() (*kivymd.uix.datatables.datatables.MDDDataTable method*), 106  
add\_scrim() (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavigati method*), 359  
add\_widget() (*kivymd.uix.backdrop.backdrop.MDBackdrop method*), 163  
add\_widget() (*kivymd.uix.bottomnavigation.bottomnavigation.MDBottom method*), 437  
add\_widget() (*kivymd.uix.bottomsheet.bottomsheet.MDBottomSheet method*), 146  
add\_widget() (*kivymd.uix.card.card.MDCardSwipe method*), 240  
add\_widget() (*kivymd.uix.expansionpanel.expansionpanel.MDExpansion method*), 288  
add\_widget() (*kivymd.uix.imagelist.imagelist.MDSmartTile method*), 87  
add\_widget() (*kivymd.uix.list.list.BaseListItem method*), 462  
add\_widget() (*kivymd.uix.navigationdrawer.navigationdrawer.MDNaviga method*), 366  
add\_widget() (*kivymd.uix.navigationdrawer.navigationdrawer.MDNaviga method*), 359  
add\_widget() (*kivymd.uix.navigationrail.navigationrail.MDNavigatio method*), 213  
add\_widget() (*kivymd.uix.screenmanager.MDScreenManager method*), 60  
add\_widget() (*kivymd.uix.segmentedcontrol.segmentedcontrol.MDSegme method*), 404  
add\_widget() (*kivymd.uix.selection.selection.MDSelectionList method*), 247  
add\_widget() (*kivymd.uix.sliverappbar.sliverappbar.MDSliverAppbar method*), 247

method), 156  
add\_widget() (kivymd.uix.swiper.swiper.MDSwiper method), 442  
add\_widget() (kivymd.uix.tab.tab.MDTabs method), 338  
add\_widget() (kivymd.uix.toolbar.toolbar.MDBottomAppBar method), 179  
adjacent\_color\_constants (kivymd.uix.pickers.colorpicker.colorpicker.MDColorPicker.attribute), 275  
adjust\_position() (kivymd.uix.menu.menu.MDDropdownMenu method), 314  
adjust\_size() (kivymd.uix.label.label.MDIcon method), 294  
adjust\_tooltip\_position() (kivymd.uix.tooltip.tooltip.MDTooltip method), 220  
ajust\_radius() (kivymd.uix.menu.menu.MDDropdownMenu method), 313  
allow\_stretch (kivymd.uix.tab.tab.MDTabs attribute), 336  
am\_pm (kivymd.uix.pickers.timepicker.timepicker.MDTimePicker attribute), 283  
am\_pm\_border\_width (kivymd.uix.pickers.timepicker.timepicker.MDTimePicker tooltip.method), 283  
am\_pm\_radius (kivymd.uix.pickers.timepicker.timepicker.MDTimePicker attribute), 282  
anchor (kivymd.effects.roulettescroll.roulettescroll.RouletteScrollEffect attribute), 522  
anchor (kivymd.uix.button.button.MDFloatingActionButtonSpeedDia (kivymd.uix.pickers.timepicker.timepicker.MDTimePicker attribute), 133  
anchor (kivymd.uix.card.card.MDCardSwipe attribute), 239  
anchor (kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationDrawer property), 367  
anchor (kivymd.uix.navigationrail.navigationrail.MDNavigationRail attribute), 199  
anchor\_title (kivymd.uix.backdrop.backdrop.MDBackdrop attribute), 160  
anchor\_title (kivymd.uix.toolbar.toolbar.MDTopAppBar AUTORELOADER\_IGNORE\_PATTERNS attribute), 177  
angle (kivymd.uix.behaviors.backgroundcolor\_behavior.BackgroundColorBehavior attribute), 491  
anim\_complete() (kivymd.uix.behaviors.ripple\_behavior.CommonRipple.attribute), 546  
anim\_duration (kivymd.uix.tab.tab.MDTabs attribute), 336  
anim\_rect() (kivymd.uix.textfield.textfield.MDTextFieldRect method), 377  
anim\_threshold (kivymd.uix.tab.tab.MDTabs attribute), 336  
animate\_header() (kivymd.uix.bottomnavigation.bottomnavigation.MDBottomNavigationItem method), 434  
animate\_opacity\_icon()  
(kivymd.uix.backdrop.backdrop.MDBackdrop method), 163  
animated\_hero\_in() (kivymd.uix.transition.transition.MDTransitionBase method), 429  
animated\_hero\_out() (kivymd.uix.transition.transition.MDTransitionBase method), 429  
animation (kivymd.uix.bottomsheet.bottomsheet.MDBottomSheet attribute), 146  
animation\_display\_banner()  
animation\_label() (kivymd.uix.button.button.MDTextButton method), 132  
animation\_segment\_switch()  
(kivymd.uix.segmentedcontrol.segmentedcontrol.MDSegmentedControl method), 404  
animation\_size\_ripple\_area() (kivymd.uix.navigationrail.navigationrail.MDNavigationRailItem method), 198  
animation\_tooltip\_dismiss()  
MDTimePicker tooltip.MDTooltip method), 220  
MDTimePicker tooltip\_show() (kivymd.uix.tooltip.tooltip.MDTooltip method), 20  
animation\_transition  
apply\_state() (kivymd.tools.hotreload.app.MDApp method), 547  
AttributeParser (kivymd.tools.hotreload.app.MDApp property), 547  
ArgumentParserWithHelp (class in kivymd.tools.argument\_parser), 543  
auto\_dismiss (kivymd.uix.snackbar.snackbar.BaseSnackbar attribute), 345  
AUTORELOADER\_PATHS (kivymd.tools.hotreload.app.MDApp attribute),  
B  
back() (kivymd.uix.filemanager.filemanager.MDFileManager method), 426  
back\_color (kivymd.uix.progressbar.progressbar.MDProgressBar attribute), 217  
back\_layer\_color (kivymd.uix.backdrop.backdrop.MDBackdrop attribute), 161  
background (kivymd.uix.behaviors.backgroundcolor\_behavior.BackgroundColor attribute), 490

background (kivymd.uix.bottomsheet.bottomsheet.MDBottomSheet attribute), 194  
attribute), 145  
background\_color (kivymd.uix.datatables.datatables.MDDDataTable attribute), 294  
attribute), 103  
background\_color (kivymd.uix.menu.menu.MDDropdownMenu attribute), 195  
attribute), 311  
background\_color (kivymd.uix.silverappbar.silverappbar.MSDialAppbar class in kivymd.uix.dialog.dialog), 406  
attribute), 154  
background\_color (kivymd.uix.tab.tab.MDTabs attribute), 336  
background\_color\_cell (kivymd.uix.datatables.datatables.MDDDataTable attribute), 105  
background\_color\_header (kivymd.uix.datatables.datatables.MDDDataTable attribute), 104  
background\_color\_selected\_cell (kivymd.uix.datatables.datatables.MDDDataTable attribute), 105  
background\_color\_selection\_button (kivymd.uix.filemanager.filemanager.MDFFileManager attribute), 422  
background\_color\_toolbar (kivymd.uix.filemanager.filemanager.MDFFileManager attribute), 423  
background\_down (kivymd.uix.behaviors.toggle\_behavior.MDToggleBehavior attribute), 21  
attribute), 479  
background\_down\_button\_selected\_type\_color (kivymd.uix.pickers.colorpicker.colorpicker.MDColpcker color (kivymd.uix.button.button.MDFloatingActionButtonSpeedDial attribute), 275  
attribute), 19  
background\_hue (kivymd.uix.behaviors.backgroundcolor\_behavior.MDColorBehavior attribute), 21  
attribute), 491  
background\_normal (kivymd.uix.behaviors.toggle\_behavior.MDToggleButton attribute), 479  
bind() (kivymd.utils.asynckivy.event method), 567  
background\_origin (kivymd.uix.behaviors.backgroundcolor\_behavior.MDColorBehavior attribute), 491  
bind(key) (BackgroundBehavior attribute), 547  
background\_palette (kivymd.uix.behaviors.backgroundcolor\_behavior.MDColorBehavior attribute), 491  
bind(key) (BodyBehavior attribute), 518  
bind(key) (EffectBehavior attribute), 518  
bind(key) (HeaderBehavior attribute), 518  
bind(key) (SidebarBehavior attribute), 518  
bind(key) (VerticalBehavior attribute), 518  
BackgroundColorBehavior (class in kivymd.uix.menu.menu.MDDropdownMenu kivymd.uix.behaviors.backgroundcolor\_behavior), 490  
border\_margin (kivymd.uix.menu.menu.MDDropdownMenu attribute), 308  
badge\_bg\_color (kivymd.uix.label.label.MDIcon attribute), 294  
badge\_bg\_color (kivymd.uix.navigationrail.navigationrail.MDNaviattribute), 194  
attribute), 196  
badge\_font\_size (kivymd.uix.label.label.MDIcon attribute), 294  
badge\_font\_size (kivymd.uix.navigationrail.navigationrail.MDNaviattribute), 197  
attribute), 197  
badge\_icon (kivymd.uix.bottonnavigation.bottonnavigation.MDTab method), 547  
attribute), 434  
badge\_icon (kivymd.uix.label.label.MDIcon attribute), 294  
badge\_icon (kivymd.uix.navigationrail.navigationrail.MDNaviattribute), 345  
badge\_icon\_color (kivymd.uix.label.label.MDIcon attribute), 294  
badge\_icon\_color (kivymd.uix.navigationrail.navigationrail.MDNavigatiattribute), 345  
BaseButton (class in kivymd.uix.button.button), 128  
BaseDialog (class in kivymd.uix.dialog.dialog), 406  
BaseDialogPicker (class in kivymd.uix.pickers.datepicker.datepicker), 253  
BaseListItem (class in kivymd.uix.list.list), 460  
BaseSnackbar (class in kivymd.uix.snackbar.snackbar), 344  
bg\_color (kivymd.uix.bottomsheet.bottomsheet.MDBottomSheet attribute), 146  
bg\_color (kivymd.uix.list.list.BaseListItem attribute), 461  
bg\_color (kivymd.uix.snackbar.snackbar.BaseSnackbar attribute), 345  
bg\_color\_root\_button (kivymd.uix.button.button.MDFloatingActionButtonSpeedDial attribute), 136  
bg\_color\_stack\_button (kivymd.uix.button.button.MDFloatingActionButtonSpeedDial attribute), 137  
bg\_darkest (kivymd.theming.ThemeManager attribute), 19  
bg\_normal (kivymd.theming.ThemeManager attribute), 138  
bind() (kivymd.utils.asynckivy.event method), 567  
bind(key) (BackgroundBehavior attribute), 547  
body (kivymd.uix.layout.layout.Behavior attribute), 518  
bind(key) (EffectBehavior attribute), 518  
bind(key) (HeaderBehavior attribute), 518  
bind(key) (SidebarBehavior attribute), 518  
bind(key) (VerticalBehavior attribute), 518  
border\_margin (kivymd.uix.menu.menu.MDDropdownMenu attribute), 308  
box\_color (kivymd.uix.imagelist.imagelist.MDSmartTile attribute), 83  
box\_position (kivymd.uix.imagelist.imagelist.MDSmartTile attribute), 83  
box\_radius (kivymd.uix.imagelist.imagelist.MDSmartTile attribute), 82  
build() (kivymd.tools.hotreload.app.MDApp method), 546  
build\_app() (kivymd.tools.hotreload.app.MDApp attribute), 409  
buttons (kivymd.uix.dialog.dialog.MDDialog attribute), 409  
buttons (kivymd.uix.snackbar.snackbar.BaseSnackbar attribute), 345

# C

call\_ripple\_animation\_methods()  
    (*kivymd.uix.behaviors.ripple\_behavior.CommonRipple  
        method*), 495

callback() (*kivymd.utils.asynckivy.event method*), 567

caller (*kivymd.uix.menu.menu.MDDropdownMenu  
        attribute*), 311

can\_capitalize (*kivymd.uix.label.label.MDLabel  
        attribute*), 293

cancel\_all\_animations\_on\_double\_click()  
    (*kivymd.uix.textfield.textfield.MDTextField  
        method*), 387

cancelable (*kivymd.uix.taptargetview.MDTapTargetView  
        attribute*), 52

canvas\_bg (*kivymd.uix.label.label.MDLabel  
        attribute*), 293

caption (*kivymd.uix.bottomsheet.bottomsheet.GridBottomSheet  
        attribute*), 148

catching\_duration (*kivymd.uix.progressbar.progressbar.MDProgressBar  
        attribute*), 217

catching\_transition  
    (*kivymd.uix.progressbar.progressbar.MDProgressBar  
        attribute*), 217

catching\_up() (*kivymd.uix.progressbar.progressbar.MDProgressBar  
        method*), 218

change\_month() (*kivymd.uix.pickers.datepicker.MDDatePicker  
        method*), 272

check (*kivymd.uix.datatables.datatables.MDDDataTable  
        attribute*), 100

check\_content() (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavi  
        method*), 364

check\_determinate()  
    (*kivymd.uix.spinner.spinner.MDSpinner  
        method*), 317

check\_font\_styles()  
    (*kivymd.uix.label.label.MDLabel  
        method*), 293

check\_open\_panel() (*kivymd.uix.expansionpanel.expansionpanel.MDExpansio  
        method*), 287

check\_overflow\_cls()  
    (*kivymd.uix.toolbar.toolbar.MDTopAppBar  
        method*), 178

check\_position\_caller()  
    (*kivymd.uix.menu.menu.MDDropdownMenu  
        method*), 313

check\_size() (*kivymd.uix.progressbar.progressbar.MDProgressBar  
        method*), 217

check\_text() (*kivymd.uix.textfield.textfield.MDTextField  
        method*), 388

check\_transition() (*kivymd.uix.screenmanager.MDScreenManager  
        method*), 60

checkbox\_icon\_down (*kivymd.uix.selectioncontrol.selectioncontrol.MDCheckbox  
        attribute*), 392

checkbox\_icon\_normal  
    (*kivymd.uix.selectioncontrol.selectioncontrol.MDCheckbox  
        attribute*), 392

checkbox\_leftWidget (*class in kivymd.uix.list.list*), 464

circular\_padding (*kivymd.uix.circularlayout.MDCircularLayout  
        attribute*), 58

circular\_radius (*kivymd.uix.circularlayout.MDCircularLayout  
        attribute*), 58

CircularElevationBehavior (*class  
        in kivymd.uix.behaviors.elevation*), 513

CircularRippleBehavior (*class  
        in kivymd.uix.behaviors.ripple\_behavior*), 495

CLASSES (*kivymd.tools.hotreload.app.MDApp  
        attribute*), 546

clockwise (*kivymd.uix.circularlayout.MDCircularLayout  
        attribute*), 58

close() (*kivymd.uix.backdrop.backdrop.MDBackdrop  
        method*), 163

close() (*kivymd.uix.filemanager.filemanager.MDFFileManager  
        method*), 426

close\_card() (*kivymd.uix.card.card.MDCardSwipe  
        method*), 241

close\_icon (*kivymd.uix.backdrop.backdrop.MDBackdrop  
        attribute*), 162

close\_on\_click (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavi  
        attribute*), 369

close\_panel() (*kivymd.uix.expansionpanel.expansionpanel.MDExpansio  
        method*), 287

close\_stack() (*kivymd.uix.button.button.MDFloatingActionButtonSpeed  
        method*), 139

closing\_interval (*kivymd.uix.card.card.MDCardSwipe  
        attribute*), 239

closing\_time (*kivymd.uix.backdrop.backdrop.MDBackdrop  
        attribute*), 162

closing\_time (*kivymd.uix.banner.banner.MDBanner  
        attribute*), 225

closing\_time (*kivymd.uix.button.button.MDFloatingActionButtonSpeedD  
        attribute*), 136

closing\_time (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavig  
        attribute*), 370

closing\_time\_button\_rotation  
    (*kivymd.uix.button.button.MDFloatingActionButtonSpeedDial  
        attribute*), 136

closing\_transition (*kivymd.uix.backdrop.backdrop.MDBackdrop  
        attribute*), 162

closing\_transition (*kivymd.uix.button.button.MDFloatingActionButton  
        attribute*), 136

closing\_transition (*kivymd.uix.card.card.MDCardSwipe  
        attribute*), 287

closing\_transition (*kivymd.uix.expansionpanel.expansionpanel.MDExp  
        attribute*), 287

closing\_transition (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavig  
        attribute*), 370

**closing\_transition\_button\_rotation** (method), 417  
*(kivymd.uix.button.button.MDFloatingActionButtonSpeedDial)*  
**coasting\_alpha** (attribute), 136  
**coasting\_alpha** (attribute), 522  
**color** (in module *kivymd.theming\_dynamic\_text*), 538  
**color** (kivymd.uix.button.button.MDTextButton attribute), 132  
**color** (kivymd.uix.card.card.MDSeparator attribute), 238  
**color** (kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationDrawer attribute), 361  
**color** (kivymd.uix.progressbar.progressbar.MDProgressBar attribute), 217  
**color** (kivymd.uix.slider.slider.MDSlider attribute), 110  
**color** (kivymd.uix.spinner.spinner.MDSpinner attribute), 317  
**color\_active** (kivymd.uix.selectioncontrol.selectioncontrol.MDSelect attribute), 393  
**color\_disabled** (kivymd.uix.button.button.MDTextButton attribute), 132  
**color\_icon\_root\_button** (kivymd.uix.button.button.MDFloatingActionButtonSpeedDial attribute), 137  
**color\_icon\_stack\_button** (kivymd.uix.button.button.MDFloatingActionButtonSpeedDial attribute), 137  
**color\_inactive** (kivymd.uix.selectioncontrol.selectioncontrol.MDCheck attribute), 393  
**colors** (in module *kivymd.color\_definitions*), 30  
**column\_data** (kivymd.uix.datatables.datatables.MDDDataTable attribute), 94  
**command()** (in module *kivymd.tools.release.git\_commands*), 558  
**CommonElevationBehavior** (class in *kivymd.uix.behaviors.elevation*), 505  
**CommonRipple** (class in *kivymd.uix.behaviors.ripple\_behavior*), 493  
**compare\_date\_range()** (kivymd.uix.pickers.datepicker.datepicker.MDDatePicker method), 272  
**complete\_swipe()** (kivymd.uix.card.card.MDCardSwipe method), 241  
**content** (kivymd.uix.expansionpanel.expansionpanel.MDEExpansionPanel attribute), 287  
**content\_cls** (kivymd.uix.dialog.dialog.MDDialog attribute), 414  
**create\_argument\_parser()** (in module *kivymd.tools.release.make\_release*), 559  
**create\_buttons()** (kivymd.uix.dialog.dialog.MDDialog method), 417  
**create\_clock()** (kivymd.uix.behaviors.touch\_behavior.TouchBehavior method), 474  
**create\_items()** (kivymd.uix.dialog.dialog.MDDialog

**D**

**current** (kivymd.uix.bottomnavigation.bottomnavigation.TabbedPanelBase attribute), 435  
**current\_active\_segment** (kivymd.uix.segmentedcontrol.segmentedcontrol.MDSegmentedControl attribute), 401  
**current\_hero** (kivymd.uix.screenmanager.MDScreenManager attribute), 60  
**current\_heroes** (kivymd.uix.screenmanager.MDScreenManager attribute), 60  
**current\_item** (kivymd.uix.dropdownitem.dropdownitem.MDDropDownItem attribute), 428  
**current\_selected\_item** (kivymd.uix.navigationrail.navigationrail.MDNavigationRail attribute), 210  
 **DataBase** (class in *kivymd.tools.patterns.MVC.Model.database\_firebase*), 557  
 **DataBase** (class in *kivymd.tools.patterns.MVC.Model.database\_restdb*), 549  
**datas** (in module *kivymd.tools.packaging.pyinstaller.hook-kivymd*), 549  
**date\_range\_text\_error** (kivymd.uix.pickers.datepicker.datepicker.MDDatePicker attribute), 271  
**DatePickerInputField** (class in *kivymd.uix.pickers.datepicker.datepicker*), 268  
**day** (kivymd.uix.pickers.datepicker.datepicker.MDDatePicker attribute), 270  
**DEBUG** (kivymd.tools.hotreload.app.MDApp attribute), 546  
**dec\_disabled()** (kivymd.theming.ThemableBehavior method), 27  
**DeclarativeBehavior** (class in *kivymd.uix.behaviors.declarative\_behavior*), 489  
**default\_color** (kivymd.uix.pickers.colorpicker.colorpicker.MDColorPicker attribute), 275  
**degree\_spacing** (kivymd.uix.circularlayout.MDCircularLayout attribute), 58  
**delete\_clock()** (kivymd.uix.behaviors.touch\_behavior.TouchBehavior method), 474

delete\_clock() (*kivymd.uix.tooltip.tooltip.MDTooltip* method), 220  
delete\_doc\_from\_collection() (*kivymd.tools.patterns.MVC.Model.database\_restdb*.*database\_restdb*.*DataBase* method), 557  
description\_text (*kivymd.uix.taptargetview.MDTapTargetView* attribute), 51  
description\_text\_bold (*kivymd.uix.taptargetview.MDTapTargetView* attribute), 51  
description\_text\_color (*kivymd.uix.taptargetview.MDTapTargetView* attribute), 51  
description\_text\_size (*kivymd.uix.taptargetview.MDTapTargetView* attribute), 51  
deselect\_item() (*kivymd.uix.navigationrail.navigationrail*.*navigationrail*.*NavigationRail* method), 212  
desktop\_view (*kivymd.uix.responsivelayout.MDResponsiveLayout* attribute), 56  
detect\_visible (*kivymd.uix.behaviors.hover\_behavior.HoverBehavior* attribute), 481  
determinate (*kivymd.uix.spinner.spinner.MDSpinner* attribute), 316  
determinate\_time (*kivymd.uix.spinner.spinner.MDSpinner* attribute), 317  
DEVICE\_IOS (*in module kivymd.material\_resources*), 538  
device\_ios (*kivymd.theming.ThemableBehavior* attribute), 26  
device\_orientation (*kivymd.theming.ThemeManager* attribute), 23  
DEVICE\_TYPE (*in module kivymd.material\_resources*), 538  
disabled\_color (*kivymd.uix.button.button.BaseButton* attribute), 130  
disabled\_color (*kivymd.uix.selectioncontrol.selectioncontrol*.*selectioncontrol*.*SelectionControl* attribute), 393  
disabled\_hint\_text\_color (*kivymd.theming.ThemeManager* attribute), 22  
disabled\_primary\_color (*kivymd.theming.ThemeManager* attribute), 22  
dismiss() (*kivymd.uix.bottomsheet.bottomsheet.MDBottomSheet* method), 147  
dismiss() (*kivymd.uix.menu.menu.MDDropdownMenu* method), 314  
dismiss() (*kivymd.uix.snackbar.snackbar.BaseSnackbar* method), 345  
displacement (*kivymd.effects.stiffscroll.stiffscroll.StiffScrollView* attribute), 519  
display\_tooltip() (*kivymd.uix.tooltip.tooltip.MDTooltip* method), 220  
divider (*kivymd.uix.list.list.BaseListItem* attribute), 461  
divider\_color (*kivymd.theming.ThemeManager* attribute), 21  
divider\_color (*kivymd.uix.list.list.BaseListItem* attribute), 461  
do\_animation\_check() (*kivymd.uix.chip.chip.MDChip* method), 471  
do\_animation\_open\_stack()  
do\_layout() (*kivymd.uix.circularlayout.MDCircularLayout* method), 58  
download\_file() (*in module kivymd.tools.release.update\_icons*), 560  
dp (*in module kivymd.material\_resources*), 538  
drag\_threshold (*kivymd.effects.roulettescroll.roulettescroll.RouletteScrollView* attribute), 522  
drag\_threshold (*kivymd.effects.stiffscroll.stiffscroll.StiffScrollView* attribute), 518  
duration (*kivymd.toast.kivytoast.kivytoast.Toast* attribute), 542  
duration\_behavior (*kivymd.uix.snackbar.snackbar.BaseSnackbar* attribute), 345  
duration\_closing (*kivymd.uix.bottomsheet.bottomsheet.MDBottomSheet* attribute), 145  
duration\_long\_touch (*kivymd.uix.behaviors.touch\_behavior.TouchBehavior* attribute), 474  
duration\_opening (*kivymd.uix.bottomsheet.bottomsheet.MDBottomSheet* attribute), 145

## E

edge\_bottom (*kivymd.effects.fadingedge.fadingedge.FadingEdgeEffect* attribute), 520  
edge\_top (*kivymd.effects.fadingedge.fadingedge.FadingEdgeEffect* attribute), 520  
edit\_data (*kivymd.tools.patterns.MVC.Model.database\_restdb*.*DataBase* method), 557  
edit\_padding\_for\_item() (*kivymd.uix.dialog.dialog.MDDialog* method), 417  
effect\_cls (*kivymd.uix.datatables.datatables.MDDatatable* attribute), 106  
elevation (*kivymd.uix.behaviors.elevation.CommonElevationBehavior* attribute), 505  
elevation (*kivymd.uix.datatables.datatables.MDDatatable* attribute), 101  
elevation (*kivymd.uix.dialog.dialog.BaseDialog* attribute), 407  
elevation (*kivymd.uix.menu.menu.MDDropdownMenu* attribute), 313  
elevation (*kivymd.uix.tab.tab.MDTabs* attribute), 337  
enable\_autoreload() (*kivymd.tools.hotreload.app.MDApp* method), 547

enable\_swiping (*kivymd.uix.navigationdrawer.navigation\_drawer*.*NavigationDrawer*.*navigation\_drawer*.*attribute*), 370  
 enter\_point (*kivymd.uix.behaviors.hover\_behavior*.*HoverBehavior*.*enter\_point*.*attribute*), 481  
 error (*kivymd.uix.textfield.textfield*.*MDTextField*.*error*.*attribute*), 382  
 error() (*kivymd.tools.argument\_parser*.*ArgumentParserWithHelp*.*error*.*method*), 544  
 error\_color (*kivymd.theming*.*ThemeManager*.*error\_color*.*attribute*), 23  
 error\_color (*kivymd.uix.textfield.textfield*.*MDTextField*.*error\_color*.*attribute*), 382  
 event (class in *kivymd.utils.asynckivy*), 567  
*ExceptionClass* (class in *kivymd.tools.hotreload.app*), 545  
 exit\_manager (*kivymd.uix.filemanager*.*filemanager*.*MDFileManager*.*exit\_manager*.*attribute*), 425  
 export\_icon\_definitions() (in module *kivymd.tools.release.update\_icons*), 560  
 ext (*kivymd.uix.filemanager*.*filemanager*.*MDFileManager*.*ext*.*attribute*), 425

**F**

fade\_color (*kivymd.effects.fadingedge*.*fadingedge*.*FadingEdgeEffect*.*fade\_color*.*attribute*), 520  
 fade\_height (*kivymd.effects.fadingedge*.*fadingedge*.*FadingEdgeEffect*.*fade\_height*.*attribute*), 520  
 fade\_in() (*kivymd.toast.kivytoast*.*kivytoast*.*Toast*.*method*), 542  
 fade\_out() (*kivymd.toast.kivytoast*.*kivytoast*.*Toast*.*method*), 542  
 fade\_out() (*kivymd.uix.behaviors.ripple\_behavior*.*CommonRipple*.*method*), 495  
*FadingEdgeEffect* (class in *kivymd.effects.fadingedge*.*fadingedge*), 520  
*FakeCircularElevationBehavior* (class in *kivymd.uix.behaviors.elevation*), 514  
*FakeRectangularElevationBehavior* (class in *kivymd.uix.behaviors.elevation*), 514  
 fbind() (*kivymd.tools.patterns*.*MVC.lib*s.*translation*.*Translation*.*fbind*.*method*), 557  
 fill\_color\_focus (*kivymd.uix.textfield*.*textfield*.*MDTextField*.*fill\_color\_focus*.*attribute*), 382  
 fill\_color\_normal (*kivymd.uix.textfield*.*textfield*.*MDTextField*.*fill\_color\_normal*.*attribute*), 382  
 finish\_ripple() (*kivymd.uix.behaviors.ripple\_behavior*.*CommonRipple*.*method*), 495  
 first\_widget (*kivymd.uix.bottomnavigation*.*bottomnavigation*.*MDBottomNavigation*.*first\_widget*.*attribute*), 436  
*FitImage* (class in *kivymd.uix.fitimage*.*fitimage*), 349  
 fixed\_tab\_label\_width (*kivymd.uix.tab*.*tab*.*MDTabs*.*fixed\_tab\_label\_width*.*attribute*), 336  
 focus\_behavior (*kivymd.uix.behaviors*.*focus\_behavior*.*FocusBehavior*.*focus\_behavior*.*attribute*), 517

*foreground\_color* (*kivymd.uix.behaviors.focus\_behavior*.*FocusBehavior*.*foreground\_color*.*attribute*), 517  
*font\_color\_down* (*kivymd.uix.behaviors.toggle\_behavior*.*MDToggleBehavior*.*font\_color\_down*.*attribute*), 479  
*font\_color\_normal* (*kivymd.uix.behaviors.toggle\_behavior*.*MDToggleBehavior*.*font\_color\_normal*.*attribute*), 479  
*font\_name* (*kivymd.uix.bottomanavigation*.*bottomanavigation*.*MDBottomNavigation*.*font\_name*.*attribute*), 436  
*font\_name* (*kivymd.uix.button*.*button*.*BaseButton*.*font\_name*.*attribute*), 129  
*font\_name* (*kivymd.uix.navigationrail*.*navigationrail*.*MNavigationRail*.*font\_name*.*attribute*), 211  
*font\_name* (*kivymd.uix.pickers*.*datepicker*.*datepicker*.*BaseDialogPicker*.*font\_name*.*attribute*), 267  
*font\_name* (*kivymd.uix.tab*.*tab*.*MDTabs*.*font\_name*.*attribute*), 337  
*font\_name\_helper\_text* (*kivymd.uix.textfield*.*textfield*.*MDTextField*.*font\_name\_helper\_text*.*attribute*), 386  
*font\_name\_hint\_text* (*kivymd.uix.textfield*.*textfield*.*MDTextField*.*font\_name\_hint\_text*.*attribute*), 387  
*font\_name\_max\_length* (*kivymd.uix.textfield*.*textfield*.*MDTextField*.*font\_name\_max\_length*.*attribute*), 387  
*font\_path* (in module *kivymd.tools.release.update\_icons*), 559  
*font\_size* (*kivymd.uix.button*.*button*.*BaseButton*.*font\_size*.*attribute*), 129  
*font\_size* (*kivymd.uix.dropdownitem*.*dropdownitem*.*MDDropDownItem*.*font\_size*.*attribute*), 428  
*font\_size* (*kivymd.uix.snackbar*.*snackbar*.*Snackbar*.*font\_size*.*attribute*), 346  
*font\_size* (*kivymd.uix.textfield*.*textfield*.*MDTextField*.*font\_size*.*attribute*), 386  
*font\_style* (*kivymd.uix.button*.*button*.*BaseButton*.*font\_style*.*attribute*), 129  
*font\_style* (*kivymd.uix.label*.*label*.*MDLabel*.*font\_style*.*attribute*), 293  
*font\_style* (*kivymd.uix.list*.*list*.*BaseListItem*.*font\_style*.*attribute*), 460  
*font\_styles* (*kivymd.theming*.*ThemeManager*.*font\_styles*.*attribute*), 23  
*font\_version* (in module *kivymd.tools.release.update\_icons*), 559  
*fonts* (in module *kivymd.font\_definitions*), 35  
*fonts\_path* (in module *kivymd*), 537  
*force\_title\_icon\_mode* (*kivymd.uix.tab*.*tab*.*MDTabs*.*force\_title\_icon\_mode*.*attribute*), 337  
*foreground\_lock* (*kivymd.tools.hotreload.app*.*MDApp*.*foreground\_lock*.*attribute*), 546

format\_help() (*kivymd.tools.argument\_parser.ArgumentParser*)  
    (*get\_text\_with\_help\_on\_side()*  
        (*method*), 544)

FpsMonitor (class in *kivymd.utils.fpsmonitor*), 568

front\_layer\_color (*kivymd.uix.backdrop.backdrop.MDBackdrop*)  
    (*get\_field()* (*kivymd.uix.pickers.datepicker.datepicker.MDDatePicker*)  
        (*attribute*), 161)

funbind() (*kivymd.tools.patterns.MVC.libs.translation.Trigger*)  
    (*get\_hero\_from\_widget()*  
        (*method*), 557)

**G**

generate\_list\_widgets\_days()  
    (*kivymd.uix.pickers.datepicker.datepicker.MDDatePicker*)  
        (*method*), 272)

generate\_list\_widgets\_years()  
    (*kivymd.uix.pickers.datepicker.datepicker.MDDatePicker*)  
        (*method*), 272)

get\_access\_string()  
    (*kivymd.uix.filemanager.filemanager.MDFFileManager*)  
        (*method*), 426)

get\_angle() (*kivymd.uix.circularlayout.MDCircularLayout*)  
    (*method*), 58)

get\_color\_instruction()  
    (*kivymd.uix.textfield.textfield.MDTextFieldRect*)  
        (*method*), 377)

get\_connect()  
    (in *kivymd.tools.patterns.MVC.Model.database\_firebase*,  
        (*556*))

get\_connect()  
    (in *kivymd.tools.patterns.MVC.Model.database\_restdb*,  
        (*557*))

get\_content() (*kivymd.uix.filemanager.filemanager.MDFFileManager*)  
    (*method*), 426)

get\_contrast\_text\_color()  
    (in *kivymd.theming\_dynamic\_text*, 538)

get\_current\_index()  
    (*kivymd.uix.swiper.swiper.MDSwiper*)  
        (*method*), 443)

get\_current\_item() (*kivymd.uix.swiper.swiper.MDSwiper*)  
    (*method*), 443)

get\_current\_tab()  
    (*kivymd.uix.tab.tab.MDTabs*)  
        (*method*), 338)

get\_data\_from\_collection()  
    (*kivymd.tools.patterns.MVC.Model.database\_firebase*)  
        (*method*), 556)

get\_data\_from\_collection()  
    (*kivymd.tools.patterns.MVC.Model.database\_restdb*)  
        (*method*), 557)

get\_date\_range() (*kivymd.uix.pickers.datepicker.datepicker.MDDatePicker*)  
    (*method*), 272)

get\_default\_overflow\_cls()  
    (*kivymd.uix.toolbar.toolbar.MDTopAppBar*)  
        (*method*), 179)

get\_default\_toolbar()  
    (*kivymd.uix.sliverappbar.sliverappbar.MDSliverAppbar*)  
        (*method*), 156)

get\_diffield() (*kivymd.uix.pickers.datepicker.datepicker.MDDatePicker*)  
    (*method*), 272)

get\_items() (*kivymd.uix.screenmanager.MDScreenManager*)  
    (*method*), 60)

get\_hook\_dirs() (in *kivymd.tools.packaging.pyinstaller*), 549

get\_icons\_list() (in *kivymd.tools.release.update\_icons*), 560

get\_items() (*kivymd.uix.navigationrail.navigationrail.MDNavigationRail*)  
    (*method*), 212)

get\_items() (*kivymd.uix.swiper.swiper.MDSwiper*)  
    (*method*), 443)

get\_list\_date() (*kivymd.uix.pickers.datepicker.DatePickerInput*)  
    (*method*), 268)

get\_normal\_height() (*kivymd.uix.dialog.dialog.MDDialog*)  
    (*method*), 417)

get\_previous\_version() (in *kivymd.tools.release.git\_commands*), 558

get\_pyinstaller\_tests() (in *kivymd.tools.packaging.pyinstaller*), 549

get\_real\_device\_type() (*kivymd.uix.controllers.windowcontroller.WindowController*)  
    (*method*), 472)

get\_rect\_instruction() (*kivymd.uix.textfield.textfield.MDTextFieldRect*)  
    (*method*), 377)

get\_rgb() (*kivymd.uix.pickers.colorpicker.colorpicker.MDCColorPicker*)  
    (*method*), 276)

get\_root() (*kivymd.tools.hotreload.app.MDApp*)  
    (*method*), 546)

get\_root\_path() (*kivymd.tools.hotreload.app.MDApp*)  
    (*method*), 547)

get\_row\_checks() (*kivymd.uix.datatables.datatables.MDDDataTable*)  
    (*method*), 109)

get\_selected() (*kivymd.uix.selection.selection.MDSelectionList*)  
    (*method*), 247)

get\_selected\_list\_items() (*kivymd.uix.selection.selection.MDSelectionList*)  
    (*method*), 247)

get\_shader\_string() (*kivymd.uix.behaviors.elevation.CommonElevationBehavior*)  
    (*method*), 513)

get\_slides() (*kivymd.uix.tab.tab.MDTabs*)  
    (*method*), 338)

get\_state() (*kivymd.uix.expansionpanel.expansionpanel.MDExpansionPanel*)  
    (*method*), 287)

get\_state() (*kivymd.uix.pickers.timepicker.timepicker.MDTimePicker*)  
    (*method*), 283)

get\_tab\_list() (*kivymd.uix.tab.tab.MDTabs*)  
    (*method*),

338  
**get\_term\_vel()** (*kivymd.effects.roulettescroll.roulettescroll.RouletteEffect method*), 522  
**get\_window\_width\_resizing\_direction()** (*kivymd.uix.controllers.windowcontroller.WindowController method*), 472  
**git\_clean()** (*in module kivymd.tools.release.git\_commands*), 558  
**git\_commit()** (*in module kivymd.tools.release.git\_commands*), 558  
**git\_push()** (*in module kivymd.tools.release.git\_commands*), 558  
**git\_tag()** (*in module kivymd.tools.release.git\_commands*), 558  
**glsl\_path** (*in module kivymd*), 537  
**GridBottomSheetItem** (*class in kivymd.uix.bottomsheet.bottomsheet*), 148  
**grow()** (*kivymd.uix.behaviors.magic\_behavior.MagicBehavior method*), 497

**H**

**halign** (*kivymd.uix.button.button.BaseButton attribute*), 128  
**handle\_exception()** (*kivymd.tools.hotreload.app.ExceptionHandler class method*), 545  
**header** (*kivymd.uix.backdrop.backdrop.MDBackdrop attribute*), 161  
**header** (*kivymd.uix.bottomnavigation.bottomnavigation.MDBottomNavigation attribute*), 434  
**header\_cls** (*kivymd.uix.menu.menu.MDDropdownMenu attribute*), 304  
**header\_text** (*kivymd.uix.backdrop.backdrop.MDBackdrop attribute*), 162  
**headline\_text** (*kivymd.uix.toolbar.toolbar.MDTopAppBar attribute*), 177  
**headline\_text\_color** (*kivymd.uix.toolbar.toolbar.MDTopAppBar attribute*), 177  
**helper\_text** (*kivymd.uix.pickers.datepicker.DatePicker attribute*), 269  
**helper\_text** (*kivymd.uix.textfield.textfield.MDTextField attribute*), 377  
**helper\_text\_color\_focus** (*kivymd.uix.textfield.textfield.MDTextField attribute*), 383  
**helper\_text\_color\_normal** (*kivymd.uix.textfield.textfield.MDTextField attribute*), 383  
**helper\_text\_mode** (*kivymd.uix.pickers.datepicker.DatePicker attribute*), 268  
**helper\_text\_mode** (*kivymd.uix.textfield.textfield.MDTextField attribute*), 377  
**hero\_to** (*kivymd.uix.screen.MDScreen attribute*), 59  
**heroes\_to** (*kivymd.uix.screen.MDScreen attribute*), 59

**hide()** (*kivymd.uix.banner.banner.MDBanner method*), 255  
**hide\_elevation()** (*kivymd.uix.behaviors.elevation.CommonElevationBehavior method*), 513  
**hide\_toolbar** (*kivymd.uix.silverappbar.silverappbar.MDSilverAppbar attribute*), 155  
**hint** (*kivymd.uix.slider.slider.MDSlider attribute*), 110  
**hint\_animation** (*kivymd.uix.button.button.MDFloatingActionButtonSpeedDial attribute*), 138  
**hint\_bg\_color** (*kivymd.uix.slider.slider.MDSlider attribute*), 111  
**hint\_radius** (*kivymd.uix.slider.slider.MDSlider attribute*), 111  
**hint\_text\_color** (*kivymd.uix.slider.slider.MDSlider attribute*), 111  
**hint\_text\_color\_focus** (*kivymd.uix.textfield.textfield.MDTextField attribute*), 383  
**hint\_text\_color\_normal** (*kivymd.uix.textfield.textfield.MDTextField attribute*), 382  
**hooks\_path** (*in module kivymd.tools.packaging.pyinstaller*), 549  
**horizontal\_growth** (*kivymd.uix.menu.menu.MDDropdownMenu attribute*), 310  
**horizontal\_margins** (*kivymd.theming.ThemeManager attribute*), 23  
**hour** (*kivymd.uix.pickers.timepicker.timepicker.MDTimePicker attribute*), 281  
**hour\_radius** (*kivymd.uix.pickers.timepicker.timepicker.MDTimePicker attribute*), 281  
**hover\_visible** (*kivymd.uix.behaviors.hover\_behavior.HoverBehavior attribute*), 481  
**HoverBehavior** (*class in kivymd.uix.behaviors.hover\_behavior*), 481  
**hovering** (*kivymd.uix.behaviors.hover\_behavior.HoverBehavior attribute*), 481  
**hue** (*in module kivymd.color\_definitions*), 32  
**icon** (*kivymd.app.MDApp attribute*), 29  
**icon** (*kivymd.uix.banner.banner.MDBanner attribute*), 224  
**icon** (*kivymd.uix.bottomnavigation.bottomnavigation.MDTab attribute*), 434  
**icon** (*kivymd.uix.button.button.BaseButton attribute*), 129  
**icon** (*kivymd.uix.button.button.MDFloatingActionButtonSpeedDial attribute*), 131  
**icon** (*kivymd.uix.button.button.MDIconButton attribute*), 129  
**icon** (*kivymd.uix.expansionpanel.expansionpanel.MDExpansionPanel attribute*), 287

icon (*kivymd.uix.filemanager.filemanager.MDFileManager attribute*), 385  
attribute), 421  
icon (*kivymd.uix.label.label.MDIcon attribute*), 294  
icon (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavigateDrawerItem attribute*), 365  
attribute), 365  
icon (*kivymd.uix.navigationrail.navigationrail.MDNavigationRailFabAttribute*), 384  
attribute), 190  
icon\_left\_color (*kivymd.uix.textfield.textfield.MDTextField attribute*), 471  
icon\_left\_color\_focus  
(*kivymd.uix.textfield.textfield.MDTextField attribute*), 384  
icon\_left\_color\_normal  
icon (*kivymd.uix.navigationrail.navigationrail.MDNavigationRailItem attribute*), 192  
attribute), 192  
icon (*kivymd.uix.navigationrail.navigationrail.MDNavigationRailSelectedItem attribute*), 191  
attribute), 191  
icon (*kivymd.uix.selection.selection.MDSelectionList attribute*), 246  
attribute), 246  
icon (*kivymd.uix.tab.tab.MDTabsBase attribute*), 334  
icon (*kivymd.uix.toolbar.toolbar.MDTopAppBar attribute*), 177  
attribute), 177  
icon\_active (*kivymd.uix.selectioncontrol.selectioncontrol.MDSwitch attribute*), 471  
attribute), 394  
icon\_right\_color\_focus  
icon\_active\_color (*kivymd.uix.selectioncontrol.selectioncontrol.MDSwitch attribute*), 395  
attribute), 395  
icon\_bg\_color (*kivymd.uix.selection.selection.MDSelectionList attribute*), 246  
attribute), 246  
icon\_check\_color (*kivymd.uix.chip.chip.MDChip attribute*), 471  
attribute), 471  
icon\_check\_color (*kivymd.uix.selection.selection.MDSelectionList attribute*), 246  
attribute), 246  
icon\_color (*kivymd.theming.ThemeManager attribute*), 22  
attribute), 129  
icon\_color (*kivymd.uix.button.button.BaseButton attribute*), 129  
attribute), 129  
icon\_color (*kivymd.uix.filemanager.filemanager.MDFileManager attribute*), 424  
attribute), 424  
icon\_color (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavigateDrawerItem attribute*), 365  
attribute), 365  
icon\_color (*kivymd.uix.toolbar.toolbar.MDTopAppBar attribute*), 177  
attribute), 177  
icon\_color\_item\_active  
(*kivymd.uix.navigationrail.navigationrail.MDNavigationRailItem attribute*), 489  
attribute), 207  
icon\_color\_item\_normal  
(*kivymd.uix.navigationrail.navigationrail.MDNavigationRailItem attribute*), 206  
attribute), 206  
icon\_definitions\_path  
(*in module kivymd.tools.release.update\_icons*), 559  
attribute), 559  
icon\_folder (*kivymd.uix.filemanager.filemanager.MDFileManager attribute*), 424  
attribute), 424  
icon\_inactive (*kivymd.uix.selectioncontrol.selectioncontrol.MDSwitch attribute*), 395  
attribute), 395  
icon\_inactive\_color  
(*kivymd.uix.selectioncontrol.selectioncontrol.MDSwitch attribute*), 396  
attribute), 396  
icon\_left (*kivymd.uix.chip.chip.MDChip attribute*), 471  
attribute), 471  
icon\_left (*kivymd.uix.textfield.textfield.MDTextField attribute*), 385  
attribute), 385  
icon\_left\_color  
(*kivymd.uix.chip.chip.MDChip attribute*), 471  
attribute), 471  
icon\_left\_color\_focus  
(*kivymd.uix.textfield.textfield.MDTextField attribute*), 384  
attribute), 246  
icon\_right (*kivymd.uix.chip.chip.MDChip attribute*), 471  
attribute), 385  
icon\_right\_color (*kivymd.uix.chip.chip.MDChip attribute*), 471  
attribute), 384  
icon\_right\_color\_normal  
icon\_size (*kivymd.uix.bottomsheet.bottomsheet.GridBottomSheetItem attribute*), 148  
attribute), 129  
icon\_size (*kivymd.uix.button.button.BaseButton attribute*), 129  
attribute), 129  
IconLeftWidget (*class in kivymd.uix.list.list*), 464  
IconLeftWidgetWithoutTouch  
(*class in kivymd.uix.list.list*), 464  
IconRightWidget  
(*class in kivymd.uix.list.list*), 464  
IconRightWidgetWithoutTouch  
(*class in kivymd.uix.list.list*), 464  
id (*kivymd.uix.behaviors.declarative\_behavior.DeclarativeBehavior attribute*), 489  
attribute), 489  
IDLE\_DETECTION  
(*kivymd.tools.hotreload.app.MDApp attribute*), 546  
attribute), 546  
IDLE\_TIMEOUT  
(*kivymd.tools.hotreload.app.MDApp attribute*), 546  
attribute), 546  
ILeftBodyTouch  
(*class in kivymd.uix.list.list*), 462  
ImageLeftWidget  
(*class in kivymd.uix.list.list*), 463  
ImageLeftWidgetWithoutTouch  
(*class in kivymd.uix.list.list*), 463  
ImageRightWidget  
(*class in kivymd.uix.list.list*), 463  
ImageRightWidgetWithoutTouch  
(*class in kivymd.uix.list.list*), 464  
attribute), 464  
images\_path  
(*in module kivymd*), 537  
indicator\_color  
(*kivymd.uix.tab.tab.MDTabs attribute*), 337  
attribute), 337  
input\_field\_background\_color  
(*kivymd.uix.pickers.datepicker.datepicker.BaseDialogPicker attribute*), 537

*attribute), 265*

`input_field_background_color_focus` (*kivymd.uix.pickers.datepicker.datepicker.BaseDialogPicker*.*attribute*), 264

`input_field_background_color_normal` (*kivymd.uix.pickers.datepicker.datepicker.BaseDialogPicker*.*attribute*), 263

`input_field_cls` (*kivymd.uix.pickers.datepicker.datepicker.BaseDialogPicker*.*attribute*), 271

`input_field_text_color` (*kivymd.uix.pickers.datepicker.datepicker.BaseDialogPicker*.*attribute*), 265

`input_field_text_color_focus` (*kivymd.uix.pickers.datepicker.datepicker.BaseDialogPicker*.*attribute*), 266

`input_field_text_color_normal` (*kivymd.uix.pickers.datepicker.datepicker.BaseDialogPicker*.*attribute*), 265

`input_filter()` (*kivymd.uix.pickers.datepicker.DatePicker*.*method*), 268

`install_idle()` (*kivymd.tools.hotreload.app.MDApp*.*method*), 547

`interval` (*kivymd.effects.roulettescroll.roulettescroll.RouletteScrollView*.*attribute*), 522

`IRightBodyTouch` (*class in kivymd.uix.list.list*), 463

`is_date_valaid()` (*kivymd.uix.pickers.datepicker.datepicker.DatePicker*.*method*), 272

`is_numeric()` (*kivymd.uix.pickers.datepicker.datepicker.DatePicker*.*method*), 268

`items` (*kivymd.uix.dialog.dialog.MDDialog*.*attribute*), 410

`items` (*kivymd.uix.menu.menu.MDDropdownMenu*.*attribute*), 305

`items_spacing` (*kivymd.uix.swiper.swiper.MDSwiper*.*attribute*), 442

## K

`kivymd` module, 537

`kivymd.app` module, 27

`kivymd.color_definitions` module, 29

`kivymd.effects` module, 539

`kivymd.effects.fadingedge` module, 539

`kivymd.effects.fadingedge.fadingedge` module, 519

`kivymd.effects.roulettescroll` module, 539

`kivymd.effects.roulettescroll.roulettescroll` module, 521

`kivymd.effects.stiffscroll` module, 539

`kivymd.effects.stiffscroll.stiffscroll` module, 518

`kivymd.factory_registers` module, 538

`kivymd.font_definitions` module, 35

`kivymd.material_definitions` module, 32

`kivymd.material_resources` module, 538

`kivymd.theming` module, 7

`kivymd.theming_dynamic_text` module, 538

`kivymd.toast` module, 539

`kivymd.toast.androidtoast` module, 540

`kivymd.toast.kivytoast` module, 541

`kivymd.toast.kivytoast.kivytoast` module, 541

`kivymd.tools` module, 543

`kivymd.tools.argument_parser` module, 543

`kivymd.tools.hotreload` module, 544

`kivymd.tools.hotreload.app` module, 544

`kivymd.tools.packaging` module, 548

`kivymd.tools.packaging.pyinstaller` module, 548

`kivymd.tools.packaging.pyinstaller.hook-kivymd` module, 549

`kivymd.tools.patterns` module, 549

`kivymd.tools.patterns.add_view` module, 549

`kivymd.tools.patterns.create_project` module, 550

`kivymd.tools.patterns.MVC` module, 556

`kivymd.tools.patterns.MVC.libs` module, 557

`kivymd.tools.patterns.MVC.libs.translation` module, 557

`kivymd.tools.patterns.MVC.Model` module, 556

`kivymd.tools.patterns.MVC.Model.database_firebase`

```
    module, 556
kivymd.tools.patterns.MVC.Model.database_rest module, 561
    module, 556
kivymd.tools.release module, 140
    module, 558
kivymd.tools.release.git_commands module, 61
    module, 558
kivymd.tools.release.make_release module, 558
    module, 114
kivymd.tools.release.update_icons module, 561
    module, 559
kivymd.uix module, 561
    module, 560
kivymd.uix.anchorlayout module, 226
    module, 36
kivymd.uix.backdrop module, 78
    module, 561
kivymd.uix.backdrop.backdrop module, 562
    module, 157
kivymd.uix.banner module, 464
    module, 561
kivymd.uix.banner.banner module, 562
    module, 221
kivymd.uix.behaviors module, 472
    module, 561
kivymd.uix.behaviors.backgroundcolor_behavior kivymd.uix.datatables
    module, 490 module, 562
kivymd.uix.behaviors.declarative_behavior kivymd.uix.datatables.datatables
    module, 483 module, 90
kivymd.uix.behaviors.elevation kivymd.uix.dialog
    module, 562 module, 562
kivymd.uix.behaviors.focus_behavior kivymd.uix.dialog.dialog
    module, 405 module, 516
kivymd.uix.behaviors.hover_behavior kivymd.uix.dropdownitem
    module, 479 module, 562
kivymd.uix.behaviors.magic_behavior kivymd.uix.dropdownitem.dropdownitem
    module, 427 module, 496
kivymd.uix.behaviors.ripple_behavior kivymd.uix.expansionpanel
    module, 491 module, 562
kivymd.uix.behaviors.rotate_behavior kivymd.uix.expansionpanel.expansionpanel
    module, 284 module, 514
kivymd.uix.behaviors.scale_behavior kivymd.uix.filemanager
    module, 474 module, 562
kivymd.uix.behaviors.stencil_behavior kivymd.uix.filemanager.filemanager
    module, 417 module, 481
kivymd.uix.behaviors.toggle_behavior kivymd.uix.fitimage
    module, 563 module, 476
kivymd.uix.behaviors.touch_behavior kivymd.uix.fitimage.fitimage
    module, 346 module, 473
kivymd.uix.bottomnavigation kivymd.uix.floatlayout
    module, 79 module, 561
kivymd.uix.bottomnavigation.bottomnavigation kivymd.uix.gridlayout
    module, 76 module, 430
kivymd.uix.bottomsheet kivymd.uix.hero
```

```

        module, 65
kivymd.uix.imagelist
    module, 563
kivymd.uix.imagelist.imagelist
    module, 80
kivymd.uix.label
    module, 563
kivymd.uix.label.label
    module, 288
kivymd.uix.list
    module, 563
kivymd.uix.list.list
    module, 444
kivymd.uix.menu
    module, 563
kivymd.uix.menu.menu
    module, 295
kivymd.uix.navigationdrawer
    module, 563
kivymd.uix.navigationdrawer.navigationdrawer
    module, 349
kivymd.uix.navigationrail
    module, 563
kivymd.uix.navigationrail.navigationrail
    module, 180
kivymd.uix.pickers
    module, 564
kivymd.uix.pickers.colorpicker
    module, 564
kivymd.uix.pickers.colorpicker.colorpicker
    module, 273
kivymd.uix.pickers.datepicker
    module, 564
kivymd.uix.pickers.datepicker.datepicker
    module, 248
kivymd.uix.pickers.timepicker
    module, 564
kivymd.uix.pickers.timepicker.timepicker
    module, 277
kivymd.uix.progressbar
    module, 564
kivymd.uix.progressbar.progressbar
    module, 213
kivymd.uix.recyclegridlayout
    module, 38
kivymd.uix.recycleview
    module, 62
kivymd.uix.refreshlayout
    module, 564
kivymd.uix.refreshlayout.refreshlayout
    module, 88
kivymd.uix.relativelayout
    module, 64
kivymd.uix.responsivelayout
        module, 54
kivymd.uix.screen
    module, 59
kivymd.uix.screenmanager
    module, 60
kivymd.uix.scrollview
    module, 53
kivymd.uix.segmentedcontrol
    module, 564
kivymd.uix.segmentedcontrol.segmentedcontrol
    module, 400
kivymd.uix.selection
    module, 564
kivymd.uix.selection.selection
    module, 241
kivymd.uix.selectioncontrol
    module, 565
kivymd.uix.selectioncontrol.selectioncontrol
    module, 388
kivymd.uix.slider
    module, 565
kivymd.uix.slider.slider
    module, 109
kivymd.uix.silverappbar
    module, 565
kivymd.uix.silverappbar.silverappbar
    module, 149
kivymd.uix.snackbar
    module, 565
kivymd.uix.snackbar.snackbar
    module, 339
kivymd.uix.spinner
    module, 565
kivymd.uix.spinner.spinner
    module, 314
kivymd.uix.stacklayout
    module, 63
kivymd.uix.swiper
    module, 565
kivymd.uix.swiper.swiper
    module, 438
kivymd.uix.tab
    module, 565
kivymd.uix.tab.tab
    module, 317
kivymd.uix.taptargetview
    module, 40
kivymd.uix.templates
    module, 566
kivymd.uix.templates.rotatewidget
    module, 566
kivymd.uix.templates.rotatewidget.rotatewidget
    module, 523
kivymd.uix.templates.scalewidget

```

module, 566  
kivymd.uix.templates.scalewidget.scalewidget  
    module, 524  
kivymd.uix.templates.stencilwidget  
    module, 566  
kivymd.uix.templates.stencilwidget.stencilwidget  
    module, 524  
kivymd.uix.textfield  
    module, 566  
kivymd.uix.textfield.textfield  
    module, 371  
kivymd.uix.toolbar  
    module, 566  
kivymd.uix.toolbar.toolbar  
    module, 164  
kivymd.uix.tooltip  
    module, 566  
kivymd.uix.tooltip.tooltip  
    module, 218  
kivymd.uix.transition  
    module, 567  
kivymd.uix.transition.transition  
    module, 428  
kivymd.uix.widget  
    module, 37  
kivymd.utils  
    module, 567  
kivymd.utils.asynckivy  
    module, 567  
kivymd.utils.fpsmonitor  
    module, 567  
kivymd.utils.set\_bars\_colors  
    module, 568  
kivymd\_path                     (in module  
                                  kivymd.tools.release.update\_icons), 559  
KV\_DIRS (kivymd.tools.hotreload.app.MDApp attribute),  
      546  
KV\_FILES (kivymd.tools.hotreload.app.MDApp attribute),  
      546

**L**

label\_bg\_color (kivymd.uix.button.button.MDFloatingActionButtonSpeedDial attribute), 134  
label\_check\_texture\_size()  
    (kivymd.toast.kivytoast.kivytoast.Toast method), 542  
label\_radius (kivymd.uix.button.button.MDFloatingActionButtonSpeedDial attribute), 134  
label\_text\_color (kivymd.uix.button.button.MDFloatingActionButtonSpeedDial attribute), 133  
lay\_canvas\_instructions()  
    (kivymd.uix.behaviors.ripple\_behavior.CircularRippleBehavior method), 495

**M**

    lay\_canvas\_instructions()  
        (kivymd.uix.behaviors.ripple\_behavior.CommonRipple method), 495  
    lay\_canvas\_instructions()  
        (kivymd.uix.behaviors.ripple\_behavior.RectangularRippleBehavior method), 495  
    left\_action (kivymd.uix.banner.banner.MDBanner attribute), 225  
    left\_action\_items (kivymd.uix.backdrop.backdrop.MDBackdrop attribute), 161  
    left\_action\_items (kivymd.uix.toolbar.toolbar.MDTopAppBar attribute), 171  
    light\_colors (in module kivymd.color\_definitions), 32  
    line\_anim (kivymd.uix.textfield.textfield.MDTextField attribute), 382  
    line\_anim (kivymd.uix.textfield.textfield.MDTextFieldRect attribute), 377  
    line\_color (kivymd.uix.behaviors.backgroundcolor\_behavior.BackgroundColor attribute), 490  
    line\_color (kivymd.uix.button.button.BaseButton attribute), 130  
    line\_color\_disabled  
        (kivymd.uix.button.button.BaseButton attribute), 130  
    line\_color\_focus (kivymd.uix.textfield.textfield.MDTextField attribute), 382  
    line\_color\_normal (kivymd.uix.textfield.textfield.MDTextField attribute), 381  
    line\_width (kivymd.uix.behaviors.backgroundcolor\_behavior.BackgroundColor attribute), 491  
    line\_width (kivymd.uix.button.button.BaseButton attribute), 130  
    line\_width (kivymd.uix.spinner.spinner.MDSpinner attribute), 317  
lines (kivymd.uix.imagelist.imagelist.MDSmartTile attribute), 86  
load\_all\_kv\_files() (kivymd.app.MDApp method), 29  
load\_app\_dependencies()  
    (kivymd.tools.hotreload.app.MDApp method), 547  
lock\_swipe (kivymd.uix.tab.tab.MDTabs attribute), 337

    lock\_swipe (kivymd.uix.tab.tab.MDTabs attribute), 337

**M**

    magic\_speed (kivymd.uix.behaviors.magic\_behavior.MagicBehavior attribute), 497  
    MagicBehavior (class in kivymd.uix.behaviors.magic\_behavior), 497  
    main() (in module kivymd.tools.patterns.add\_view), 550  
    main() (in module kivymd.tools.patterns.create\_project), 556  
    main() (in module kivymd.tools.release.make\_release), 559

`main()` (in module `kivymd.tools.release.update_icons`), 560  
`make_icon_definitions()` (in module `kivymd.tools.release.update_icons`), 560  
`material_style` (kivymd.theming.ThemeManager attribute), 16  
`max` (kivymd.effects.roulettescroll.roulettescroll.RouletteScrollEffect attribute), 160  
`max` (kivymd.effects.stiffscroll.stiffscroll.StiffScrollEffect attribute), 518  
`max_date` (kivymd.uix.pickers.datepicker.MDDatePicker attribute), 271  
`max_degree` (kivymd.uix.circularlayout.MDCircularLayout attribute), 58  
`max_friction` (kivymd.effects.stiffscroll.stiffscroll.StiffScrollEffect attribute), 518  
`max_height` (kivymd.uix.menu.menu.MDDropdownMenu attribute), 307  
`max_height` (kivymd.uix.sliverappbar.sliverappbar.MDSliverAppbar attribute), 154  
`max_height` (kivymd.uix.textfield.textfield.MDTextField attribute), 386  
`max_length_text_color` (kivymd.uix.textfield.textfield.MDTextField attribute), 384  
`MAX_NAV_DRAWER_WIDTH` (in module `kivymd.material_resources`), 538  
`max_opacity` (kivymd.uix.sliverappbar.sliverappbar.MDSliverAppbar attribute), 155  
`max_opened_x` (kivymd.uix.card.card.MDCardSwipe attribute), 239  
`max_swipe_x` (kivymd.uix.card.card.MDCardSwipe attribute), 239  
`max_text_length` (kivymd.uix.textfield.textfield.MDTextField attribute), 377  
`max_year` (kivymd.uix.pickers.datepicker.MDDatePicker attribute), 270  
`md_bg_bottom_color` (kivymd.uix.toolbar.toolbar.MDTopAppBar attribute), 175  
`md_bg_color` (kivymd.uix.behaviors.backgroundcolor\_behavior.BackgroundColorBehavior attribute), 490  
`md_bg_color` (kivymd.uix.button.button.BaseButton attribute), 130  
`md_bg_color` (kivymd.uix.dialog.dialog.MDDialog attribute), 416  
`md_bg_color` (kivymd.uix.segmentedcontrol.segmentedcontrol.MDSegmentedControl attribute), 402  
`md_bg_color` (kivymd.uix.sliverappbar.sliverappbar.MDSliverAppbar attribute), 152  
`md_bg_color` (kivymd.uix.toolbar.toolbar.MDBottomAppBar attribute), 179  
`md_bg_color_disabled` (kivymd.uix.button.button.BaseButton attribute), 130  
`md_icons` (in module `kivymd.icon_definitions`), 35  
`MADaptiveWidget` (class in `kivymd.uix`), 560  
`MDAnchorLayout` (class in `kivymd.uix.anchorlayout`), 37  
`MDApp` (class in `kivymd.app`), 29  
`MDApp` (class in `kivymd.tools.hotreload.app`), 545  
`MDBackdrop` (class in `kivymd.uix.backdrop.backdrop`), 160  
`MDBackdropBackLayer` (class in `kivymd.uix.backdrop.backdrop`), 164  
`MDBackdropFrontLayer` (class in `kivymd.uix.backdrop.backdrop`), 164  
`MDBackdropToolbar` (class in `kivymd.uix.backdrop.backdrop`), 164  
`MDBanner` (class in `kivymd.uix.banner.banner`), 224  
`MDBottomAppBar` (class in `kivymd.uix.toolbar.toolbar`), 179  
`MDBottomNavigation` (class in `kivymd.uix.bottomnavigation.bottomnavigation`), 433  
`MDBottomNavigationItem` (class in `kivymd.uix.bottomnavigation.bottomnavigation`), 434  
`MDBottomSheet` (class in `kivymd.uix.bottomsheet.bottomsheet`), 145  
`MDBoxLayout` (class in `kivymd.uix.boxlayout`), 62  
`MDCard` (class in `kivymd.uix.card.card`), 238  
`MDCardSwipe` (class in `kivymd.uix.card.card`), 238  
`MDCardSwipeFrontBox` (class in `kivymd.uix.card.card`), 241  
`MDCardSwipeLayerBox` (class in `kivymd.uix.card.card`), 241  
`MDCarousel` (class in `kivymd.uix.carousel`), 79  
`MDCheckbox` (class in `kivymd.uix.selectioncontrol.selectioncontrol`), 58  
`MDChip` (class in `kivymd.uix.chip.chip`), 471  
`MDCircularLayout` (class in `kivymd.uix.circularlayout`), 58  
`MDColorPicker` (class in `kivymd.uix.pickers.colorpicker.colorpicker`), 175  
`MDCustomBottomSheet` (class in `kivymd.uix.bottomsheet.bottomsheet`), 147  
`MDDataTable` (class in `kivymd.uix.datatables.datatables`), 91  
`MDDatePicker` (class in `kivymd.uix.datepicker.datepicker`), 269  
`MDSegment` (class in `kivymd.uix.segmentedcontrol.segmentedcontrol`), 402  
`MDSlider` (class in `kivymd.uix.slider.slider`), 407  
`MDDropDownItem` (class in `kivymd.uix.dropdownitem.dropdownitem`), 428  
`MDDropdownMenu` (class in `kivymd.uix.menu.menu`), 304  
`MDExpansionPanel` (class in `kivymd.uix.expansionpanel.expansionpanel`), 428

MDEExpansionPanelLabel	(class in <i>kivymd.uix.expansionpanel.expansionpanel</i> ), 286	in <i>kivymd.uix.navigationdrawer.navigationdrawer</i> ), 365
MDEExpansionPanelOneLine	(class in <i>kivymd.uix.expansionpanel.expansionpanel</i> ), 286	in <i>MDDNavigationLayout</i> (class in <i>kivymd.uix.navigationdrawer.navigationdrawer</i> ), 359
MDEExpansionPanelThreeLine	(class in <i>kivymd.uix.expansionpanel.expansionpanel</i> ), 286	in <i>MDDNavigationRail</i> (class in <i>kivymd.uix.navigationrail.navigationrail</i> ), 198
MDEExpansionPanelTwoLine	(class in <i>kivymd.uix.expansionpanel.expansionpanel</i> ), 286	in <i>MDDNavigationRailFabButton</i> (class in <i>kivymd.uix.navigationrail.navigationrail</i> ), 190
MDFadeSlideTransition	(class in <i>kivymd.uix.transition.transition</i> ), 429	in <i>MDDNavigationRailItem</i> (class in <i>kivymd.uix.navigationrail.navigationrail</i> ), 192
MDFFileManager	(class in <i>kivymd.uix.filemanager.filemanager</i> ), 421	in <i>MDDNavigationRailMenuButton</i> (class in <i>kivymd.uix.navigationrail.navigationrail</i> ), 191
MDFillRoundFlatButton	(class in <i>kivymd.uix.button.button</i> ), 131	in <i>MDProgressBar</i> (class in <i>kivymd.uix.progressbar.progressbar</i> ), 217
MDFillRoundFlatIconButton	(class in <i>kivymd.uix.button.button</i> ), 131	in <i>MDRaisedButton</i> (class in <i>kivymd.uix.button.button</i> ), 131
MDFFlatButton	(class in <i>kivymd.uix.button.button</i> ), 131	in <i>MDRectangleFlatButton</i> (class in <i>kivymd.uix.button.button</i> ), 131
MDFloatingActionButton	(class in <i>kivymd.uix.button.button</i> ), 131	in <i>MDRectangleFlatIconButton</i> (class in <i>kivymd.uix.button.button</i> ), 131
MDFloatingActionButtonSpeedDial	(class in <i>kivymd.uix.button.button</i> ), 132	in <i>MDRecycleGridLayout</i> (class in <i>kivymd.uix.recyclegridlayout</i> ), 39
MDFloatLayout	(class in <i>kivymd.uix.floatlayout</i> ), 80	in <i>MDRecycleView</i> (class in <i>kivymd.uix.recycleview</i> ), 63
MDGridBottomSheet	(class in <i>kivymd.uix.bottomsheet.bottomsheet</i> ), 148	in <i>MDRelativeLayout</i> (class in <i>kivymd.uix.relativelayout</i> ), 65
MDGridLayout	(class in <i>kivymd.uix.gridlayout</i> ), 78	in <i>MDResponsiveLayout</i> (class in <i>kivymd.uix.responsivelayout</i> ), 55
MHeroFrom	(class in <i>kivymd.uix.hero</i> ), 76	in <i>MDRoundFlatButton</i> (class in <i>kivymd.uix.button.button</i> ), 131
MHeroTo	(class in <i>kivymd.uix.hero</i> ), 76	in <i>MDRoundFlatIconButton</i> (class in <i>kivymd.uix.button.button</i> ), 131
MDIcon	(class in <i>kivymd.uix.label.label</i> ), 294	in <i>MDScreen</i> (class in <i>kivymd.uix.screen</i> ), 59
MDIconButton	(class in <i>kivymd.uix.button.button</i> ), 131	in <i>MDScreenManager</i> (class in <i>kivymd.uix.screenmanager</i> ), 60
MDLabel	(class in <i>kivymd.uix.label.label</i> ), 293	in <i>MDScrollView</i> (class in <i>kivymd.uix.scrollview</i> ), 53
MDList	(class in <i>kivymd.uix.list.list</i> ), 460	in <i>MDScrollViewRefreshLayout</i> (class in <i>kivymd.uix.refreshlayout.refreshlayout</i> ), 90
MDListBottomSheet	(class in <i>kivymd.uix.bottomsheet.bottomsheet</i> ), 147	in <i>MDSegmentedControl</i> (class in <i>kivymd.uix.segmentedcontrol.segmentedcontrol</i> ), 360
MDDNavigationDrawer	(class in <i>kivymd.uix.navigationdrawer.navigationdrawer</i> ), 366	in <i>MDSegmentedControlItem</i> (class in <i>kivymd.uix.segmentedcontrol.segmentedcontrol</i> ), 402
MDDNavigationDrawerDivider	(class in <i>kivymd.uix.navigationdrawer.navigationdrawer</i> ), 360	in <i>MDSelectionList</i> (class in <i>kivymd.uix.selection.selection</i> ), 246
MDDNavigationDrawerHeader	(class in <i>kivymd.uix.navigationdrawer.navigationdrawer</i> ), 361	in <i>MDSeparator</i> (class in <i>kivymd.uix.card.card</i> ), 238
MDDNavigationDrawerItem	(class in <i>kivymd.uix.navigationdrawer.navigationdrawer</i> ), 364	in <i>MDSlider</i> (class in <i>kivymd.uix.slider.slider</i> ), 110
MDDNavigationDrawerLabel	(class in <i>kivymd.uix.navigationdrawer.navigationdrawer</i> ), 359	in <i>MDSlideTransition</i> (class in <i>kivymd.uix.transition.transition</i> ), 429
MDDNavigationDrawerMenu	(class in <i>kivymd.uix.navigationdrawer.navigationdrawer</i> ), 364	

MDSliverAppbar (class in `kivymd.uix.sliverappbar.sliverappbar`), 152  
MDSliverAppBarContent (class in `kivymd.uix.sliverappbar.sliverappbar`), 152  
MDSliverAppBarHeader (class in `kivymd.uix.sliverappbar.sliverappbar`), 152  
MDSmartTile (class in `kivymd.uix.imagelist.imagelist`), 82  
MDSpinner (class in `kivymd.uix.spinner.spinner`), 316  
MDStackLayout (class in `kivymd.uix.stacklayout`), 64  
MDSwapTransition (class in `kivymd.uix.transition.transition`), 429  
MDSwiper (class in `kivymd.uix.swiper.swiper`), 442  
MDSwiperItem (class in `kivymd.uix.swiper.swiper`), 442  
MDSwitch (class in `kivymd.uix.selectioncontrol.selectioncontrol`), 394  
MDTab (class in `kivymd.uix.bottomnavigation.bottomnavigation`), 434  
MTABs (class in `kivymd.uix.tab.tab`), 335  
MTABsBase (class in `kivymd.uix.tab.tab`), 334  
MDTapTargetView (class in `kivymd.uix.taptargetview`), 49  
MDTextButton (class in `kivymd.uix.button.button`), 132  
MDTextField (class in `kivymd.uix.textfield.textfield`), 377  
MDTextFieldRect (class in `kivymd.uix.textfield.textfield`), 376  
MDTimePicker (class in `kivymd.uix.pickers.timepicker.timepicker`), 281  
MDToggleButton (class in `kivymd.uix.behaviors.toggle_behavior`), 479  
MDTooltip (class in `kivymd.uix.tooltip.tooltip`), 219  
MDTooltipViewClass (class in `kivymd.uix.tooltip.tooltip`), 221  
MDTopAppBar (class in `kivymd.uix.toolbar.toolbar`), 171  
MDTransitionBase (class in `kivymd.uix.transition.transition`), 429  
MDWidget (class in `kivymd.uix.widget`), 38  
min (`kivymd.effects.roulettescroll.roulettescroll.RouletteScrollEffect` attribute), 522  
min (`kivymd.effects.stiffscroll.stiffscroll.StiffScrollEffect` attribute), 518  
min\_date (`kivymd.uix.pickers.datepicker.datepicker.MDDatePicker` attribute), 271  
min\_year (`kivymd.uix.pickers.datepicker.datepicker.MDDatePicker` attribute), 270  
minute (`kivymd.uix.pickers.timepicker.timepicker.MDTimePicker` attribute), 281  
minute\_radius (`kivymd.uix.pickers.timepicker.timepicker.MDTimePicker` attribute), 281  
mipmap (`kivymd.uix.fitimage.fitimage.FitImage` attribute), 349  
mipmap (`kivymd.uix.imagelist.imagelist.MDSmartTile` attribute), 87  
in `mobile_view(kivymd.uix.responsivelayout.MDResponsiveLayout` attribute), 55  
in mode (`kivymd.uix.pickers.datepicker.datepicker.MDDatePicker` attribute), 270  
in mode (`kivymd.uix.textfield.textfield.MDTextField` attribute), 377  
mode (`kivymd.uix.toolbar.toolbar.MDTopAppBar` attribute), 173  
module  
kivymd, 537  
kivymd.app, 27  
kivymd.color\_definitions, 29  
kivymd.effects, 539  
kivymd.effects.fadingedge, 539  
kivymd.effects.fadingedge.fadingedge, 519  
kivymd.effects.roulettescroll, 539  
kivymd.effects.roulettescroll.roulettescroll, 521  
kivymd.effects.stiffscroll, 539  
kivymd.effects.stiffscroll.stiffscroll, 518  
kivymd.factory\_registers, 538  
kivymd.font\_definitions, 35  
kivymd.icon\_definitions, 32  
kivymd.material\_resources, 538  
kivymd.theming, 7  
kivymd.theming\_dynamic\_text, 538  
kivymd.toast, 539  
kivymd.toast.androidtoast, 539  
kivymd.toast.androidtoast.androidtoast, 540  
kivymd.toast.kivytoast, 541  
kivymd.toast.kivytoast.kivytoast, 541  
kivymd.tools, 543  
kivymd.tools.argument\_parser, 543  
kivymd.tools.hotreload, 544  
kivymd.tools.hotreload.app, 544  
kivymd.tools.packaging, 548  
kivymd.tools.packaging.pyinstaller, 548  
kivymd.tools.packaging.pyinstaller.hook-kivymd, 549  
kivymd.tools.patterns, 549  
kivymd.tools.patterns.add\_view, 549  
kivymd.tools.patterns.create\_project, 550  
kivymd.tools.patterns.MVC, 556  
kivymd.tools.patterns.MVC.libs, 557  
kivymd.tools.patterns.MVC.translation, 557  
kivymd.tools.patterns.MVC.Model, 556  
kivymd.tools.patterns.MVC.Model.database\_firebase, 556  
kivymd.tools.patterns.MVC.Model.database\_restdb, 556  
kivymd.tools.release, 558

kivymd.tools.release.git\_commands, 558  
kivymd.tools.release.make\_release, 558  
kivymd.tools.release.update\_icons, 559  
kivymd.uix, 560  
kivymd.uix.anchorlayout, 36  
kivymd.uix.backdrop, 561  
kivymd.uix.backdrop.backdrop, 157  
kivymd.uix.banner, 561  
kivymd.uix.banner.banner, 221  
kivymd.uix.behaviors, 561  
kivymd.uix.behaviors.backgroundcolor\_behavior, kivymd.uix.menu, 563  
490  
kivymd.uix.behaviors.declarative\_behavior, 483  
kivymd.uix.behaviors.elevation, 498  
kivymd.uix.behaviors.focus\_behavior, 516  
kivymd.uix.behaviors.hover\_behavior, 479  
kivymd.uix.behaviors.magic\_behavior, 496  
kivymd.uix.behaviors.ripple\_behavior, 491  
kivymd.uix.behaviors.rotate\_behavior, 514  
kivymd.uix.behaviors.scale\_behavior, 474  
kivymd.uix.behaviors.stencil\_behavior, 481  
kivymd.uix.behaviors.toggle\_behavior, 476  
kivymd.uix.behaviors.touch\_behavior, 473  
kivymd.uix.bottomnavigation, 561  
kivymd.uix.bottomnavigation.bottomnavigation, 430  
kivymd.uix.bottomsheet, 561  
kivymd.uix.bottomsheet.bottomsheet, 140  
kivymd.uix.boxlayout, 61  
kivymd.uix.button, 561  
kivymd.uix.button.button, 114  
kivymd.uix.card, 561  
kivymd.uix.card.card, 226  
kivymd.uix.carousel, 78  
kivymd.uix.chip, 562  
kivymd.uix.chip.chip, 464  
kivymd.uix.circularlayout, 56  
kivymd.uix.controllers, 562  
kivymd.uix.controllers.windowcontroller, 472  
kivymd.uix.datatables, 562  
kivymd.uix.datatables.datatables, 90  
kivymd.uix.dialog, 562  
kivymd.uix.dialog.dialog, 405  
kivymd.uix.dropdownitem, 562  
kivymd.uix.dropdownitem.dropdownitem, 427  
kivymd.uix.expansionpanel, 562  
kivymd.uix.expansionpanel.expansionpanel, 284  
kivymd.uix.filemanager, 562  
kivymd.uix.filemanager.filemanager, 417  
kivymd.uix.fitimage, 563  
kivymd.uix.fitimage.fitimage, 346  
kivymd.uix.floatlayout, 79  
kivymd.uix.gridlayout, 76  
kivymd.uix.hero, 65  
kivymd.uix.imagelist, 563  
kivymd.uix.imagelist.imagelist, 80  
kivymd.uix.label, 563  
kivymd.uix.label.label, 288  
kivymd.uix.list, 563  
kivymd.uix.list.list, 444  
kivymd.uix.menu, 563  
kivymd.uix.menu.menu, 295  
kivymd.uix.navigationdrawer, 563  
kivymd.uix.navigationdrawer.navigationdrawer, 349  
kivymd.uix.navigationrail, 563  
kivymd.uix.navigationrail.navigationrail, 180  
kivymd.uix.pickers, 564  
kivymd.uix.pickers.colorpicker, 564  
kivymd.uix.pickers.colorpicker.colorpicker, 273  
kivymd.uix.pickers.datepicker, 564  
kivymd.uix.pickers.datepicker.datepicker, 248  
kivymd.uix.pickers.timepicker, 564  
kivymd.uix.pickers.timepicker.timepicker, 277  
kivymd.uix.progressbar, 564  
kivymd.uix.progressbar.progressbar, 213  
kivymd.uix.recyclegridlayout, 38  
kivymd.uix.recycleview, 62  
kivymd.uix.refreshlayout, 564  
kivymd.uix.refreshlayout.refreshlayout, 88  
kivymd.uix.relativelayout, 64  
kivymd.uix.responsivewidget, 54  
kivymd.uix.screen, 59  
kivymd.uix.screenmanager, 60  
kivymd.uix.scrollview, 53  
kivymd.uix.segmentedcontrol, 564  
kivymd.uix.segmentedcontrol.segmentedcontrol, 400  
kivymd.uix.selection, 564  
kivymd.uix.selection.selection, 241  
kivymd.uix.selectioncontrol, 565  
kivymd.uix.selectioncontrol.selectioncontrol, 388  
kivymd.uix.slider, 565  
kivymd.uix.slider.slider, 109  
kivymd.uix.sliverrappbar, 565  
kivymd.uix.sliverrappbar.sliverrappbar, 149  
kivymd.uix.snackbar, 565  
kivymd.uix.snackbar.snackbar, 339

kivymd.uix.spinner, 565  
 kivymd.uix.spinner.spinner, 314  
 kivymd.uix.stacklayout, 63  
 kivymd.uix.swiper, 565  
 kivymd.uix.swiper.swiper, 438  
 kivymd.uix.tab, 565  
 kivymd.uix.tab.tab, 317  
 kivymd.uix.taptargetview, 40  
 kivymd.uix.templates, 566  
 kivymd.uix.templates.rotatewidget, 566  
 kivymd.uix.templates.rotatewidget.rotatewidget, 523  
 kivymd.uix.templates.scalewidget, 566  
 kivymd.uix.templates.scalewidget.scalewidget, 524  
 kivymd.uix.templates.stencilwidget, 566  
 kivymd.uix.templates.stencilwidget.stencilwidget, 524  
 kivymd.uix.textfield, 566  
 kivymd.uix.textfield.textfield, 371  
 kivymd.uix.toolbar, 566  
 kivymd.uix.toolbar.toolbar, 164  
 kivymd.uix.tooltip, 566  
 kivymd.uix.tooltip.tooltip, 218  
 kivymd.uix.transition, 567  
 kivymd.uix.transition.transition, 428  
 kivymd.uix.widget, 37  
 kivymd.utils, 567  
 kivymd.utils.asynckivy, 567  
 kivymd.utils.fpsmonitor, 567  
 kivymd.utils.set\_bars\_colors, 568  
 monotonic (in module kivymd.tools.hotreload.app), 545  
 month (kivymd.uix.pickers.datepicker.datepicker.MDDatePicker attribute), 270  
 move\_changelog() (in module kivymd.tools.release.make\_release), 559

## N

name (kivymd.tools.patterns.MVC.Model.database\_firebase.Database attribute), 556  
 name (kivymd.tools.patterns.MVC.Model.database\_restdb.DataBase attribute), 557  
 navigation\_rail (kivymd.uix.navigationrail.navigationrail.MDNavigationRail attribute), 192  
 near\_next\_notch() (kivymd.effects.roulettescroll.roulette\_scroll.RouletteScroll method), 523  
 near\_notch() (kivymd.effects.roulettescroll.roulette\_scroll.RouletteScroll method), 523  
 nearest\_notch() (kivymd.effects.roulettescroll.roulette\_scroll.RouletteScroll method), 523  
 next\_notch() (kivymd.effects.roulettescroll.roulette\_scroll.RouletteScroll method), 523  
 no\_ripple\_effect (kivymd.uix.tab.tab.MDTabs attribute), 337

**O**  
 observers (kivymd.tools.patterns.MVC.libs.translation.Translation attribute), 557  
 on\_is\_off() (kivymd.uix.slider.slider.MDSlider method), 113  
 on\_rotation\_angle() (kivymd.uix.spinner.spinner.MDSpinner method), 317  
 on\_action\_button() (kivymd.uix.toolbar.toolbar.MDTopAppBar method), 178  
 on\_active() (kivymd.uix.chip.chip.MDChip method), 471  
 on\_active() (kivymd.uix.navigationrail.navigationrail.MDNavigationRail method), 198  
 on\_active() (kivymd.uix.segmentedcontrol.segmentedcontrol.MDSegmentedControl method), 404  
 on\_active() (kivymd.uix.selectioncontrol.selectioncontrol.MDCheckbox method), 394  
 on\_active() (kivymd.uix.selectioncontrol.selectioncontrol.MDSwitch method), 399  
 on\_active() (kivymd.uix.slider.slider.MDSlider method), 113  
 on\_active() (kivymd.uix.spinner.spinner.MDSpinner method), 317  
 on\_adaptive\_height() (kivymd.uix.MDAdaptiveWidget method), 560  
 on\_adaptive\_size() (kivymd.uix.MDAdaptiveWidget method), 560  
 on\_adaptive\_width() (kivymd.uix.MDAdaptiveWidget method), 560  
 on\_anchor() (kivymd.uix.card.card.MDCardSwipe method), 240  
 on\_anchor\_title() (kivymd.uix.toolbar.toolbar.MDTopAppBar method), 178  
 on\_background\_color() (kivymd.uix.sliverappbar.sliverappbar.MDSliverAppbar method), 156  
 on\_background\_color\_toolbar() (kivymd.uix.filemanager.filemanager.MDFileManager method), 426  
 on\_background\_down\_button\_selected\_type\_color() (kivymd.uix.RailPickers.colorpicker.colorpicker.MDCColorPicker method), 276  
 on\_bg\_color\_stack\_button() (kivymd.uix.button.button.MDFloatingActionButtonSpeedDial method), 139  
 on\_bg\_color\_stack\_button() (kivymd.uix.button.button.MDFloatingActionButtonSpeedDial method), 139  
 on\_bg\_color\_stack\_button() (kivymd.uix.button.button.MDFloatingActionButtonSpeedDial method), 139  
 on\_buttons() (kivymd.uix.snackbar.snackbar.BaseSnackbar method), 345

on\_cancel() (*kivymd.uix.pickers.datepicker.datepicker.BaseDialog*.*cancel*), 132  
    method), 268

on\_carousel\_index() (*kivymd.uix.tab.tab.MDTabs*.*set\_index*), 339

on\_change\_screen\_type() (*kivymd.uix.responsivelayout.MDResponsiveLayout*.*change\_screen*), 56

on\_check\_press() (*kivymd.uix.datatables.datatables.MDDataTable*.*check\_press*), 109

on\_close() (*kivymd.uix.backdrop.backdrop.MDBackdrop*.*close*), 163

on\_close() (*kivymd.uix.button.button.MDFloatingActionButtonSpeedDial*.*close*), 138

on\_close() (*kivymd.uix.expansionpanel.expansionpanel.MDEExpansionPanel*.*close*), 287

on\_close() (*kivymd.uix.taptargetview.MDTapTargetView*.*close*), 52

on\_coasted\_to\_stop() (*kivymd.effects.roulettescroll.roulettescroll.RouletteScrollView*.*coasted\_to\_stop*), 523

on\_color\_icon\_root\_button() (*kivymd.button.button.MDFloatingActionButtonSpeedDial*.*color\_icon\_root\_button*), 139

on\_color\_icon\_stack\_button() (*kivymd.button.button.MDFloatingActionButtonSpeedDial*.*color\_icon\_stack\_button*), 139

on\_complete() (*kivymd.uix.transition.transition.MDTransitionBase*.*complete*), 429

on\_current\_hero() (*kivymd.uix.screenmanager.MDScreenManager*.*current\_hero*), 60

on\_data() (*kivymd.uix.button.button.MDFloatingActionButtonSpeedDial*.*data*), 138

on\_description\_text() (*kivymd.uix.taptargetview.MDTapTargetView*.*description\_text*), 52

on\_description\_text\_bold() (*kivymd.uix.taptargetview.MDTapTargetView*.*description\_text\_bold*), 52

on\_description\_text\_size() (*kivymd.uix.taptargetview.MDTapTargetView*.*description\_text\_size*), 52

on\_determinate\_complete() (*kivymd.uix.spinner.spinner.MDSpinner*.*determinate\_complete*), 317

on\_device\_orientation() (*kivymd.uix.pickers.datepicker.datepicker.MDDatePicker*.*device\_orientation*), 271

on\_disabled() (*kivymd.uix.behaviors.elevation.CommonElevationBehavior*.*disabled*), 513

on\_disabled() (*kivymd.uix.bottomnavigation.bottomnavigation.MDBottomNavigation*.*disabled*), 435

on\_disabled() (*kivymd.uix.button.button.BaseButton*.*disabled*), 131

on\_disabled() (*kivymd.uix.button.button.MDTextButton*.*disabled*), 388

on\_disabled() (*kivymd.uix.textfield.textfield.MDTextField*.*disabled*), 388

on\_dismiss() (*kivymd.uix.menu.menu.MDDropdownMenu*.*dismiss*), 314

on\_dismiss() (*kivymd.uix.snackbar.snackbar.BaseSnackbar*.*dismiss*), 345

on\_dismiss() (*kivymd.uix.tooltip.tooltip.MDTooltip*.*dismiss*), 221

on\_enter() (*kivymd.uix.behaviors.touch\_behavior.TouchBehavior*.*enter*), 474

on\_enter() (*kivymd.uix.taptargetview.MDTapTargetView*.*enter*), 52

on\_elevation() (*kivymd.uix.behaviors.elevation.CommonElevationBehavior*.*elevation*), 513

on\_enter() (*kivymd.uix.behaviors.focus\_behavior.FocusBehavior*.*enter*), 481

on\_enter() (*kivymd.uix.tooltip.tooltip.MDTooltip*.*enter*), 220

on\_error() (*kivymd.uix.textfield.textfield.MDTextField*.*error*), 437

on\_focus() (*kivymd.uix.textfield.textfield.MDTextField*.*focus*), 388

on\_font\_name() (*kivymd.uix.bottomnavigation.bottomnavigation.MDBottomNavigation*.*font\_name*), 437

on\_header() (*kivymd.uix.backdrop.backdrop.MDBackdrop*.*header*), 163

on\_header\_cls() (*kivymd.uix.menu.menu.MDDropdownMenu*.*header\_cls*), 314

on\_height() (*kivymd.uix.textfield.textfield.MDTextField*.*height*), 388

on\_helper\_text() (*kivymd.uix.textfield.textfield.MDTextField*.*helper\_text*), 388

on\_helper\_text\_color\_normal() (*kivymd.uix.textfield.textfield.MDTextField*.*helper\_text\_color\_normal*), 388

on\_hero\_to() (*kivymd.uix.screen.MDScreen*.*hero\_to*), 59

on\_hint() (*kivymd.uix.slider.slider.MDSlider*.*hint*), 113

on\_hint\_animation() (*kivymd.uix.button.button.MDFloatingActionButtonSpeedDial*.*hint\_animation*), 139

on\_hint\_md\_bg\_color() (*kivymd.uix.textfield.textfield.MDTextField*.*hint\_md\_bg\_color*), 388

on\_hint\_text\_color\_normal() (*kivymd.uix.textfield.textfield.MDTextField*.*hint\_text\_color\_normal*), 388

on\_icon() (kivymd.uix.button.button.MDFloatingActionButtonSpeedDial), 220  
    method), 138  
    on\_max\_length\_text\_color()  
on\_icon() (kivymd.uix.filemanager.filemanager.MDFileManager  
    method), 426  
    (kivymd.uix.toolbar.toolbar.MDTopAppBar  
    method), 178  
    on\_md\_bg\_bottom\_color()  
    (kivymd.uix.toolbar.toolbar.MDTopAppBar  
    method), 178  
    on\_md\_bg\_color() (kivymd.uix.behaviors.backgroundcolor\_behavior.Bac  
on\_icon\_left() (kivymd.uix.textfield.textfield.MDTextField  
    method), 388  
    on\_md\_bg\_color() (kivymd.uix.label.label.MDLabel  
on\_icon\_right() (kivymd.uix.textfield.textfield.MDTextField  
    method), 388  
    on\_md\_bg\_color() (kivymd.uix.toolbar.toolbar.MDTopAppBar  
on\_icon\_right\_color\_normal()  
    (kivymd.uix.textfield.textfield.MDTextField  
    method), 388  
    on\_mode() (kivymd.uix.toolbar.toolbar.MDTopAppBar  
on\_idle() (kivymd.tools.hotreload.app.MDApp  
    method), 547  
    on\_mouse\_update() (kivymd.uix.behaviors.hover\_behavior.HoverBehavi  
on\_input\_field\_background\_color()  
    (kivymd.uix.pickers.datepicker.datepicker.BaseDialogPickermethod), 523  
    method), 268  
    on\_notch() (kivymd.effects.roulettescroll.roulettescroll.RouletteScrollEffect  
on\_input\_field\_text\_color()  
    (kivymd.uix.pickers.datepicker.datepicker.BaseDialogPickermethod), 272  
    method), 268  
    on\_opacity() (kivymd.uix.behaviors.elevation.CommonElevationBehavio  
on\_item\_press() (kivymd.uix.navigationrail.navigationrail.MDNavi  
    method), 212  
    on\_open() (kivymd.toast.kivytoast.kivytoast.Toast  
on\_item\_release() (kivymd.uix.navigationrail.navigationrail.MDNavi  
    method), 212  
    on\_open() (kivymd.uix.backdrop.backdrop.MDBackdrop  
on\_label\_text\_color()  
    (kivymd.uix.button.button.MDFloatingActionButtonSpeedDial(kivymd.uix.button.button.MDFloatingActionButtonSpeedDial  
    method), 139  
    method), 138  
on\_leave() (kivymd.uix.behaviors.focus\_behavior.FocusBehavior  
    method), 517  
    on\_open() (kivymd.uix.dialog.dialog.MDDialog  
on\_leave() (kivymd.uix.behaviors.hover\_behavior.HoverBehavior  
    method), 481  
    on\_open() (kivymd.uix.expansionpanel.expansionpanel.MDExpansionPan  
on\_leave() (kivymd.uix.bottomnavigation.bottomnavigation.MDNavi  
    method), 435  
    on\_open() (kivymd.uix.filemanager.filemanager.MDFileManager  
on\_leave() (kivymd.uix.button.button.MDFloatingActionButtonSpeedDial(kivymd.uix.pickers.colorpicker.MDCColorPicker  
    method), 138  
    method), 276  
on\_leave() (kivymd.uix.tooltip.tooltip.MDTooltip  
    method), 221  
    on\_open() (kivymd.uix.snackbar.snackbar.BaseSnackbar  
on\_left\_action\_items()  
    (kivymd.uix.backdrop.backdrop.MDBackdrop  
    method), 163  
    on\_open() (kivymd.uix.taptargetview.MDTapTargetView  
on\_left\_action\_items()  
    (kivymd.uix.toolbar.toolbar.MDTopAppBar  
    method), 178  
    on\_opposite\_colors()  
    (kivymd.uix.label.label.MDLabel  
on\_line\_color\_normal()  
    (kivymd.uix.textfield.textfield.MDTextField  
    method), 388  
    on\_orientation() (kivymd.uix.card.card.MDCardSwipe  
on\_long\_touch() (kivymd.uix.behaviors.touch\_behavior.TouchBehavior  
    method), 474  
    on\_outer\_touch() (kivymd.uix.taptargetview.MDTapTargetView  
on\_long\_touch() (kivymd.uix.chip.chip.MDChip  
    method), 471  
    on\_outside\_click() (kivymd.uix.taptargetview.MDTapTargetView  
on\_long\_touch() (kivymd.uix.tooltip.tooltip.MDTooltip  
    method), 53

method), 53  
on\_overflow\_cls() (kivymd.uix.toolbar.toolbar.MDTopAppBar method), 178  
on\_overswipe\_left() (kivymd.uix.swiper.swiper.MDSwiper method), 443  
on\_overswipe\_right() (kivymd.uix.swiper.swiper.MDSwiper method), 443  
on\_palette() (kivymd.uix.spinner.spinner.MDSpinner method), 317  
on\_pos() (kivymd.uix.behaviors.elevation.CommonElevationBehavior method), 513  
on\_pre\_dismiss() (kivymd.uix.filemanager.filemanager.MDFFileManager method), 276  
on\_pre\_open() (kivymd.uix.filemanager.filemanager.MDFFileManager method), 247  
on\_pre\_swipe() (kivymd.uix.swiper.swiper.MDSwiper method), 443  
on\_press() (kivymd.uix.button.button.MDTextButton method), 132  
on\_press() (kivymd.uix.chip.chip.MDChip method), 472  
on\_press() (kivymd.uix.imagelist.imagelist.MDSmartTile method), 87  
on\_press() (kivymd.uix.navigationrail.navigationrail.MDNavi  
method), 198  
on\_press\_segment() (kivymd.uix.segmentedcontrol.segmentedcontrol.MDSegmentedControl method), 404  
on\_press\_stack\_button() (kivymd.uix.button.button.MDFloatingActionButton method), 139  
on\_progress() (kivymd.uix.transition.transition.MDFadeTransition method), 429  
on\_radius() (kivymd.uix.behaviors.elevation.CommonElevationBehavior method), 513  
on\_radius() (kivymd.uix.navigationdrawer.navigationdrawer.MDNavi  
method), 371  
on\_ref\_press() (kivymd.uix.tab.tab.MDTabs method), 339  
on\_release() (kivymd.uix.imagelist.imagelist.MDSmartTile method), 87  
on\_release() (kivymd.uix.navigationrail.navigationrail.MDNavi  
method), 198  
on\_release() (kivymd.uix.pickers.colorpicker.colorpicker.MDCColorPicker method), 276  
on\_release\_stack\_button() (kivymd.uix.button.button.MDFloatingActionButton method), 139  
on\_resize() (kivymd.uix.bottomnavigation.bottomnavigation.MDBottomNavigation method), 437  
on\_right\_action\_items() (kivymd.uix.toolbar.toolbar.MDTopAppBar method), 178  
on\_ripple\_behavior() (kivymd.uix.card.card.MDCard method), 238  
on\_row\_press() (kivymd.uix.datatables.datatables.MDDDataTable method), 109  
on\_save() (kivymd.uix.pickers.datepicker.datepicker.BaseDialogPicker method), 268  
on\_scroll\_content() (kivymd.uix.sliverappbar.sliverappbar.MDSliverAppbar method), 155  
on\_scroll\_start() (kivymd.uix.swiper.swiper.MDSwiper method), 444  
on\_select\_color() (kivymd.uix.pickers.colorpicker.colorpicker.MDColo  
method), 437  
on\_selected() (kivymd.uix.selection.selection.MDSelectionList method), 513  
on\_selected\_color\_background() (kivymd.uix.bottonnavigation.bottonnavigation.MDBottomNavigation method), 513  
on\_shadow\_color() (kivymd.uix.behaviors.elevation.CommonElevationBehavior method), 513  
on\_shadow\_offset() (kivymd.uix.behaviors.elevation.CommonElevationBehavior method), 513  
on\_shadow\_radius() (kivymd.uix.behaviors.elevation.CommonElevationBehavior method), 513  
on\_shadow\_size() (kivymd.uix.behaviors.elevation.CommonElevationBehavior method), 513  
on\_show() (kivymd.uix.tooltip.tooltip.MDTooltip method), 221  
on\_slider() (kivymd.uix.slider.slider.MDSlider method), 113  
on\_size() (kivymd.uix.responsivelayout.MDResponsiveLayout method), 56  
on\_size() (kivymd.uix.tab.tab.MDTabs method), 339  
on\_slide\_complete() (kivymd.uix.tab.tab.MDTabs method), 339  
on\_slide\_progress() (kivymd.uix.carousel.carousel.MDCarousel method), 79  
on\_slide\_progress() (kivymd.uix.carousel.carousel.MDCarousel method), 79  
on\_slide\_progress() (kivymd.uix.tab.tab.MDTabs method), 338  
on\_slide\_progress() (kivymd.uix.tab.tab.MDTabs method), 394  
on\_swipe() (kivymd.uix.swiper.swiper.MDSwiper method), 443  
on\_swipe\_complete()

(*kivymd.uix.card.card.MDCardSwipe method*), 240  
*on\_swipe\_left()* (*kivymd.uix.swiper.swiper.MDSwiper method*), 443  
*on\_swipe\_right()* (*kivymd.uix.swiper.swiper.MDSwiper method*), 443  
*on\_switch\_tabs()* (*kivymd.uix.bottomnavigation.bottonnavigation.MDNavigationDrawer*) (*kivymd.uix.navigationdrawer.NavigationDrawer.kivytoast.Toast method*), 437  
*on\_switch\_tabs()* (*kivymd.uix.pickers.colorpicker.colorpicker.MDColorPicker*) (*kivymd.uix.behaviors.ripple\_behavior.CommonRipple method*), 276  
*on\_tab\_press()* (*kivymd.uix.bottomnavigation.bottonnavigation.MDTab*) (*kivymd.uix.tab.tab.MDTabs*) (*kivymd.uix.button.BaseButton method*), 434  
*on\_tab\_press()* (*kivymd.uix.bottomnavigation.bottonnavigation.MDTab*) (*kivymd.uix.card.card.MDCardSwipe method*), 240  
*on\_tab\_release()* (*kivymd.uix.bottomnavigation.bottonnavigation.MDTab*) (*kivymd.uix.carousel.MDCarousel method*), 79  
*on\_tab\_switch()* (*kivymd.uix.tab.tab.MDTabs*) (*kivymd.uix.list.list.BaseListItem method*), 461  
*on\_tab\_touch\_down()* (*kivymd.uix.bottomnavigation.bottonnavigation.MDTab*) (*kivymd.uix.menu.menu.MDDropdownMenu method*), 314  
*on\_tab\_touch\_move()* (*kivymd.uix.bottomnavigation.bottonnavigation.MDTab*) (*kivymd.uix.slider.slider.MDSlider method*), 113  
*on\_tab\_touch\_up()* (*kivymd.uix.bottomnavigation.bottonnavigation.MDTab*) (*kivymd.uix.swiper.swiper.MDSwiper method*), 444  
*on\_target\_radius()* (*kivymd.uix.taptargetview.MDTapTargetView*) (*kivymd.uix.behaviors.ripple\_behavior.CommonRipple method*), 53  
*on\_target\_touch()* (*kivymd.uix.taptargetview.MDTapTargetView*) (*kivymd.uix.card.card.MDCardSwipe method*), 240  
*on\_text()* (*kivymd.uix.dropdownitem.dropdownitem.MDDropDownItem*) (*kivymd.uix.list.list.BaseListItem method*), 428  
*on\_text\_color()* (*kivymd.uix.label.label.MDLabel*) (*kivymd.uix.menu.menu.MDDropdownMenu method*), 314  
*on\_text\_color\_active()* (*kivymd.uix.bottomnavigation.bottonnavigation.MDBottomNavigation*) (*kivymd.uix.navigationdrawer.NavigationDrawer*) (*kivymd.uix.behaviors.magic\_behavior.MagicBehavior method*), 497  
*on\_text\_color\_normal()* (*kivymd.uix.bottomnavigation.bottonnavigation.MDBottomNavigation*) (*kivymd.uix.behaviors.ripple\_behavior.CommonRipple method*), 495  
*on\_text\_color\_normal()* (*kivymd.uix.textfield.textfield.MDTextField*) (*kivymd.uix.button.BaseButton method*), 131  
*on\_theme\_style()* (*kivymd.theming.ThemeManager*) (*kivymd.uix.card.card.MDCardSwipe method*), 240  
*on\_theme\_text\_color()* (*kivymd.uix.label.label.MDLabel*) (*kivymd.uix.list.list.BaseListItem method*), 462  
*on\_thumb\_down()* (*kivymd.uix.selectioncontrol.selectioncontrol.MDSwipeToDelete*) (*kivymd.uix.menu.menu.MDDropdownMenu method*), 314  
*on\_title\_text()* (*kivymd.uix.taptargetview.MDTapTargetView*) (*kivymd.uix.navigationdrawer.NavigationDrawer*) (*kivymd.uix.behaviors.ripple\_behavior.CommonRipple method*), 371  
*on\_title\_text\_bold()* (*kivymd.uix.taptargetview.MDTapTargetView*) (*kivymd.uix.refreshlayout.RefreshLayout*) (*kivymd.uix.scrollview.MDScrollViewRef method*), 90

on\_touch\_up() (kivymd.uix.slider.slider.MDSlider method), 114  
on\_touch\_up() (kivymd.uix.swiper swiper.MDSwiper method), 444  
on\_transform\_in() (kivymd.uix.hero.MDHeroFrom method), 76  
on\_transform\_out() (kivymd.uix.hero.MDHeroFrom method), 76  
on\_triple\_tap() (kivymd.uix.behaviors.touch\_behavior.TopBottomBehavior method), 474  
on\_type() (kivymd.uix.button.button.MDFloatingActionButtonSpeedDial method), 132  
on\_type() (kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationDrawer method), 371  
on\_type() (kivymd.uix.toolbar.toolbar.MDTopAppBar method), 178  
on\_type\_color() (kivymd.uix.pickers.colorpicker.colorpicker.MDColorPicker method), 276  
on\_type\_height() (kivymd.uix.toolbar.toolbar.MDTopAppBar method), 178  
on\_unselected() (kivymd.uix.selection.selection.MDSelectionBehavior method), 247  
on\_use\_text() (kivymd.uix.bottomnavigation.bottomnavigation.BottomNavigation method), 437  
on\_value() (kivymd.effects.stiffscroll.stiffscroll.StiffScrollView method), 519  
on\_value\_normalized() (kivymd.uix.slider.slider.MDSlider method), 113  
on\_vbar() (kivymd.uix.sliverappbar.sliverappbar.MDSliverAppBar method), 156  
on\_wakeup() (kivymd.tools.hotreload.app.MDApp method), 547  
on\_width() (kivymd.uix.textfield.textfield.MDTextField method), 388  
on\_width() (kivymd.uix.toolbar.toolbar.MDTopAppBar method), 177  
OneLineAvatarIconListItem (class in kivymd.uix.list.list), 463  
OneLineAvatarListItem (class in kivymd.uix.list.list), 463  
OneLineIconListItem (class in kivymd.uix.list.list), 463  
OneLineListIconItem (class in kivymd.uix.list.list), 463  
OneLineRightIconListItem (class in kivymd.uix.list.list), 463  
open() (kivymd.uix.backdrop.backdrop.MDBackdrop method), 163  
open() (kivymd.uix.bottomsheet.bottomsheet.MDBottomSheet method), 146  
open() (kivymd.uix.menu.menu.MDDropdownMenu method), 314  
open() (kivymd.uix.snackbar.snackbar.BaseSnackbar method), 345  
open\_card() (kivymd.uix.card.card.MDCardSwipe method), 241  
open\_panel() (kivymd.uix.expansionpanel.expansionpanel.MDExpansionPanel method), 287  
open\_progress (kivymd.uix.card.card.MDCardSwipe attribute), 239  
open\_progress (kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationDrawer attribute), 369  
open\_time (kivymd.uix.backdrop.backdrop.MDBackdrop attribute), 162  
open\_time (kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationDrawer attribute), 371  
open\_time (kivymd.uix.banner.banner.MDBanner attribute), 225  
opening\_time (kivymd.uix.button.button.MDFloatingActionButtonSpeedDial attribute), 136  
openMDCardSwipe (kivymd.uix.card.card.MDCardSwipe attribute), 239  
opening\_time (kivymd.uix.expansionpanel.expansionpanel.MDExpansionPanel attribute), 287  
opening\_time (kivymd.uix.menu.menu.MDDropdownMenu attribute), 311  
openMDPrime (kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationDrawer attribute), 370  
opening\_time\_button\_rotation (kivymd.uix.button.button.MDFloatingActionButtonSpeedDial attribute), 136  
opening\_timeout (kivymd.uix.banner.banner.MDBanner attribute), 225  
opening\_transition (kivymd.uix.backdrop.backdrop.MDBackdrop attribute), 162  
opening\_transition (kivymd.uix.banner.banner.MDBanner attribute), 224  
opening\_transition (kivymd.uix.button.button.MDFloatingActionButtonSpeedDial attribute), 136  
opening\_transition (kivymd.uix.card.card.MDCardSwipe attribute), 239  
opening\_transition (kivymd.uix.expansionpanel.expansionpanel.MDExpansionPanel attribute), 287  
opening\_transition (kivymd.uix.menu.menu.MDDropdownMenu attribute), 311  
opening\_transition (kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationDrawer attribute), 370  
opening\_transition\_button\_rotation (kivymd.uix.button.button.MDFloatingActionButtonSpeedDial attribute), 136  
opposite\_bg\_dark (kivymd.theming.ThemeManager attribute), 21  
opposite\_bg\_darkest (kivymd.theming.ThemeManager attribute), 21  
opposite\_bg\_light (kivymd.theming.ThemeManager attribute), 21  
opposite\_bg\_normal (kivymd.theming.ThemeManager attribute), 21

opposite\_colors (*kivymd.theming.ThemableBehavior* attribute), 27  
 opposite\_colors (*kivymd.uix.toolbar.toolbar.MDTopAppBar* attribute), 175  
 opposite\_disabled\_hint\_text\_color (*kivymd.theming.ThemeManager* attribute), 23  
 opposite\_disabled\_primary\_color (*kivymd.theming.ThemeManager* attribute), 22  
 opposite\_divider\_color (*kivymd.theming.ThemeManager* attribute), 22  
 opposite\_icon\_color (*kivymd.theming.ThemeManager* attribute), 22  
 opposite\_secondary\_text\_color (*kivymd.theming.ThemeManager* attribute), 22  
 opposite\_text\_color (*kivymd.theming.ThemeManager* attribute), 22  
 orientation (*kivymd.uix.progressbar.progressbar.MDProgressBar* attribute), 217  
 original\_argv (*in module kivymd.tools.hotreload.app*), 545  
 outer\_circle\_alpha (*kivymd.uix.taptargetview.MDTapTargetView* method), 544  
 outer\_circle\_color (*kivymd.uix.taptargetview.MDTapTargetView* method), 547  
 outer\_radius (*kivymd.uix.taptargetview.MDTapTargetView* attribute), 49  
 over\_widget (*kivymd.uix.banner.bannerMDBanner* attribute), 224  
 overflow\_action\_button\_is\_added() (*kivymd.uix.toolbar.toolbar.MDTopAppBar* method), 178  
 overflow\_cls (*kivymd.uix.toolbar.toolbar.MDTopAppBar* attribute), 176  
 overflow\_text (*kivymd.uix.toolbar.toolbar.ActionTopAppBarButton* attribute), 171  
 overlap (*kivymd.uix.imagelist.imagelist.MDSmartTile* attribute), 85  
 overlay\_color (*kivymd.uix.selection.selection.MDSelectionList* attribute), 246  
 owner (*kivymd.uix.pickers.datepicker.DatePicker* attribute), 268

**P**

padding (*kivymd.uix.backdrop.backdrop.MDBackdrop* attribute), 160  
 padding (*kivymd.uix.button.button.BaseButton* attribute), 128  
 padding (*kivymd.uix.button.button.MDFlatButton* attribute), 131  
 padding (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationDrawer* attribute), 368  
 padding (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationDrawer* attribute), 361

padding (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationDrawer* attribute), 360  
 padding (*kivymd.uix.navigationrail.navigationrail.MDNavigationRail* attribute), 199  
 pagination\_menu\_height (*kivymd.uix.datatables.datatables.MDDDataTable* attribute), 102  
 pagination\_menu\_pos (*kivymd.uix.datatables.datatables.MDDDataTable* attribute), 102  
 palette (*in module kivymd.color\_definitions*), 31  
 palette (*kivymd.uix.spinner.spinner.MDSpinner* attribute), 317  
 panel\_cls (*kivymd.uix.expansionpanel.expansionpanel.MDExpansionPanel* attribute), 287  
 panel\_color (*kivymd.uix.bottomnavigation.bottomnavigation.TabbedPanel* attribute), 435  
 parent\_background (*kivymd.uix.label.label.MDLabel* attribute), 293  
 parse\_args() (*kivymd.tools.argument\_parser.ArgumentParserWithHelp* method), 544  
 patch\_builder() (*kivymd.tools.hotreload.app.MDApp* method), 547  
 path (*in module kivymd*), 537  
 phone\_mask (*kivymd.uix.textfield.textfield.MDTextField* attribute), 377  
 pos\_hint (*kivymd.uix.list.list.IconLeftWidget* attribute), 464  
 pos\_hint (*kivymd.uix.list.list.IconLeftWidgetWithoutTouch* attribute), 464  
 pos\_hint (*kivymd.uix.list.list.IconRightWidget* attribute), 464  
 pos\_hint (*kivymd.uix.list.list.IconRightWidgetWithoutTouch* attribute), 464  
 position (*kivymd.uix.menu.menu.MDDropdownMenu* attribute), 311  
 prepare\_foreground\_lock() (*kivymd.tools.hotreload.app.MDApp* method), 547

previous\_tab (*kivymd.uix.bottomnavigation.bottomnavigation.TabbedPanel* attribute), 435

primary\_color (*kivymd.theming.ThemeManager* attribute), 13  
 primary\_color (*kivymd.uix.pickers.datepicker.DateDialog* attribute), 256  
 primary\_dark (*kivymd.theming.ThemeManager* attribute), 15  
 primary\_dark\_hue (*kivymd.theming.ThemeManager* attribute), 13  
 primary\_hue (*kivymd.theming.ThemeManager* attribute), 12  
 primary\_light (*kivymd.theming.ThemeManager* attribute), 12

attribute), 13  
primary\_light\_hue (kivymd.theming.ThemeManager attribute), 13  
primary\_palette (kivymd.theming.ThemeManager attribute), 11  
progress\_round\_color (kivymd.uix.selection.selection.MDSelectionList attribute), 246  
progress\_round\_size (kivymd.uix.selection.selection.MDSelectionList attribute), 246  
propagate\_touch\_to\_touchable\_widgets() (kivymd.list.list.BaseListItem method), 462  
pull\_back\_velocity (kivymd.effects.roulettescroll.rouletteScrollEffect attribute), 522  
pull\_duration (kivymd.effects.roulettescroll.rouletteScrollEffect attribute), 522  
PY3 (in module kivymd.tools.hotreload.app), 545

**R**

radio\_icon\_down (kivymd.uix.selectioncontrol.selectioncontrol.MDCheckbox attribute), 392  
radio\_icon\_normal (kivymd.uix.selectioncontrol.selectioncontrol.MDCheckbox attribute), 392  
radius (kivymd.uix.behaviors.backgroundcolor\_behavior.BackgroundColorBehavior attribute), 490  
radius (kivymd.uix.behaviors.stencil\_behavior.StencilBehavior attribute), 483  
radius (kivymd.uix.bottomsheet.bottomsheet.MDBottomSheet attribute), 145  
radius (kivymd.uix.card.card.MDCard attribute), 238  
radius (kivymd.uix.dialog.dialog.BaseDialog attribute), 407  
radius (kivymd.uix.list.list.BaseListItem attribute), 461  
radius (kivymd.uix.menu.menu.MDDropdownMenu attribute), 312  
radius (kivymd.uix.navigationrail.navigationrail.MDNavigationRail attribute), 199  
radius (kivymd.uix.pickers.datepicker.datepicker.BaseDialogPicker attribute), 255  
radius (kivymd.uix.segmentedcontrol.segmentedcontrol.MDSegmentedControl attribute), 403  
radius (kivymd.uix.sliverappbar.sliverappbar.MDSliverAppBar attribute), 155  
radius (kivymd.uix.snackbar.snackbar.BaseSnackbar attribute), 345  
radius (kivymd.uix.textfield.textfield.MDTextField attribute), 386  
radius\_color\_scale (kivymd.uix.pickers.colorpicker.colorpicker.MDCOLORSCALE attribute), 275  
radius\_from (kivymd.uix.bottomsheet.bottomsheet.MDBottomSheet attribute), 145

radius\_left (kivymd.uix.backdrop.backdrop.MDBackdrop attribute), 161  
radius\_right (kivymd.uix.backdrop.backdrop.MDBackdrop attribute), 161  
RAISE\_ERROR (kivymd.tools.hotreload.app.MDApp attribute), 546  
re\_additional\_icons (in module kivymd.tools.release.update\_icons), 559  
re\_icon\_definitions (in module kivymd.tools.release.update\_icons), 560  
re\_icons\_json (in module kivymd.tools.release.update\_icons), 559  
re\_quote\_keys (in module kivymd.tools.release.update\_icons), 560

rebuild() (kivymd.tools.hotreload.app.MDApp method), 547

refresh\_tabs() (kivymd.uix.bottomnavigation.bottonnavigation.MDBottomNavigation method), 437

register (in module kivymd.factory\_registers), 538

release (in module kivymd), 537

reload() (kivymd.uix.fitimage.fitimage.FitImage method), 349

remove\_notch() (kivymd.uix.toolbar.toolbar.MDTOPAPPBAR method), 108

remove\_shadow() (kivymd.uix.toolbar.toolbar.MDTOPAPPBAR method), 179

remove\_tooltip() (kivymd.uix.tooltip.tooltip.MDTooltip method), 220

remove\_widget() (kivymd.uix.bottomnavigation.bottonnavigation.MDBottomNavigation method), 438

remove\_widget() (kivymd.uix.circularlayout.MDCircularLayout method), 58

remove\_widget() (kivymd.list.list.BaseListItem method), 462

remove\_widget() (kivymd.uix.swiper.swiper.MDSwiper method), 547

RectangularElevationBehavior (class in kivymd.uix.behaviors.elevation), 513  
RectangularRippleBehavior (class in kivymd.uix.behaviors.ripple\_behavior), 495  
refresh\_callback (kivymd.uix.refreshlayout.refreshlayout.MDScrollView refresh\_callback), 437  
refresh\_done() (kivymd.uix.refreshlayout.refreshlayout.MDScrollView refresh\_done), 437  
refresh\_tabs() (kivymd.uix.bottomnavigation.bottonnavigation.MDBottomNavigation refresh\_tabs), 437

register (in module kivymd.factory\_registers), 538

release (in module kivymd), 537

reload() (kivymd.uix.fitimage.fitimage.FitImage method), 349

remove\_notch() (kivymd.uix.toolbar.toolbar.MDTOPAPPBAR method), 108

remove\_shadow() (kivymd.uix.toolbar.toolbar.MDTOPAPPBAR method), 179

remove\_tooltip() (kivymd.uix.tooltip.tooltip.MDTooltip method), 220

remove\_widget() (kivymd.uix.bottomnavigation.bottonnavigation.MDBottomNavigation method), 438

remove\_widget() (kivymd.uix.circularlayout.MDCircularLayout method), 58

remove\_widget() (kivymd.list.list.BaseListItem method), 462

remove\_widget() (kivymd.uix.swiper.swiper.MDSwiper method), 547

`method), 443`  
`remove_widget() (kivymd.uix.tab.tab.MDTabs method), 338`  
`replace_in_file() (in module kivymd.tools.release.make_release), 559`  
`required (kivymd.uix.textfield.textfield.MDTextField attribute), 377`  
`reset_active_color() (kivymd.uix.navigationdrawer.navigationdrawer.MNDNavigationDrawer.kivymd.uix.behaviors.ripple_behavior.CommonRipple attribute), 493`  
`resize_content_layout() (kivymd.uix.bottomsheet.bottomsheet.MDBottomSheet method), 147`  
`return_action_button_to_toolbar() (kivymd.uix.toolbar.toolbar.MDTopAppBar method), 177`  
`reversed (kivymd.uix.progressbar.progressbar.MDProgress attribute), 217`  
`right_action (kivymd.uix.banner.banner.MDBanner attribute), 225`  
`right_action_items (kivymd.uix.backdrop.backdrop.MDBackdrop attribute), 161`  
`right_action_items (kivymd.uix.toolbar.toolbar.MDTopAppBar attribute), 173`  
`right_pad (kivymd.uix.button.button.MDFloatingActionButtonBase attribute), 135`  
`right_pad_value (kivymd.uix.button.button.MDFloatingActionButtonBase attribute), 135`  
`right_text (kivymd.uix.navigationdrawer.navigationdrawer.MDNavigateEffect attribute), 365`  
`ripple_alpha (kivymd.uix.behaviors.ripple_behavior.CommonRipple attribute), 493`  
`ripple_behavior (kivymd.uix.card.card.MDCard attribute), 238`  
`ripple_canvas_after (kivymd.uix.behaviors.ripple_behavior.CommonRipple attribute), 494`  
`ripple_color (kivymd.theming.ThemeManager attribute), 23`  
`ripple_color_item (kivymd.uix.navigationrail.navigationrail.MDNavigateEffect attribute), 559`  
`ripple_duration (kivymd.uix.tab.tab.MDTabs attribute), 337`  
`ripple_duration_in_fast (kivymd.uix.behaviors.ripple_behavior.CommonRipple attribute), 494`  
`ripple_duration_in_slow (kivymd.uix.behaviors.ripple_behavior.CommonRipple attribute), 494`  
`ripple_duration_out (kivymd.uix.behaviors.ripple_behavior.CommonRipple attribute), 494`  
`ripple_func_in (kivymd.uix.behaviors.ripple_behavior.CommonRipple attribute), 495`  
`ripple_func_out (kivymd.uix.behaviors.ripple_behavior.CommonRipple attribute), 495`  
`ripple_rad_default (kivymd.uix.behaviors.ripple_behavior.CommonRipple attribute), 493`  
`ripple_scale (kivymd.uix.behaviors.ripple_behavior.CircularRippleBehavior attribute), 495`  
`ripple_scale (kivymd.uix.behaviors.ripple_behavior.RectangularRippleBehavior attribute), 495`  
`ripple_transition (kivymd.uix.navigationrail.navigationrail.MDNavigationRail attribute), 210`  
`root_button_anim (kivymd.uix.button.button.MDFloatingActionButtonSpeedDial attribute), 135`  
`root_layout (kivymd.uix.refreshlayout.refreshlayout.MDScrollViewRefreshLayout attribute), 90`  
`rotate_value_angle (kivymd.uix.behaviors.rotate_behavior.RotateBehavior attribute), 516`  
`rotate_widget (kivymd.uix.templates.rotatewidget.rotatewidget attribute), 516`  
`rotate_behavior (class in kivymd.uix.behaviors.rotate_behavior), 516`  
`rotate_widget (class in kivymd.uix.templates.rotatewidget.rotatewidget), 516`  
`roulette_scroll_effect (class in kivymd.uix.effects.roulettescroll.roulettescroll), 522`  
`rounded_button (kivymd.uix.button.button.BaseButton attribute), 130`  
`rounded_rectangular_elevation_behavior (class in kivymd.uix.behaviors.elevation), 513`  
`row_data (kivymd.uix.datatables.datatables.MDDDataTable attribute), 97`  
`row_spacing (kivymd.uix.circularlayout.MDCircularLayout attribute), 58`  
`rows_num (kivymd.uix.datatables.datatables.MDDDataTable attribute), 101`  
`run_pre_commit() (in module kivymd.uix.tab.tab.MDTabs attribute), 337`  
`running_away() (kivymd.uix.progressbar.progressbar.MDProgressBar method), 217`  
`running_duration (kivymd.uix.progressbar.progressbar.MDProgressBar attribute), 217`  
`running_transition (kivymd.uix.progressbar.progressbar.MDProgressBar attribute), 217`  
`scale_value_x (kivymd.uix.behaviors.scale_behavior.ScaleBehavior attribute), 476`  
`scale_value_y (kivymd.uix.behaviors.scale_behavior.ScaleBehavior attribute), 476`

scale\_value\_z (*kivymd.uix.behaviors.scale\_behavior.ScaleBehavior* attribute), 476  
ScaleBehavior (class in *kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationDrawer* attribute), 476  
ScaleWidget (class in *kivymd.uix.templates.scalewidget.scalewidget*), 524  
screen (*kivymd.uix.bottomsheet.bottomsheet.MDCustomBottomSheet* attribute), 365  
scrim\_alpha\_transition (*kivymd.uix.navigationdrawer.navigationdrawer.MDNumericUpDown* attribute), 370  
scrim\_color (*kivymd.uix.navigationdrawer.navigationdrawer.MDNumericUpDownBackground* attribute), 368  
scroll (*kivymd.effects.stiffscroll.stiffscroll.StiffScrollEffect* attribute), 518  
search (*kivymd.uix.filemanager.filemanager.MDFileManager* attribute), 425  
secondary\_font\_style (*kivymd.list.list.BaseListItem* attribute), 461  
secondary\_text (*kivymd.list.list.BaseListItem* attribute), 460  
secondary\_text\_color (*kivymd.theming.ThemeManager* attribute), 22  
secondary\_text\_color (*kivymd.list.list.BaseListItem* attribute), 460  
secondary\_theme\_text\_color (*kivymd.list.list.BaseListItem* attribute), 461  
segment\_color (*kivymd.uix.segmentedcontrol.segmentedcontrol.MDSegmentedControl* attribute), 402  
segment\_panel\_height (*kivymd.uix.segmentedcontrol.segmentedcontrol.MDSegmentedControl* attribute), 403  
segment\_switching\_duration (*kivymd.uix.segmentedcontrol.segmentedcontrol.MDSegmentedControl* attribute), 404  
segment\_switching\_transition (*kivymd.uix.segmentedcontrol.segmentedcontrol.MDSegmentedControl* attribute), 404  
sel\_day (*kivymd.uix.pickers.datepicker.MDDatePicker* attribute), 271  
sel\_month (*kivymd.uix.pickers.datepicker.MDDatePicker* attribute), 271  
sel\_year (*kivymd.uix.pickers.datepicker.MDDatePicker* attribute), 271  
select\_dir\_or\_file() (*kivymd.uix.filemanager.filemanager.MDFileManager* method), 426  
select\_directory\_on\_press\_button() (*kivymd.uix.filemanager.filemanager.MDFileManager* method), 426  
selected (in *kivymd.uix.selectioncontrol.selectioncontrol.MDCheckbutton* attribute), 394  
selected\_all() (*kivymd.uix.selection.selection.MDSelectionList* method), 247  
selected\_color (*kivymd.uix.navigationdrawer.navigationdrawer.MDNumericUpDownBackground* attribute), 376  
selected\_color\_background (*kivymd.uix.navigationrail.navigationrail.MDNavigationRail* attribute), 208  
selected\_mode (*kivymd.uix.selection.selection.MDSelectionList* attribute), 246  
selection (*kivymd.uix.filemanager.filemanager.MDFileManager* attribute), 426  
selection\_button (*kivymd.uix.filemanager.filemanager.MDFileManager* attribute), 426  
selector (*kivymd.uix.filemanager.filemanager.MDFileManager* attribute), 426  
selector\_color (*kivymd.uix.pickers.datepicker.BaseDialogPicker* attribute), 258  
separator\_color (*kivymd.uix.segmentedcontrol.segmentedcontrol.MDSegmentedControl* attribute), 403  
set\_radius() (*kivymd.uix.button.button.MDFloatingActionButton* method), 130  
set\_active\_underline\_color() (*kivymd.uix.textfield.textfield.MDTextField* attribute), 387  
set\_active\_underline\_width() (*kivymd.uix.textfield.textfield.MDTextField* attribute), 387  
set\_all\_colors() (*kivymd.uix.button.button.BaseButton* method), 130  
set\_bars\_color (*kivymd.uix.toolbar.toolbar.MDTopAppBar* attribute), 175  
set\_pickers\_colors() (in *kivymd.utils.set\_bars\_colors* module), 568  
set\_picker\_color() (*kivymd.uix.silverappbar.silverappbar.MDSilverAppbar* method), 152  
set\_button\_colors() (*kivymd.uix.button.button.BaseButton* method), 130  
set\_chevron\_down() (*kivymd.uix.expansionpanel.expansionpanel.MDExpansionPanel* method), 287  
set\_chevron\_up() (*kivymd.uix.expansionpanel.expansionpanel.MDExpansionPanel* method), 286

method), 287  
**set\_clearcolor\_by\_theme\_style()** (kivymd.theming.ThemeManager method), 25  
**set\_colors()** (kivymd.theming.ThemeManager method), 25  
**set\_colors\_to\_updated()** (kivymd.uix.textfield.textfield.MDTextField method), 387  
**set\_current()** (kivymd.uix.swiper.swiper.MDSwiper method), 443  
**set\_current\_selected\_item()** (kivymd.uix.navigationrail.navigationrail.MDNavigationRail method), 212  
**set\_default\_colors()** (kivymd.uix.segmentedcontrol.segmentedcontrol.MDSegmentedProperties method), 404  
**set\_default\_colors()** (kivymd.uix.textfield.textfield.MDTextField method), 387  
**set\_disabled\_color()** (kivymd.uix.button.button.BaseButton method), 130  
**set\_elevation()** (kivymd.uix.card.card.MDCard method), 238  
**set\_error()** (kivymd.tools.hotreload.app.MDApp method), 547  
**set\_error()** (kivymd.uix.pickers.datepicker.datepicker.DatePicker method), 268  
**set\_fade()** (kivymd.effects.fadingedge.fadingedge.FadingEdgeEffect method), 388  
**set\_fill\_color()** (kivymd.uix.textfield.textfield.MDTextField method), 387  
**set\_font\_size()** (kivymd.uix.button.button.MDFloatingActionButton method), 132  
**set\_headline\_font\_style()** (kivymd.uix.toolbar.toolbar.MDTopAppBar method), 177  
**set\_helper\_text\_color()** (kivymd.uix.textfield.textfield.MDTextField method), 387  
**set\_hint\_text\_color()** (kivymd.uix.textfield.textfield.MDTextField method), 387  
**set\_hint\_text\_font\_size()** (kivymd.uix.textfield.textfield.MDTextField method), 387  
**set\_icon()** (kivymd.uix.selectioncontrol.selectioncontrol.MDSwitch method), 399  
**set\_icon\_color()** (kivymd.uix.button.button.BaseButton method), 130  
**set\_icon\_left\_color()** (kivymd.uix.textfield.textfield.MDTextField method), 387  
**set\_icon\_right\_color()** (kivymd.uix.textfield.textfield.MDTextField method), 387  
**set\_item()** (kivymd.uix.dropdownitem.dropdownitem.MDDropDownItem method), 428  
**set\_line\_color()** (kivymd.uix.card.card.MDCard method), 238  
**set\_max\_length\_text\_color()** (kivymd.uix.textfield.textfield.MDTextField method), 387  
**set\_max\_text\_length()** (kivymd.uix.textfield.textfield.MDTextField method), 388  
**set\_md\_bg\_color()** (kivymd.uix.toolbar.toolbar.MDTopAppBar method), 178  
**set\_segmented\_properties()** (kivymd.uix.menu.menu.MDDropdownMenu method), 313  
**set\_month\_day()** (kivymd.uix.pickers.datepicker.datepicker.MDDatePicker method), 272  
**set\_new\_icon()** (kivymd.uix.backdrop.backdrop.MDBackdrop method), 163  
**set\_notch()** (kivymd.uix.toolbar.toolbar.MDTopAppBar method), 178  
**set\_notch\_rectangle()** (kivymd.uix.textfield.textfield.MDTextField method), 387  
**set\_picker\_labels()** (kivymd.uix.textfield.textfield.MDTextField method), 387  
**set\_pos\_bottom\_buttons()** (kivymd.uix.expansionpanel.expansionpanel.MDExpansionPanel method), 286  
**set\_pos\_hint\_text()** (kivymd.uix.textfield.textfield.MDTextField method), 387  
**set\_pos\_labels()** (kivymd.uix.button.button.MDFloatingActionButtonSpeedDial method), 139  
**set\_pos\_menu\_fab\_buttons()** (kivymd.uix.navigationrail.navigationrail.MDNavigationRail method), 213  
**set\_pos\_panel\_items()** (kivymd.uix.navigationrail.navigationrail.MDNavigationRail method), 212  
**set\_pos\_root\_button()** (kivymd.uix.button.button.MDFloatingActionButtonSpeedDial method), 139  
**set\_position\_to\_current\_year()** (kivymd.uix.pickers.datepicker.datepicker.MDDatePicker method), 272  
**set\_radius()** (kivymd.uix.button.button.BaseButton method), 130

set\_radius() (*kivymd.uix.card.card.MDCard* method), shadow\_offset (*kivymd.uix.dialog.dialog.BaseDialog* attribute), 407  
238  
set\_screen() (*kivymd.uix.responsivelayout.MDResponsive* method), 56  
shadow\_offset (*kivymd.uix.tab.tab.MDTabs* attribute), 337  
set\_selected\_widget() shadow\_radius (*kivymd.uix.behaviors.elevation.CommonElevationBehavior* attribute), 505  
(*kivymd.uix.pickers.datepicker.datepicker.MDDatePicker* attribute), 272  
shadow\_softness (*kivymd.uix.behaviors.elevation.CommonElevationBehavior* attribute), 506  
set\_shader\_string() shadow\_softness (*kivymd.uix.dialog.dialog.BaseDialog* attribute), 407  
(*kivymd.uix.behaviors.elevation.CommonElevationBehavior* attribute), 513  
set\_shadow() (*kivymd.uix.toolbar.toolbar.MDTopAppBar* method), 336  
shadow\_softness (*kivymd.uix.tab.tab.MDTabs* attribute), 336  
set\_size() (*kivymd.uix.button.button.MDFloatingActionButton* method), 132  
shadow\_softness\_size (*kivymd.uix.behaviors.elevation.CommonElevationBehavior* attribute), 507  
set\_size() (*kivymd.uix.button.button.MDIconButton* method), 131  
shake() (*kivymd.uix.behaviors.magic\_behavior.MagicBehavior* method), 497  
set\_size\_and\_radius() sheet\_list (*kivymd.uix.bottomsheet.bottomsheet.MDListBottomSheet* attribute), 148  
(*kivymd.uix.button.button.MDFloatingActionButton* method), 132  
set\_state() (*kivymd.uix.navigationdrawer.navigationdrawer.NavigationDrawer* method), 370  
shift\_left (*kivymd.uix.tooltip.tooltip.MDTooltip* attribute), 220  
set\_static\_underline\_color() shift\_right (*kivymd.uix.tooltip.tooltip.MDTooltip* attribute), 220  
(*kivymd.uix.textfield.textfield.MDTextField* method), 387  
shift\_y (*kivymd.uix.tooltip.tooltip.MDTooltip* attribute), 220  
set\_status\_bar\_color() show() (*kivymd.uix.filemanager.filemanager.MDFileManager* method), 426  
(*kivymd.uix.bottomnavigation.bottomnavigation.MDBottomNavigation* method), 225  
set\_style() (*kivymd.uix.card.card.MDCard* method), 238  
show() (*kivymd.uix.filemanager.filemanager.MDFileManager* method), 426  
set\_term\_vel() (*kivymd.effects.roulettescroll.roulettescroll.RouletteScroll* method), 522  
show\_hidden\_files (*kivymd.uix.filemanager.filemanager.MDFileManager* attribute), 425  
set\_text() (*kivymd.uix.textfield.textfield.MDTextField* method), 388  
show\_off (*kivymd.uix.slider.slider.MDSlider* attribute), 113  
set\_text\_color() (*kivymd.uix.button.button.BaseButton* method), 130  
show\_on () (*kivymd.uix.navigationdrawer.NavigationDrawer* method), 225  
set\_text\_full\_date() shrink() (*kivymd.uix.behaviors.magic\_behavior.MagicBehavior* method), 497  
(*kivymd.uix.pickers.datepicker.datepicker.MDDatePicker* method), 272  
size\_duration (*kivymd.uix.swiper.swiper.MDSwiper* attribute), 442  
set\_thumb\_icon() (*kivymd.uix.slider.slider.MDSlider* method), 113  
size\_transition (*kivymd.uix.swiper.swiper.MDSwiper* attribute), 442  
set\_time() (*kivymd.uix.pickers.timepicker.TimePicker* attribute), 442  
sleep() (*in module kivymd.utils.asynckivy*), 567  
method), 283  
set\_type\_banner() (*kivymd.uix.banner.banner.MDBanner* method), 225  
snackbar (*class in kivymd.uix.snackbar.snackbar*), 346  
set\_widget() (*kivymd.tools.hotreload.app.MDApp* method), 547  
snackbar\_animation\_dir (*kivymd.uix.snackbar.snackbar.BaseSnackbar* attribute), 345  
set\_x\_pos() (*kivymd.uix.textfield.textfield.MDTextField* method), 388  
snackbar\_x (*kivymd.uix.snackbar.snackbar.BaseSnackbar* attribute), 345  
shadow\_color (*kivymd.uix.behaviors.elevation.CommonElevationBehavior* attribute), 512  
snack\_bar () (*kivymd.uix.snackbar.snackbar.BaseSnackbar* attribute), 345  
shadow\_color (*kivymd.uix.tab.tab.MDTabs* attribute), 336  
sort\_by (*kivymd.uix.filemanager.filemanager.MDFileManager* attribute), 426  
shadow\_offset (*kivymd.uix.behaviors.elevation.CommonElevationBehavior* attribute), 510  
sort\_by\_desc (*kivymd.uix.filemanager.filemanager.MDFileManager* attribute), 426

**sorted\_on** (*kivymd.uix.datatables.datatables.MDDDataTable attribute*), 99  
**sorted\_order** (*kivymd.uix.datatables.datatables.MDDDataTable attribute*), 100  
**source** (*kivymd.uix.bottomsheet.bottomsheet.GridBottomSheetItem attribute*), 148  
**source** (*kivymd.uix.fitimage.fitimage.FitImage attribute*), 349  
**source** (*kivymd.uix.imagelist.imagelist.MDSmartTile attribute*), 87  
**source** (*kivymd.uix.label.label.MDIcon attribute*), 294  
**source** (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationDrawerHeader attribute*), 362  
**spacing** (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationDrawerHeader attribute*), 366  
**specific\_secondary\_text\_color** (*kivymd.uix.behaviors.backgroundcolor\_behavior.SpecifyBackgroundColorBehavior attribute*), 491  
**specific\_text\_color** (*kivymd.uix.behaviors.backgroundcolor\_behavior.SpecifyTextColorBehavior attribute*), 491  
**SpecificBackgroundColorBehavior** (class in *kivymd.uix.behaviors.backgroundcolor\_behavior*), 491  
**stack\_buttons** (*kivymd.uix.button.button.MDFloatingActionButtonSpeedDial attribute*), 138  
**standard\_increment** (*kivymd.theming.ThemeManager attribute*), 23  
**start()** (in module *kivymd.utils.asynckivy*), 567  
**start()** (*kivymd.effects.roulettescroll.roulettescroll.RouletteSwipeEffectSwipeWidth method*), 522  
**start()** (*kivymd.effects.stiffscroll.stiffscroll.StiffScrollEffectSwipeLeft method*), 519  
**start()** (*kivymd.uix.progressbar.progressbar.MDProgressBar attribute*), 217  
**start()** (*kivymd.uix.taptargetview.MDTapTargetView attribute*), 52  
**start()** (*kivymd.uix.transition.transition.MDFadeSlideTransition attribute*), 429  
**start()** (*kivymd.uix.transition.transition.MDTransitionBase switch\_lang method*), 429  
**start()** (*kivymd.utils.fpsmonitor.FpsMonitor method*), 568  
**start\_from** (*kivymd.uix.circularlayout.MDCircularLayout switch\_tab method*), 58  
**start\_ripple()** (*kivymd.uix.behaviors.ripple\_behavior.CircularLayoutStyles method*), 495  
**state** (*kivymd.uix.button.button.MDFloatingActionButtonSpeedDial attribute*), 136  
**state** (*kivymd.uix.card.card.MDCardSwipe attribute*), 239  
**state** (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationDrawerHeader attribute*), 369  
**state** (*kivymd.uix.taptargetview.MDTapTargetView attribute*), 436

**T**

**tab\_bar\_height** (*kivymd.uix.tab.tab.MDTabs attribute*), 337  
**tab\_header** (*kivymd.uix.bottomnavigation.bottomnavigation.MDBottomNavigation attribute*), 436

tab\_hint\_x (*kivymd.uix.tab.tab.MDTabs* attribute), 336  
tab\_indicator\_anim (*kivymd.uix.tab.tab.MDTabs* attribute), 335  
tab\_indicator\_height (*kivymd.uix.tab.tab.MDTabs* attribute), 335  
tab\_indicator\_type (*kivymd.uix.tab.tab.MDTabs* attribute), 335  
tab\_label (*kivymd.uix.tab.tab.MDTabsBase* attribute), 335  
tab\_label\_font\_style (*kivymd.uix.tab.tab.MDTabsBase* attribute), 335  
tab\_label\_text (*kivymd.uix.tab.tab.MDTabsBase* attribute), 335  
tab\_padding (*kivymd.uix.tab.tab.MDTabs* attribute), 335  
TabbedPanelBase (class in *kivymd.uix.bottomnavigation.bottomnavigation*), 435  
tablet\_view (*kivymd.uix.responsivelayout.MDResponsive* attribute), 55  
tabs (*kivymd.uix.bottomnavigation.bottomnavigation.TabbedPanel* attribute), 435  
tag (*kivymd.uix.hero.MDHeroFrom* attribute), 76  
tag (*kivymd.uix.hero.MDHeroTo* attribute), 76  
target\_circle\_color (*kivymd.uix.taptargetview.MDTapTargetView* attribute), 50  
target\_radius (*kivymd.uix.taptargetview.MDTapTargetView* attribute), 50  
target\_widget (*kivymd.effects.stiffscroll.StiffScrollView* attribute), 519  
temp\_font\_path (in module *kivymd.tools.release.update\_icons*), 559  
temp\_path (in module *kivymd.tools.release.update\_icons*), 559  
temp\_preview\_path (in module *kivymd.tools.release.update\_icons*), 559  
temp\_repo\_path (in module *kivymd.tools.release.update\_icons*), 559  
terminal\_velocity (*kivymd.effects.roulettescroll.RouletteEffect* attribute), 522  
tertiary\_font\_style (*kivymd.uix.list.list.BaseListItem* attribute), 461  
tertiary\_text (*kivymd.uix.list.list.BaseListItem* attribute), 460  
tertiary\_text\_color (*kivymd.uix.list.list.BaseListItem* attribute), 460  
tertiary\_theme\_text\_color (*kivymd.uix.list.list.BaseListItem* attribute), 461  
text (*kivymd.uix.banner.banner.MDBanner* attribute), 224  
text (*kivymd.uix.bottonnavigation.bottonnavigation.MDTab* attribute), 434  
text (*kivymd.uix.button.button.BaseButton* attribute), 129  
text (*kivymd.uix.chip.chip.MDChip* attribute), 471  
text (*kivymd.uix.dialog.dialog.MDDialog* attribute), 409  
text (*kivymd.uix.dropdownitem.dropdownitem.MDDropDownItem* attribute), 428  
text (*kivymd.uix.label.label.MDLabel* attribute), 293  
text (*kivymd.uix.list.list.BaseListItem* attribute), 460  
text (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationDrawer* attribute), 363  
text (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationDrawer* attribute), 360  
text (*kivymd.uix.navigationrail.navigationrail.MDNavigationRailItem* attribute), 193  
text (*kivymd.uix.snackbar.snackbar.Snackbar* attribute), 346  
text\_button\_cancel (*kivymd.uix.pickers.colorpicker.colorpicker.MDCol* attribute), 276  
text\_button\_color (*kivymd.uix.pickers.datepicker.datepicker.BaseDialog* attribute), 262  
text\_button\_ok (*kivymd.uix.pickers.colorpicker.colorpicker.MDCol* attribute), 276  
text\_color (*kivymd.theming.ThemeManager* attribute), 22  
text\_color (*kivymd.uix.button.button.BaseButton* attribute), 129  
text\_color (*kivymd.uix.chip.chip.MDChip* attribute), 471  
text\_color (*kivymd.uix.label.label.MDLabel* attribute), 293  
text\_color (*kivymd.uix.list.list.BaseListItem* attribute), 460  
text\_color (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavigatio* attribute), 364  
text\_color (*kivymd.uix.pickers.datepicker.datepicker.BaseDialogPICKER* attribute), 260  
text\_color\_active (*kivymd.uix.bottonnavigation.bottonnavigation.MD* attribute), 336  
text\_color\_active (*kivymd.uix.tab.tab.MDTabs* attribute), 336  
text\_color\_focus (*kivymd.uix.textfield.textfield.MDTextField* attribute), 386  
text\_color\_item\_active (*kivymd.uix.navigationrail.navigationrail.MDNavigati* attribute), 205  
text\_color\_item\_normal (*kivymd.uix.navigationrail.navigationrail.MDNavigati* attribute), 204  
text\_color\_normal (*kivymd.uix.bottonnavigation.bottonnavigation.MD* attribute), 435  
text\_color\_normal (*kivymd.uix.tab.tab.MDTabs* attribute), 335

*attribute), 336*  
**text\_color\_normal** (*kivymd.uix.textfield.textfield.MDTextField attribute*), 385  
**text\_colors** (*in module kivymd.color\_definitions*), 32  
**text\_current\_color** (*kivymd.uix.pickers.datepicker.BaseDialogPicker attribute*), 261  
**text\_font\_size** (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavi-  
gationDrawerHeader attribute*), 364  
**text\_font\_style** (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavi-  
gationDrawerHeader attribute*), 364  
**text\_halign** (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavi-  
gationDrawerHeader attribute*), 363  
**text\_right\_color** (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavi-  
gationDrawerItem attribute*), 365  
**text\_toolbar\_color** (*kivymd.uix.pickers.datepicker.BaseDialogPicker attribute*), 259  
**text\_weekday\_color** (*kivymd.uix.pickers.datepicker.MDDatePicker attribute*), 269  
**ThemableBehavior** (*class in kivymd.theming*), 26  
**theme\_cls** (*kivymd.app.MDApp attribute*), 29  
**theme\_cls** (*kivymd.theming.ThemableBehavior attribute*), 26  
**theme\_colors** (*in module kivymd.color\_definitions*), 32  
**theme\_font\_styles** (*in module kivymd.font\_definitions*), 35  
**theme\_icon\_color** (*kivymd.uix.button.button.BaseButton attribute*), 129  
**theme\_style** (*kivymd.theming.ThemeManager attribute*), 18  
**theme\_style\_switch\_animation** (*kivymd.theming.ThemeManager attribute*), 16  
**theme\_style\_switch\_animation\_duration** (*kivymd.theming.ThemeManager attribute*), 18  
**theme\_text\_color** (*kivymd.uix.button.button.BaseButton attribute*), 129  
**theme\_text\_color** (*kivymd.uix.label.label.MDLabel attribute*), 293  
**theme\_text\_color** (*kivymd.uix.list.list.BaseListItem attribute*), 460  
**ThemeManager** (*class in kivymd.theming*), 11  
**ThreeLineAvatarListItemIcon** (*class in kivymd.list.list*), 463  
**ThreeLineAvatarListItem** (*class in kivymd.list.list*), 463  
**ThreeLineIconListItemIcon** (*class in kivymd.uix.list.list*), 463  
**ThreeLineListItemIcon** (*class in kivymd.uix.list.list*), 463  
**ThreeLineRightIconListItemIcon** (*class in kivymd.list.list*), 463  
**thumb\_color\_active** (*kivymd.uix.selectioncontrol.selectioncontrol.MDSwitch attribute*), 396  
**thumb\_color\_active** (*kivymd.uix.slider.slider.MDSlider attribute*), 111  
**thumb\_color\_disabled** (*kivymd.uix.selectioncontrol.selectioncontrol.MDSwitch attribute*), 397  
**thumb\_color\_disabled** (*kivymd.uix.slider.slider.MDSlider attribute*), 397  
**thumb\_color\_inactive** (*kivymd.uix.selectioncontrol.selectioncontrol.MDSwitch attribute*), 397  
**time** (*kivymd.uix.pickers.timepicker.MDTimePicker attribute*), 283  
**title** (*kivymd.uix.backdrop.backdrop.MDBackdrop attribute*), 283  
**title** (*kivymd.uix.dialog.dialog.MDDialog attribute*), 283  
**title** (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavi-  
gationDrawer attribute*), 363  
**title** (*kivymd.uix.pickers.datepicker.datepicker.BaseDialogPicker attribute*), 254  
**title** (*kivymd.uix.tab.tab.MDTabsBase attribute*), 334  
**title** (*kivymd.uix.toolbar.toolbar.MDTopAppBar attribute*), 173  
**title\_color** (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavi-  
gationDrawer attribute*), 363  
**title\_font\_size** (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavi-  
gationDrawer attribute*), 363  
**title\_font\_style** (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavi-  
gationDrawer attribute*), 363  
**title\_halign** (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavi-  
gationDrawer attribute*), 363  
**title\_icon\_mode** (*kivymd.uix.tab.tab.MDTabs attribute*), 337  
**title\_icon\_mode** (*kivymd.uix.tab.tab.MDTabsBase attribute*), 334  
**title\_input** (*kivymd.uix.pickers.datepicker.datepicker.BaseDialogPicker attribute*), 253  
**title\_is\_capital** (*kivymd.uix.tab.tab.MDTabsBase attribute*), 335  
**title\_position** (*kivymd.uix.taptargetview.MDTapTargetView attribute*), 52  
**title\_text** (*kivymd.uix.taptargetview.MDTapTargetView attribute*), 51  
**title\_text\_bold** (*kivymd.uix.taptargetview.MDTapTargetView attribute*), 51  
**title\_text\_color** (*kivymd.uix.taptargetview.MDTapTargetView attribute*), 51  
**title\_text\_size** (*kivymd.uix.taptargetview.MDTapTargetView attribute*), 51  
**MDSwitch**, 51  
**Toast** (*class in kivymd.toast.kivytoast.kivytoast*), 542  
**toast()** (*in module kivymd.toast.androidtoast.androidtoast*), 540  
**toast()** (*in module kivymd.toast.kivytoast.kivytoast*), 540

542  
toast() (kivymd.toast.kivytoast.kivytoast.Toast method), transformation\_to\_dialog\_input\_date()  
542 (kivymd.uix.pickers.datepicker.datepicker.MDDatePicker method), 272  
toolbar\_cls (kivymd.uix.sliverappbar.sliverappbar.MDSliverAppbar transformation\_to\_dialog\_select\_year()  
attribute), 152 (kivymd.uix.pickers.datepicker.datepicker.MDDatePicker  
tooltip\_bg\_color (kivymd.uix.tooltip.tooltip.MDTooltip method), 272  
attribute), 219 transition(kivymd.uix.bottomnavigation.bottonnavigation.MDBottomNavigation  
tooltip\_bg\_color (kivymd.uix.tooltip.tooltip.MDTooltipViewClass attribute), 435 transition\_duration  
attribute), 221 (kivymd.uix.bottomnavigation.bottonnavigation.MDBottomNavigation  
tooltip\_display\_delay transition\_duration  
(kivymd.uix.tooltip.tooltip.MDTooltip at- (kivymd.uix.swiper.swiper.MDSwiper attribute), 442  
attribute), 220 transition\_max (kivymd.effects.stiffscroll.stiffscroll.StiffScrollEffect  
tooltip\_font\_style (kivymd.uix.tooltip.tooltip.MDTooltip attribute), 221 transition\_min (kivymd.effects.stiffscroll.stiffscroll.StiffScrollEffect  
attribute), 221 attribute), 518  
tooltip\_radius (kivymd.uix.tooltip.tooltip.MDTooltip transition\_max (kivymd.effects.stiffscroll.stiffscroll.StiffScrollEffect  
attribute), 220 attribute), 518  
tooltip\_radius (kivymd.uix.tooltip.tooltip.MDTooltipViewViewClass Translation (class in  
attribute), 221 kivymd.tools.patterns.MVC.libs.translation),  
tooltip\_text (kivymd.uix.tooltip.tooltip.MDTooltip at- 557  
attribute), 219 twist() (kivymd.uix.behaviors.magic\_behavior.MagicBehavior  
tooltip\_text (kivymd.uix.tooltip.tooltip.MDTooltipViewClass method), 497  
attribute), 221 TwoLineAvatarIconListItem (class in  
tooltip\_text\_color (kivymd.uix.tooltip.tooltip.MDTooltip kivymd.uix.list.list), 463  
attribute), 219 TwoLineAvatarListItem (class in kivymd.uix.list.list),  
tooltip\_text\_color (kivymd.uix.tooltip.tooltip.MDTooltipViewClass 463  
attribute), 221 TwoLineIconListItem (class in kivymd.uix.list.list),  
TOUCH\_TARGET\_HEIGHT (in module 463  
kivymd.material\_resources), 538 TwoLineListItem (class in kivymd.uix.list.list), 463  
TouchBehavior (class in TwoLineRightIconListItem (class in  
kivymd.uix.behaviors.touch\_behavior), 474 kivymd.uix.list.list), 463  
track\_color\_active (kivymd.uix.selectioncontrol.selectioncontrol.type (kivymd.uix.banner.MDBanner attribute),  
attribute), 398 225  
track\_color\_active (kivymd.uix.slider.slider.MDSlider type (kivymd.uix.button.button.MDFloatingActionButton  
attribute), 112 attribute), 132  
track\_color\_disabled type (kivymd.uix.dialog.dialog.MDDialog attribute), 413  
(kivymd.uix.selectioncontrol.selectioncontrol.MDSlider type (kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationDrawer  
attribute), 399 attribute), 366  
track\_color\_disabled type (kivymd.uix.navigationrail.navigationrail.MDNavigationRail  
(kivymd.uix.slider.slider.MDSlider attribute), 113 attribute), 202  
track\_color\_inactive type (kivymd.uix.progressbar.progressbar.MDProgressBar  
(kivymd.uix.selectioncontrol.selectioncontrol.MDSlider type (kivymd.uix.toolbar.toolbar.MDTopAppBar attribute),  
attribute), 398 174  
track\_color\_inactive type (kivymd.uix.pickers.colorpicker.colorpicker.MDCColorPicker  
(kivymd.uix.slider.slider.MDSlider attribute), 113 attribute), 275  
transformation\_from\_dialog\_input\_date() type\_color (kivymd.uix.pickers.datepicker.datepicker.MDDatePicker  
(kivymd.uix.pickers.datepicker.datepicker.MDDatePicker attribute), 272 attribute), 239  
transformation\_from\_dialog\_select\_year() type\_height (kivymd.uix.toolbar.toolbar.MDTopAppBar  
(kivymd.uix.pickers.datepicker.datepicker.MDDatePicker attribute), 177  
method), 272 attribute), 239  
uix\_path (in module kivymd), 537

**underline\_color** (*kivymd.uix.tab.tab.MDTabs* attribute), 336

**unfocus\_color** (*kivymd.uix.behaviors.focus\_behavior.FocusBehavior* attribute), 517

**unload\_app\_dependencies()** (*kivymd.tools.hotreload.app.MDApp* method), 547

**unselected\_all()** (*kivymd.uix.selection.selection.MDSelectionList* method), 247

**unselected\_color** (*kivymd.uix.selectioncontrol.selectioncontrol.MDCheckbutton* attribute), 394

**unzip\_archive()** (in *kivymd.tools.release.update\_icons*), 560

**update()** (*kivymd.effects.stiffscroll.stiffscroll.StiffScrollEffect* method), 519

**update\_action\_bar()** (*kivymd.uix.toolbar.toolbar.MDTopAppBar* method), 179

**update\_action\_bar\_text\_colors()** (*kivymd.uix.toolbar.toolbar.MDTopAppBar* method), 179

**update\_anchor\_title()** (*kivymd.uix.toolbar.toolbar.MDTopAppBar* method), 179

**update\_background\_origin()** (*kivymd.uix.behaviors.backgroundcolor\_behavior.BackgroundColorBehavior* method), 491

**update\_bar\_height()** (*kivymd.uix.toolbar.toolbar.MDTopAppBar* method), 179

**update\_calendar()** (*kivymd.uix.pickers.datepicker.datepicker.MDDatePicker* method), 272

**update\_calendar\_for\_date\_range()** (*kivymd.uix.pickers.datepicker.datepicker.MDDatePicker* method), 272

**update\_canvas()** (*kivymd.effects.fadingedge.FadingEdgeEffect* method), 520

**update\_canvas\_bg\_pos()** (*kivymd.uix.label.label.MDLabel* method), 294

**update\_color()** (*kivymd.uix.selectioncontrol.selectioncontrol.MDCheckbutton* method), 394

**update\_color\_slider\_item\_bottom\_navigation()** (*kivymd.uix.pickers.colorpicker.colorpicker.MDCard* method), 276

**update\_color\_type\_buttons()** (*kivymd.uix.pickers.colorpicker.colorpicker.MDCard* method), 276

**update\_floating\_radius()** (*kivymd.uix.toolbar.toolbar.MDTopAppBar* method), 179

**update\_font\_style()** (*kivymd.uix.label.label.MDLabel* method), 293

**update\_fps()** (*kivymd.utils.fpsmonitor.FpsMonitor* method), 568

**update\_height()** (*kivymd.uix.dialog.dialog.MDDialog* method), 417

**update\_icon()** (*kivymd.uix.selectioncontrol.selectioncontrol.MDCheckbutton* method), 394

**update\_icon\_color()** (*kivymd.uix.tab.tab.MDTabs* method), 394

**update\_icons()** (in *kivymd.tools.release.update\_icons*), 560

**update\_init\_py()** (in *kivymd.tools.release.make\_release*), 559

**update\_items()** (*kivymd.uix.dialog.dialog.MDDialog* method), 417

**update\_label\_text()** (*kivymd.uix.tab.tab.MDTabsBase* method), 335

**update\_md\_bg\_color()** (*kivymd.uix.card.card.MDCard* method), 238

**update\_md\_bg\_color()** (*kivymd.uix.toolbar.toolbar.MDTopAppBar* method), 179

**update\_overflow\_menu\_items()** (*kivymd.uix.toolbar.toolbar.MDTopAppBar* method), 359

**update\_primary\_color()** (*kivymd.uix.selectioncontrol.selectioncontrol.MDCheckbutton* method), 394

**update\_readme()** (in *kivymd.tools.release.make\_release*), 559

**update\_resolution()** (*kivymd.uix.behaviors.elevation.CommonElevationBehavior* method), 513

**update\_row()** (*kivymd.uix.datatables.datatables.MDDDataTable* method), 108

**update\_row\_data()** (*kivymd.uix.datatables.datatables.MDDDataTable* method), 106

**update\_stack\_rectangle()** (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationLayout* method), 359

**update\_segment\_panel\_width()** (*kivymd.uix.segmentedcontrol.segmentedcontrol.MDSegmentedControl* method), 404

**update\_seperator\_color()** (*kivymd.uix.segmentedcontrol.segmentedcontrol.MDSegmentedControl* method), 404

**update\_status()** (*kivymd.uix.navigationdrawer.navigationdrawer.MDNavigationLayout* method), 370

**update\_text\_full\_date()** (*kivymd.uix.pickers.datepicker.datepicker.MDDatePicker* method), 272

update\_velocity() (*kivymd.effects.roulettescroll.roulette.Scroll.RouletteScrollEffect method*), 523  
update\_velocity() (*kivymd.effects.stiffscroll.stiffscroll.StiffScrollViewAttribute*), 270  
update\_width() (*kivymd.uix.dialog.dialog.MDDialog method*), 416  
updated\_interval (*kivymd.utils.fpsmonitor.FpsMonitor attribute*), 568  
upload\_file() (*kivymd.tools.patterns.MVC.Model.database\_resldb.DataBase method*), 557  
url (*in module kivymd.tools.release.update\_icons*), 559  
use\_access (*kivymd.uix.filemanager.filemanager.MDFileManager attribute*), 425  
use\_overflow (*kivymd.uix.toolbar.toolbar.MDTopAppBar attribute*), 175  
use\_pagination (*kivymd.uix.datatables.datatables.MDDDataTable attribute*), 100  
use\_text (*kivymd.uix.bottomnavigation.bottomnavigation.MDBottomNavigation attribute*), 436

## V

validator (*kivymd.uix.textfield.textfield.MDTextField attribute*), 377  
valign (*kivymd.uix.button.button.BaseButton attribute*), 129  
value\_transparent (*kivymd.uix.bottomsheet.bottomsheet.MDBottomSheet attribute*), 146  
ver\_growth (*kivymd.uix.menu.menu.MDDropdownMenu attribute*), 310  
vertical\_pad (*kivymd.uix.banner.banner.MDBanner attribute*), 224

## W

widget (*kivymd.uix.taptargetview.MDTapTargetView attribute*), 49  
widget\_index (*kivymd.uix.bottomnavigation.bottomnavigation.MDBottomNavigation attribute*), 437  
widget\_pos (*kivymd.uix.behaviors.elevation.CommonElevationBehavior attribute*), 513  
widget\_position (*kivymd.uix.taptargetview.MDTapTargetView attribute*), 52  
widget\_style (*kivymd.theming.ThemableBehavior attribute*), 26  
width\_mult (*kivymd.uix.menu.menu.MDDropdownMenu attribute*), 305  
width\_mult (*kivymd.uix.swiper.swiper.MDSwiper attribute*), 442  
width\_offset (*kivymd.uix.dialog.dialog.MDDialog attribute*), 413  
WindowController (class *in kivymd.uix.controllers.windowcontroller*), 472  
wobble() (*kivymd.uix.behaviors.magic\_behavior.MagicBehavior method*), 497